


Marker for terminal blocks - UC-TM 6 GN CUS - 0824591

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Marker for terminal blocks, can be ordered: by sheet, green, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

Your advantages

- The UC-TM ... UniCard labeling range includes markers for products with tall marker grooves
- Marking service: Phoenix Contact can custom-mark all UniCard markers according to your specifications
- The multi-section marking strips are easy to fit and can be easily separated if required
- The sheets provide space for including function texts
- The markers support multi-line labeling
- The format automatically ensures printing with a high degree of positioning accuracy



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 359207
GTIN	4046356359207

Technical data

Dimensions

Width (a)	6 mm
-----------	------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 120 °C
Recommended storage conditions	23 °C/50 % relative humidity. Storage in a dry and dark place in the original packaging is recommended.

General

Color	green
Slot type	high
Components	free from silicone and halogen
Material	PA

Marker for terminal blocks - UC-TM 6 GN CUS - 0824591


Technical data

General

Flammability rating according to UL 94	V2
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Number of individual labels	80
Number of individual labels per row	10
Mounting type	snap into tall marker groove
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 2
Testing substances harmful to the wetting properties of lacquers (LABS conformity)	VW PV 3.10.7:2005-02
Result	Test passed
UV resistance	Following ISO 4892-2:2013-03
Result	Test passed
Test duration	96 h
Silicone-free	yes
Halogen-free	Yes

Drawings

Schematic diagram

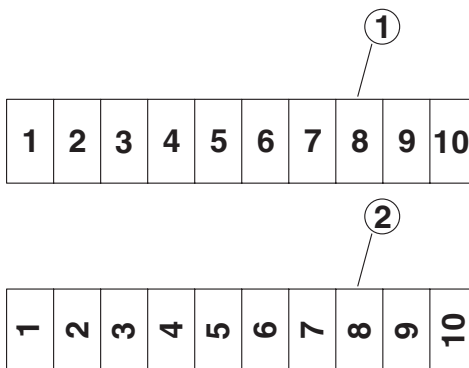

- ① Horizontal
- ② Vertical

Classifications

eCl@ss

eCl@ss 10.0.1	27141137
eCl@ss 11.0	27281101
eCl@ss 4.0	24190200
eCl@ss 4.1	24190200
eCl@ss 5.0	27141100
eCl@ss 5.1	27141100

Marker for terminal blocks - UC-TM 6 GN CUS - 0824591

Classifications

eCl@ss

eCl@ss 6.0	27141100
eCl@ss 7.0	27141137
eCl@ss 9.0	27141137

ETIM

ETIM 2.0	EC000761
ETIM 3.0	EC000761
ETIM 4.0	EC000761
ETIM 6.0	EC000761
ETIM 7.0	EC000761

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39131505
UNSPSC 18.0	39131505
UNSPSC 19.0	39131505
UNSPSC 20.0	39131505
UNSPSC 21.0	39131500

Phoenix Contact 2022 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact \(菲尼克斯\)](#)