

Distributed I/O device - FLM IOL4 DI4 M12 - 2736990

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The local bus device has 4 IO-Link ports of 200 mA. Functions: parallel processing of service and process data, 500 kbaud/2 Mbaud selection, short-circuit and overload protection, 800 mA nominal current, M12 fast connection technology.

Product description

The device serves to connect IO-Link devices.

Product Features

- ✓ Flexible power supply concept
- ✓ Short-circuit and overload protection
- ✓ Diagnostic and status indicators
- ✓ SPEEDCON fast locking system
- ✓ 4 IO-Link ports and 4 digital inputs
- ✓ Consistent connection via M12 connectors



IO-Link

Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	339.3 GRM
Custom tariff number	85389091
Country of origin	Germany

Technical data

Dimensions

Width	70 mm
Height	178 mm
Depth	50 mm
Drill hole spacing	168 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
---------------------------------	------------------

Distributed I/O device - FLM IOL4 DI4 M12 - 2736990

Technical data

Ambient conditions

Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (storage/transport)	95 %
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Degree of protection	IP65/IP67

General

Weight	280 g
Mounting type	Wall mounting
Mechanical tests	Shock in acc. with EN 60068-2-27/IEC 60068-2-27 Load 30g, half sine wave, positive and negative per direction
	Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6 5g in each space direction

Interfaces

Designation	Fieldline local bus
Connection method	M12 connector, B-coded
Designation connection point	Copper cable
Transmission speed	500 kBit/s / 2 MBit/s
Number of positions	5

Power supply for module electronics

Connection method	M12 connector
Designation	U _L
Supply voltage	24 V DC
Supply voltage range	18 V DC ... 30 V DC (including ripple)

Fieldline potentials

Voltage supply U _L	24 V DC
Power supply at U _L	max. 4 A
Current consumption from U _L	max. 150 mA (At 500 kBaud)
	typ. 75 mA (At 500 kBaud)
Voltage supply U _S	24 V DC
Power supply at U _S	max. 4 A
Current consumption from U _S	typ. 25 mA (plus power supply for sensors)
	max. 2 A

Digital inputs

Input name	Digital inputs
Connection method	M12 connector
	2, 3-wire

Distributed I/O device - FLM IOL4 DI4 M12 - 2736990

Technical data

Digital inputs

Number of inputs	4
------------------	---

Classifications

eCl@ss

eCl@ss 4.0	27240404
eCl@ss 4.1	27240404
eCl@ss 5.0	27242204
eCl@ss 5.1	27242604
eCl@ss 6.0	27242608
eCl@ss 7.0	27242608
eCl@ss 8.0	27242608

ETIM


ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC001604

UNSPSC


UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Drawings

Connection diagram

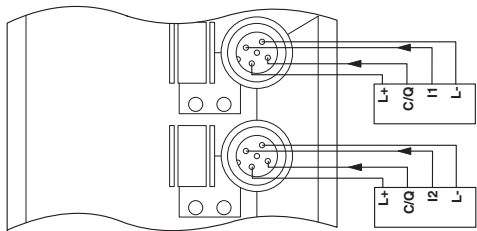

Dimensioned drawing

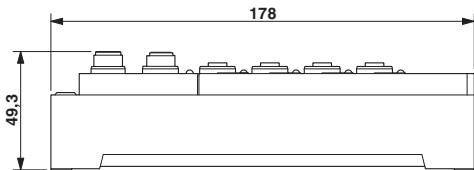

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)