

Mounting flange - HC-B 32/48-AF-SET - 1580523

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Panel mounting flange for screw locking, set comprising 2 panel mounting flanges with 4 self-tapping Torx® head screws and 4 fan-type washers



Key Commercial Data

Packing unit	1 pc
Custom tariff number	85389099
Country of origin	Germany

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 200 °C
---------------------------------	-------------------

General

Note	1 for every connector
Locking type	Screw locking
Material	Zinc die-cast
Assembly instructions	In order to guarantee that the ground conductor contact functions even when plugged in at an angle, the two panel mounting flanges must have sufficient electrical contact with the metal mounting panel.

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27189239
eCl@ss 5.1	27189239
eCl@ss 6.0	27261207

Mounting flange - HC-B 32/48-AF-SET - 1580523

Classifications

eCl@ss

eCl@ss 7.0	27440210
eCl@ss 8.0	27449290
eCl@ss 9.0	27440290

ETIM

ETIM 2.0	EC000007
ETIM 3.0	EC000007
ETIM 4.0	EC000437
ETIM 5.0	EC000211

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

EAC


Drawings

Mounting flange - HC-B 32/48-AF-SET - 1580523

Dimensional drawing

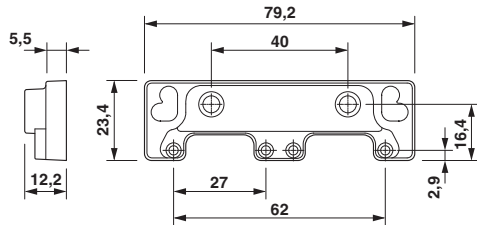

Dimensional drawing

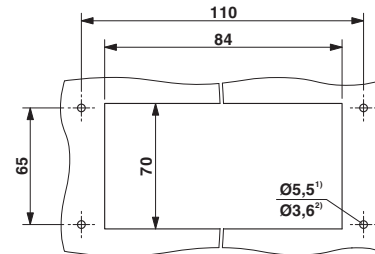

Mounting cutout

- 1) Standard M5 screw
- 2) Self-tapping (Torx® 20, M4)

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)