

## Cable sleeve - CES-STPG-GY-2X4 - 1410438

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Small, slotted cable sleeves suitable for two cables with a diameter of 3 ... 4 mm, material: SEBS

### Product Description

drilled special sleeve in IP44



### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
Weight per Piece (excluding packing)	8.0 g
Custom tariff number	85472000
Country of origin	Poland

### Technical data

#### Dimensions

External cable diameter	2x 3 mm ... 4 mm
Length	29.5 mm
Width	19.5 mm
Height	17 mm

#### Ambient conditions

Degree of protection	IP44
Ambient temperature (operation)	-40 °C ... 80 °C (static)

#### General

Product description	drilled special sleeve in IP44
No. of conductors	2
Material	SEBS
Flammability rating according to UL 94	V0

# Cable sleeve - CES-STPG-GY-2X4 - 1410438

## Technical data

### General

Color	gray
-------	------

### Standards and Regulations

Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

## Classifications

### eCl@ss

eCl@ss 4.0	27081002
eCl@ss 4.1	27081002
eCl@ss 5.0	27081002
eCl@ss 5.1	27081002
eCl@ss 6.0	27081002
eCl@ss 7.0	27081002
eCl@ss 8.0	27069216

### ETIM

ETIM 3.0	EC000879
ETIM 4.0	EC002498
ETIM 5.0	EC000451

### UNSPSC

UNSPSC 6.01	30212109
UNSPSC 7.0901	39121708
UNSPSC 11	39121708
UNSPSC 12.01	39121708
UNSPSC 13.2	39121708

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / cULus Recognized

---

#### Ex Approvals

## Cable sleeve - CES-STPG-GY-2X4 - 1410438



### Approvals

---

Approvals submitted


---

### Approval details



### Drawings

Dimensional drawing

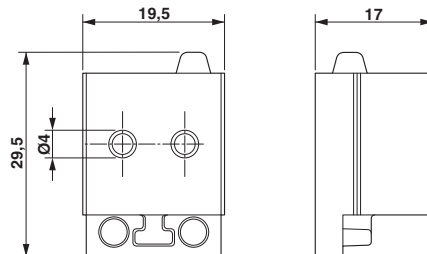

Dimensional drawing

---

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)