

Bus system cable - SAC-5P-MS/10,0-920 SCO - 1518193

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Bus system cable, CANopen[®], DeviceNet[™], CANopen[®]/DeviceNet[™], 5-position, PUR halogen-free, Violet, RAL 4001, shielded, Plug straight M12 SPEEDCON, A-coded, on Free cable end, Cable length: 10 m



Key commercial data

| | |
|--------------------------------------|---|
| Packing unit | 1 1 |
| GTIN |  4 017918 968311 |
| Weight per Piece (excluding packing) | 585.7 GRM |
| Custom tariff number | 85444290 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|--|-------|
| Length of cable | 10 m |
| Stripping length of the free conductor end | 50 mm |

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 |

General

| | |
|-----------------------|----------|
| Rated current at 40°C | 4 A |
| Rated voltage | 60 V |
| Number of positions | 5 |
| Contact resistance | ≤ 5 mΩ |
| Insulation resistance | ≥ 100 MΩ |

Bus system cable - SAC-5P-MS/10,0-920 SCO - 1518193

Technical data

General

| | |
|------------------------|------------------------|
| Coding | A - standard |
| Signal type/category | CANopen [®] |
| | DeviceNet [™] |
| Status display | No |
| Surge voltage category | II |
| Pollution degree | 3 |
| Torque | 0.4 Nm (M12 connector) |

Material

| | |
|---|---|
| Inflammability class according to UL 94 | HB |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |

Pin assignment

| | |
|--|------------------------|
| Position = wire color (signal) = position (optional) | 1 (Plug) = SR (shield) |
| | 2 (Plug) = RD (V+) |
| | 3 (Plug) = BK (V-) |
| | 4 (Plug) = WH (CAN_H) |
| | 5 (Plug) = BU (CAN_L) |

Cable

| | |
|-------------------------------------|---|
| Cable type | CAN Bus/DeviceNet |
| Cable type (abbreviation) | 920 |
| Conductor cross section | 2x 0.25 mm ² (signal line) |
| | 2x 0.34 mm ² (Power supply) |
| | 1x 0.34 mm ² (Drain wire) |
| AWG signal line | 24 |
| AWG power supply | 22 |
| Conductor structure signal line | 19x 0.13 mm |
| Conductor structure, voltage supply | 19x 0.15 mm |
| Core diameter including insulation | 1.95 mm ±0.05 mm (signal line) |
| | 1.4 mm ±0.05 mm (Power supply) |
| Wire colors | Red-black, blue-white |
| Twisted pairs | 2 cores to the pair |
| Type of pair shielding | Aluminum-lined polyester foil |
| Overall twist | 2 pairs around a drain wire in the center to the core |

Bus system cable - SAC-5P-MS/10,0-920 SCO - 1518193

Technical data

Cable

| | |
|---|---|
| Shielding | Tinned copper braided shield |
| Optical shield covering | 80 % |
| External sheath, color | Violet, RAL 4001 |
| External cable diameter D | 6.7 mm ±0.3 mm |
| Smallest bending radius, fixed installation | 67 mm |
| Smallest bending radius, movable installation | 67 mm |
| Number of bending cycles | 2000000 |
| Bending radius | 67 mm |
| Traversing path | 4.5 m |
| Traversing rate | 3 m/s |
| Acceleration | 3 m/s ² |
| Outer sheath, material | PUR |
| Material conductor insulation | Foamed PE (signal line) |
| | PE (Power supply) |
| Conductor material | Tin-plated Cu litz wires |
| Insulation resistance | ≥ 5 GΩ*km (signal line) |
| | ≥ 5 GΩ*km (Power supply) |
| Working capacitance | nom. 40 nF (signal line) |
| Wave impedance | 120 Ω ± 12 Ω (with 1 MHz) |
| Nominal voltage, cable | max. 300 V |
| Test voltage, cable | 2000 V (50 Hz, 1 min.) |
| Flame resistance | UL 1581, Sec. 1060 (FT-1) |
| | IEC 60332-1 |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -20 °C ... 70 °C (cable, flexible installation) |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27061801 |

Bus system cable - SAC-5P-MS/10,0-920 SCO - 1518193

Classifications

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Approvals

Approvals


Approvals

GOST

Ex Approvals

Approvals submitted


Approval details

| |
|--|
| GOST  |
|--|

Drawings

Bus system cable - SAC-5P-MS/10,0-920 SCO - 1518193

Schematic diagram




Pin assignment M12 male connector, 5-pos., A-coded, male side

Cable cross section




CAN Bus/DeviceNet [920]

Dimensioned drawing

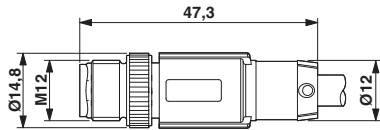

Plug, M12 x 1, straight, shielded

Circuit diagram

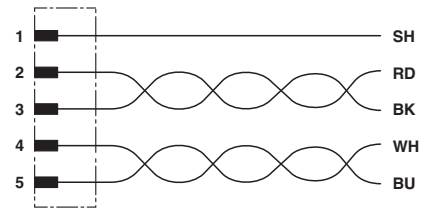

Contact assignment of the M12 plug

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact \(菲尼克斯\)](#)