

## Header - PTSM 0,5/ 3-HV-2,5-SMD WH R44 - 1778706

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 2.5 mm, Color: white, Contact surface: Tin, Mounting: Taped SMD/THT/THR components



### Key commercial data

Packing unit	1 pc
Minimum order quantity	500 pc
Weight per Piece (excluding packing)	1.5 GRM
Custom tariff number	85369010
Country of origin	Germany

### Technical data

#### Dimensions

Pitch	2.5 mm
Dimension a	5 mm
Pin spacing	2.50 mm

#### General

Range of articles	PTSM 0,5/..-HV-SMD
Insulating material group	I
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	125 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	250 V
Nominal current $I_N$	6 A
Maximum load current	6 A

# Header - PTSM 0,5/ 3-HV-2,5-SMD WH R44 - 1778706

## Technical data

### General

Insulating material	PA
Inflammability class according to UL 94	V0
Color	white
Number of positions	3

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402

### ETIM

ETIM 4.0	EC002637
ETIM 5.0	EC002637

### UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

## Approvals

### Approvals

---

#### Approvals

UL Recognized / UL Recognized

---

#### Ex Approvals

---

# Header - PTSM 0,5/ 3-HV-2,5-SMD WH R44 - 1778706


## Approvals

Approvals submitted

## Approval details



## Drawings

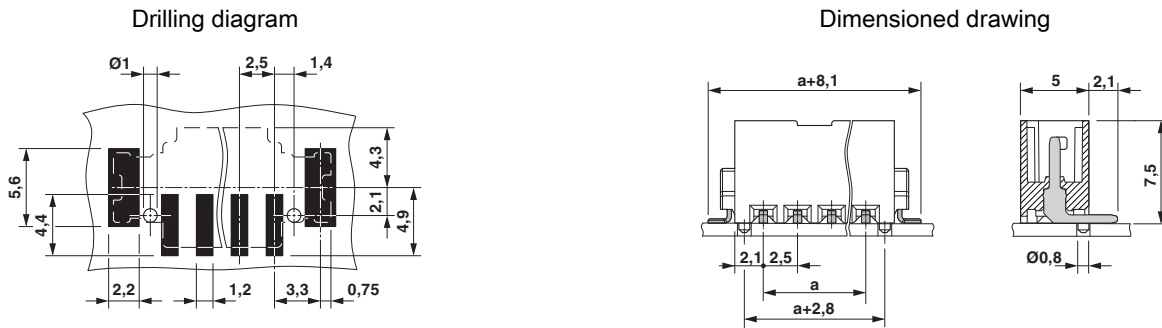

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)