

Panel mounting frames - VS-V1-F-RJ45-MNNA-1-C-S-JJ-S - 1419184

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



RJ45 mounting frame, IP67, for bayonet interlocking, metal, with socket-socket contact insert, for round mounting cutout, with seal, without mounting screws



Key commercial data

Packing unit	1 PCE
Catalog page	Page 291 (PC-2011)
GTIN	 4 046356 540377
Custom tariff number	85366990
Country of origin	GERMANY

Technical data

Mechanical characteristics

Number of positions	8
Number of slots	1
Insertion/withdrawal cycles	750
Ambient temperature (operation)	-40 °C ... 70 °C

Material data

Inflammability class according to UL 94	V0
Housing material	Zinc die-cast
Seal material	NBR
Degree of protection	IP67

Electrical characteristics

Number of positions	8
Transmission characteristics (category)	CAT5 (IEC 11801:2002), CAT5e (TIA 568B:2001)

Panel mounting frames - VS-V1-F-RJ45-MNNA-1-C-S-JJ-S - 1419184

Classifications

ETIM

ETIM 3.0	EC000376
ETIM 4.0	EC002310
ETIM 5.0	EC002310

UNSPSC


UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501
UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501

eCl@ss

eCl@ss 4.0	27140815
eCl@ss 4.1	27140815
eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27261207
eCl@ss 7.0	27440210

Drawings

Dimensioned drawing

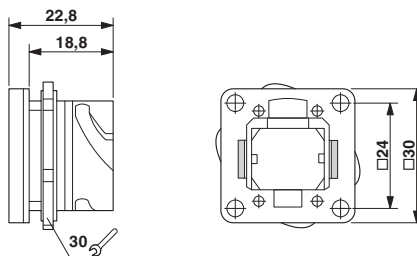

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)