

## Network cable - VS-PPC/PL-IP20-94F-LI/5,0 - 1415584

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Assembled Ethernet cable, CAT6, shielded, 4-pair, AWG 26 stranded (7-wire), RAL 5021 (water blue), RJ45 plug/IP67 push-pull plastic housing on RJ45 plug/IP20, line, length 5 m



### Key commercial data

|                                      |            |
|--------------------------------------|------------|
| Packing unit                         | 1 pc       |
| Weight per Piece (excluding packing) | 222.22 GRM |
| Custom tariff number                 | 85444210   |
| Country of origin                    | Poland     |

### Technical data

#### Mechanical characteristics

|                             |                    |
|-----------------------------|--------------------|
| Number of positions         | 8                  |
| Number of slots             | 1                  |
| Shielded                    | Yes                |
| Insertion/withdrawal cycles | ≥ 200              |
| Cable diameter              | 6.70 mm            |
| Cable exit                  | Straight           |
| Cable structure             | 4x2xAWG26/7; S/FTP |
| Length of cable             | 5 m                |

#### Ambient conditions

|                                 |   |
|---------------------------------|---|
| Ambient temperature (operation) | -20 °C ... 60 °C (cable, fixed installation)    |
|                                 | -10 °C ... 50 °C (cable, flexible installation) |
| Degree of protection            | IP67/IP20                                       |

#### Material data

|   |     |
|---|-----|
| Inflammability class according to UL 94 | V2  |
| Outer sheath, material                  | PUR |

# Network cable - VS-PPC/PL-IP20-94F-LI/5,0 - 1415584

## Technical data

### Material data

|                        |                     |
|------------------------|---------------------|
| External sheath, color | water blue RAL 5021 |
|------------------------|---------------------|

### Electrical characteristics

|   |      |
|---|------|
| Transmission characteristics (category) | CAT6 |
|---|------|

### Line characteristics

|   |  |
|---|--|
| Cable type                                    | Ethernet   |
| Cable structure                               | 4x2xAWG26/7; S/FTP   |
| Conductor cross section                       | 4x 2x 0.14 mm <sup>2</sup>   |
| AWG signal line                               | 26   |
| Conductor structure signal line               | 7x 0.16 mm   |
| Core diameter including insulation            | 1.04 mm  |
| Thickness, insulation                         | 0.28 mm (signal line)  |
|   | 0.65 mm (Outer cable sheath)   |
| External cable diameter                       | 6.4 mm ±0.2 mm   |
| Wire colors                                   | white/blue-blue, white/orange-orange, white/green-green, white/brown-brown |
| External sheath, color                        | water blue RAL 5021  |
| Transmission medium                           | Copper   |
| Insulation resistance                         | ≥ 500 MΩ*km (at 20 °C)   |
| Conductor resistance                          | ≤ 290000000 Ω/km (at 20 °C)  |
| Transmission characteristics (category)       | CAT6 <sub>A</sub>  |
| Wave impedance                                | 100 Ω ±5 Ω (at 100 MHz)  |
| Signal runtime                                | 5.3 ns/m   |
| Shield attenuation                            | ≥ 80 dB (at 30 ... 100 MHz)  |
| Nominal voltage, cable                        | ≤ 100 V (at 20 °C)   |
| Test voltage Core/Core                        | 700 V (50 Hz, 1 min.)  |
| Test voltage Core/Shield                      | 700 V (50 Hz, 1 min.)  |
| Twisted pairs                                 | 2 cores to the pair  |
| Type of pair shielding                        | Aluminum-lined polyester foil  |
| Overall twist                                 | 4 pairs  |
| Shielding                                     | Tinned copper braided shield   |
| Optical shield covering                       | 70 %   |
| Outer sheath, material                        | PUR  |
| Material conductor insulation                 | PE   |
| Conductor material                            | Bare Cu litz wires   |
| Cable weight                                  | 43 kg/km   |
| Smallest bending radius, fixed installation   | 25.6 mm  |
| Smallest bending radius, movable installation | 51.2 mm  |

## Network cable - VS-PPC/PL-IP20-94F-LI/5,0 - 1415584

### Technical data

#### Line characteristics

|                                       |   |
|---------------------------------------|---|
| Tensile strength short-term/long-term | ≤ 100 N   |
| Flame resistance                      | IEC 60332-1-2                                   |
| Halogen-free                          | According to IEC 60754-1                        |
| Resistance to oil                     | in accordance with DIN EN 60811-2-1             |
| Ambient temperature (operation)       | -40 °C ... 70 °C (cable, fixed installation)    |
|                                       | -10 °C ... 50 °C (cable, flexible installation) |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27060307 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27061801 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000830 |
| ETIM 4.0 | EC002599 |
| ETIM 5.0 | EC000830 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 26121616 |
| UNSPSC 7.0901 | 26121616 |
| UNSPSC 11     | 26121604 |
| UNSPSC 12.01  | 31261501 |
| UNSPSC 13.2   | 26121616 |

### Drawings


# Network cable - VS-PPC/PL-IP20-94F-LI/5,0 - 1415584

Cable cross section




Ethernet [94F]

Circuit diagram

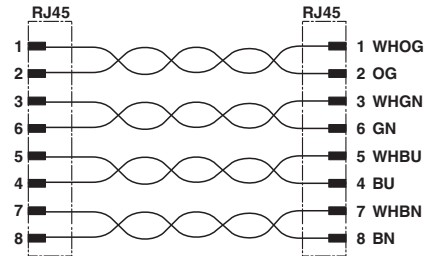


Dimensioned drawing



Push-pull RJ45 connector IP65/67

Dimensioned drawing

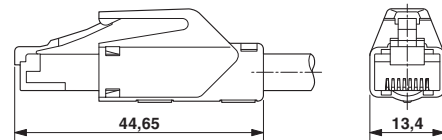

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)