

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

Housing cover, for connection on one side



Illustration shows a fully mounted version of the electronic housing

Product Features

- ☑ Tool-free mounting
- Date of manufacture and material and part identification embossed on the housing (recyclability)
- Fast snap-on mounting on symmetrical DIN rails according to EN 60715
- Functional and industry-oriented housing technology
- Goptimum accommodation of electronic components with graded pitches with a design width of 22.5 mm, 45 mm, 67.5 mm, and 90 mm
- Practical and easy-to-wire conductor connection using extra finely stranded sturdy screw terminal blocks up to 2.5 mm²
- Shock and contamination-proof accommodation of electronic components (IP40 housing, IP20 terminal blocks)



Key commercial data

| Packing unit | 1 pc |
|--------------------------------------|-----------|
| Minimum order quantity | 10 pc |
| Weight per Piece (excluding packing) | 16.24 GRM |
| Custom tariff number | 85369010 |
| Country of origin | Germany |

Technical data

General

| Housing type | Component housing | |
|---------------------------------|-------------------|--|
| Housing material | ABS | |
| Color | green | |
| Ambient conditions | | |
| Ambient temperature (operation) | 80 °C | |

10/24/2014 Page 1 / 9



Technical data

Dimensions

| Length | 75 mm |
|-----------------------|---------|
| Constructional height | 17.5 mm |
| Width | 67.5 mm |

Technical data

| Inflammability class according to UL 94 | НВ |
|---|----|
| Number of positions | 26 |

Classifications

eCl@ss

| eCl@ss 4.0 | 27180401 |
|------------|----------|
| eCl@ss 4.1 | 27180401 |
| eCl@ss 5.0 | 27180506 |
| eCl@ss 5.1 | 27180506 |
| eCl@ss 6.0 | 27180802 |
| eCl@ss 7.0 | 27182702 |
| eCl@ss 8.0 | 27182702 |

ETIM

| ETIM 2.0 | EC001031 |
|----------|----------|
| ETIM 3.0 | EC001031 |
| ETIM 4.0 | EC001031 |
| ETIM 5.0 | EC000886 |

UNSPSC

| UNSPSC 6.01 | 31261501 |
|---------------|----------|
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11 | 31261501 |
| UNSPSC 12.01 | 31261501 |
| UNSPSC 13.2 | 31261501 |

Approvals

Approvals

Approvals

UL Recognized



Approvals

Ex Approvals


Approvals submitted

Approval details

UL Recognized 🔊


Drawings

Dimensioned drawing



10/24/2014 Page 3 / 9




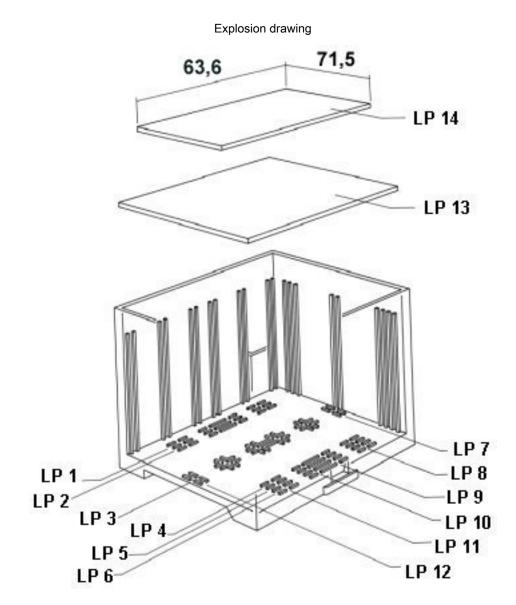

valid for PCB 13

10/24/2014 Page 4 / 9




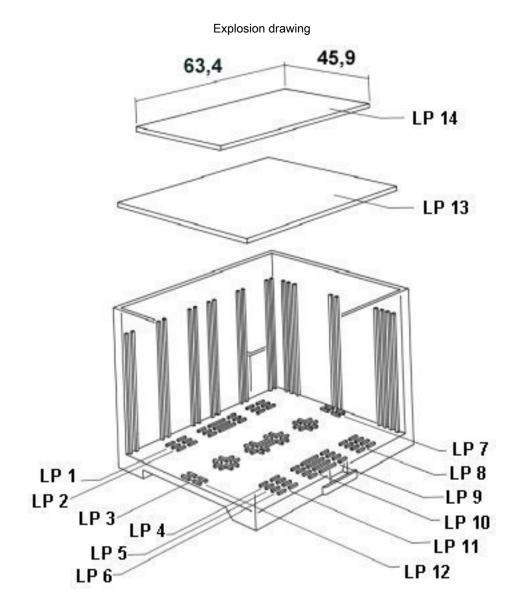

valid for PCB 14

10/24/2014 Page 5 / 9




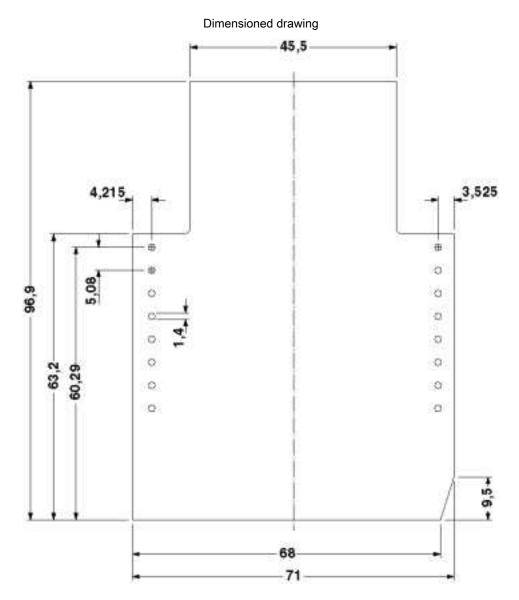

Component mounting side, if the double-level upper part is used

10/24/2014 Page 6 / 9




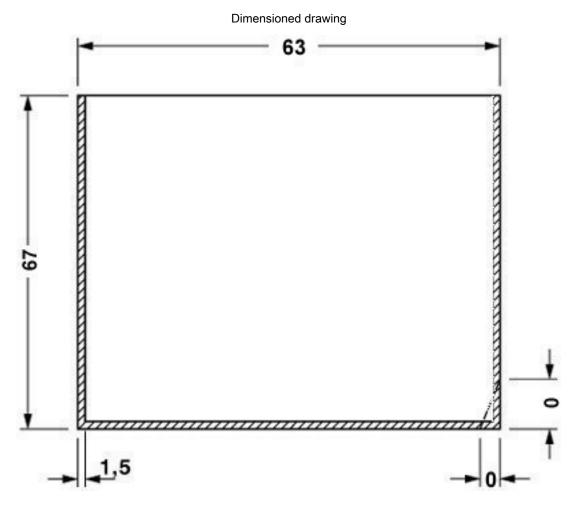

valid for PCB 1; 2; 3; 4; 5 und 6, see explosion drawing

10/24/2014 Page 7 / 9




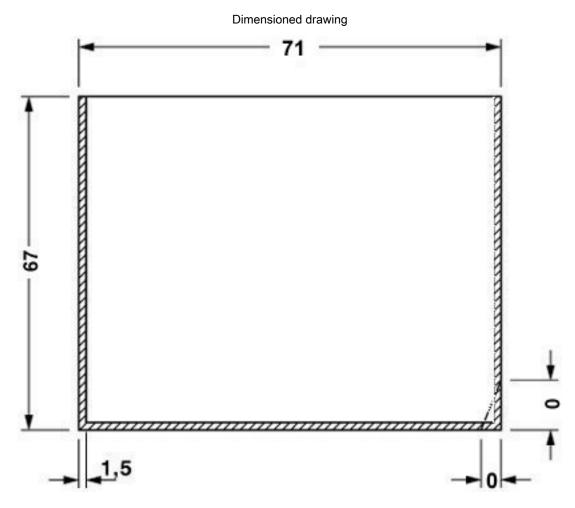

valid for PCB 7; 8; 11 and 12, see explosion drawing

10/24/2014 Page 8 / 9



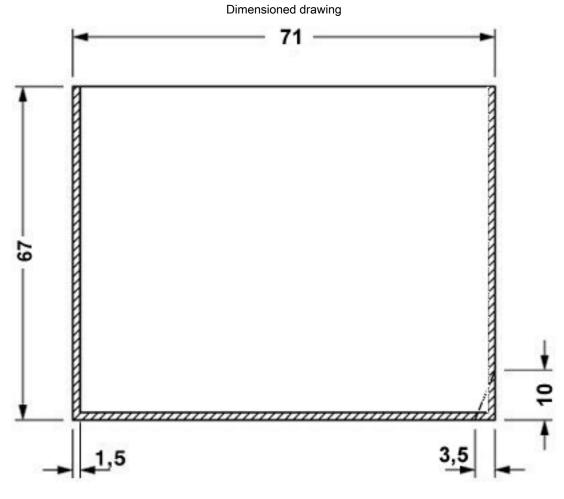

valid for PCB 9, see explosion drawing

Phoenix Contact 2014 © - all rights reserved http://www.phoenixcontact.com

10/24/2014 Page 9 / 9

>>Phoenix Contact(菲尼克斯)