

SACC-CI-M12MSD-4CON-L180 THR

Order No.: 1552214



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1552214>

Bus system flush-type plug, ETHERNET, 4-pos., D-coded, with straight THR solder connection, only contact insert

Commercial data

GTIN (EAN)	4 046356 162074
sales group	D125
Pack	60 pcs.
Customs tariff	85366990
Catalog page information	Page 33 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
04/13/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Rated current at 40°C	4 A
Rated voltage	250 V
Number of positions	4
Volume resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ


Ambient temperature (operation)	-25 °C ... 85 °C (Male connector / female connector)
---------------------------------	--

General characteristics

Standards/regulations	M12 connector IEC 61076-2-101
Coding	D - data
Surge voltage category	II
Pollution degree	3
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Sealing material	FKM / EPDM
Mounting type	PCB mounting
Type of connection	THR solder connection
Status display	No


Diagrams/Drawings

Drilling plan/solder pad geometry

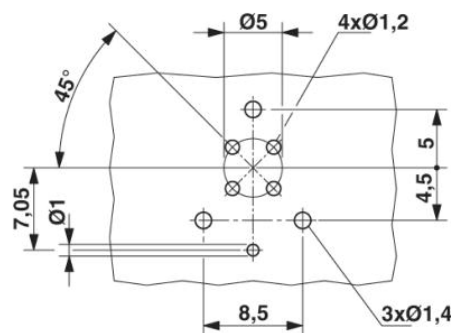


Drilling diagram

Dimensioned drawing

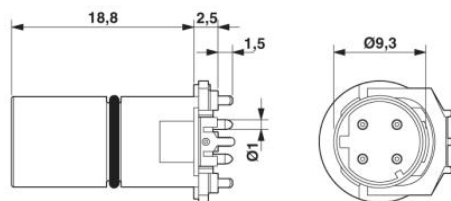


M12 male connector contact carrier

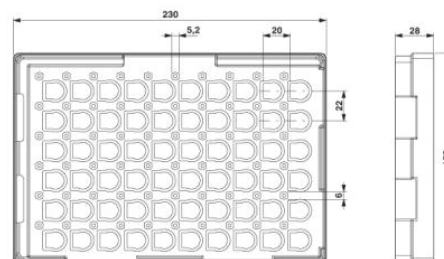

THR tray packaging

Schematic diagram

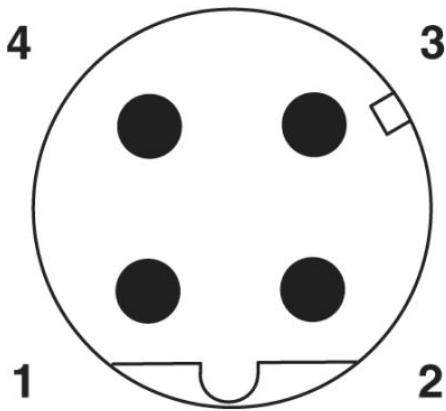

Pin assignment M12 male connector, 4-pos., D-coded, male side

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)