

Control cabinet - FB-15-SS - 2316190

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Stainless steel field junction box with 15 ports for use in hazardous locations. Includes FB-ET trunk module, Plugtrab base with option for surge protection plug, and DIN rail space for up to 12 device couplers.

Product Features

- ✓ Cable glands, plugs, and breather must be ordered separately
- ✓ Developed specifically for field device coupler systems
- ✓ Each housing has M20 ports and can be configured as desired
- ✓ Busbar and shield clamps
- ✓ Includes an FB-ET trunk line module and enables the installation of additional couplers and PT plugs
- ✓ Entries for the trunk line (input/output) and breather connections



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	8196.414 GRM
Custom tariff number	85371010
Country of origin	Malaysia

Technical data

Dimensions

Width	325 mm
Height	300 mm
Depth	121 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP66 / NEMA 4X

Control cabinet - FB-15-SS - 2316190

Technical data

General

Mounting position	Vertical
Net weight	4680 g
Housing material	Stainless steel, 316L, electropolished

Classifications

eCl@ss

eCl@ss 4.0	27250203
eCl@ss 4.1	27250203
eCl@ss 5.0	27250203
eCl@ss 5.1	27259205
eCl@ss 6.0	27242610
eCl@ss 7.0	27242610
eCl@ss 8.0	27242610

ETIM


ETIM 3.0	EC001600
ETIM 4.0	EC000261
ETIM 5.0	EC000261

UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	43201553

Drawings

Dimensioned drawing

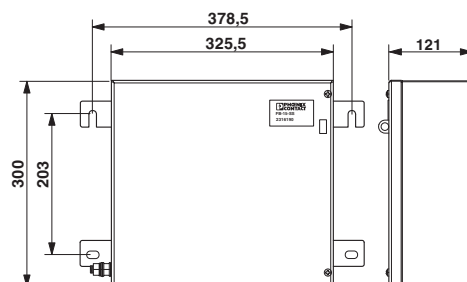

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)