

DC-B 6-CT-M

Order No.: 1602025



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1602025>

DUPLICON, aluminum housing cover, type B6, IP67 protection, with two M3 screws, V2A, captive, gasket and hole for retaining cord, for self-tapping M3 screw

Commercial data

GTIN (EAN)	4 046356 027724
sales group	D070
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 406 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
10/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Design	DC-B6
Height	18 mm
Width	67 mm
Length	67 mm

Color	pearl gray
Locking type	Screw locking
Protective cover	Yes
Degree of protection	IP65/IP66/IP67
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	EMC-conductive
Seal material	NBR

Certificates / Approvals




Certification VDE-PZI

Accessories

Item	Designation	Description
Marking		
0816854	EML (26,5X12)R SR	Labels for thermal transfer printers, lettering field: 26.5 mm x 12 mm, 1 roll = 2,500 labels

Diagrams/Drawings

Dimensioned drawing

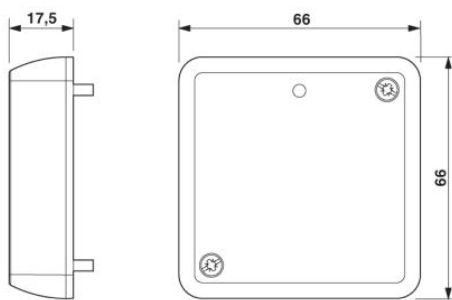

Dimensional drawing

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)