


## ZDMTK 2,5

Order No.: 3005798

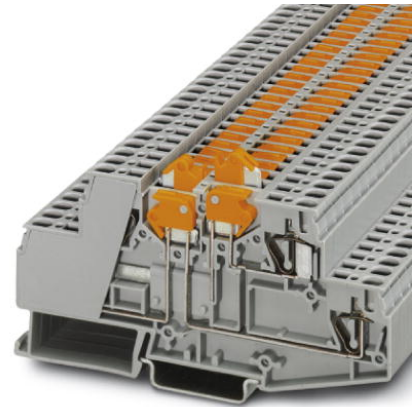

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3005798>

Disconnect and test disconnect terminal block, Connection type: Spring-cage connection, Cross section: 0.2 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 24 - 12, Nominal current: 16 A, Nominal voltage: 400 V, Length: 107 mm, Width: 6.2 mm, Color: gray

### Commercial data

|                          |                                                                                                     |
|--------------------------|-----------------------------------------------------------------------------------------------------|
| GTIN (EAN)               | 4 017918 146993  |
| sales group              | A640                                                                                                |
| Pack                     | 50 pcs.                                                                                             |
| Customs tariff           | 85369010                                                                                            |
| Catalog page information | Page 119 (CL-2009)                                                                                  |

### Product notes

WEEE/RoHS-compliant since: 01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General

|                       |      |
|-----------------------|------|
| Number of levels      | 2    |
| Number of connections | 4    |
| Color                 | gray |

|                                    |    |
|------------------------------------|----|
| Insulating material                | PA |
| Inflammability class acc. to UL 94 | V0 |

**Dimensions**

|                  |         |
|------------------|---------|
| Width            | 6.2 mm  |
| Length           | 107 mm  |
| Height NS 35/7.5 | 55 mm   |
| Height NS 35/15  | 62.5 mm |

**Technical data**

|                                  |                                                       |
|----------------------------------|-------------------------------------------------------|
| Maximum load current             | 20 A (with 4 mm <sup>2</sup> conductor cross section) |
| Rated surge voltage              | 6 kV                                                  |
| Pollution degree                 | 3                                                     |
| Surge voltage category           | III                                                   |
| Insulating material group        | I                                                     |
| Connection in acc. with standard | IEC 60947-7-1                                         |
| Nominal current I <sub>N</sub>   | 16 A                                                  |
| Nominal voltage U <sub>N</sub>   | 400 V                                                 |

**Connection data**

|                                                                                         |                        |
|-----------------------------------------------------------------------------------------|------------------------|
| Conductor cross section solid min.                                                      | 0.2 mm <sup>2</sup>    |
| Conductor cross section solid max.                                                      | 4 mm <sup>2</sup>      |
| Conductor cross section stranded min.                                                   | 0.2 mm <sup>2</sup>    |
| Conductor cross section stranded max.                                                   | 2.5 mm <sup>2</sup>    |
| Conductor cross section AWG/kcmil min.                                                  | 24                     |
| Conductor cross section AWG/kcmil max                                                   | 12                     |
| Conductor cross section stranded, with ferrule without plastic sleeve min.              | 0.14 mm <sup>2</sup>   |
| Conductor cross section stranded, with ferrule without plastic sleeve max.              | 2.5 mm <sup>2</sup>    |
| Conductor cross section stranded, with ferrule with plastic sleeve min.                 | 0.14 mm <sup>2</sup>   |
| Conductor cross section stranded, with ferrule with plastic sleeve max.                 | 2.5 mm <sup>2</sup>    |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 0.5 mm <sup>2</sup>    |
| Type of connection                                                                      | Spring-cage connection |
| Stripping length                                                                        | 10 mm                  |

## Certificates / Approvals



Certification

CUL, PRS, UL

## Accessories

| Item            | Designation                 | Description                                                                                                                                                                    |
|-----------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Assembly</b> |                             |                                                                                                                                                                                |
| 3005772         | ATP-ZFKKB 4                 | Partition plate, Length: 124 mm, Width: 2 mm, Height: 60 mm, Color: gray                                                                                                       |
| 3022218         | CLIPFIX 35                  | Snap-on end bracket, for 35 mm NS 35/7.5 or NS 35/15 DIN rail, can be fitted with Zack strip ZB 8 and ZB 8/27, terminal strip marker KLM 2 and KLM, width: 9.5 mm, color: gray |
| 1201413         | E/UK 1                      | End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray                                                                 |
| 0801762         | NS 35/ 7,5 CU UNPERF 2000MM | DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m                                                                                              |
| 0801733         | NS 35/ 7,5 PERF 2000MM      | DIN rail, material: Steel, galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2 m                                                   |
| 0801681         | NS 35/ 7,5 UNPERF 2000MM    | DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m                                                                                               |
| 1201756         | NS 35/15 AL UNPERF 2000MM   | DIN rail, deep-drawn, high profile, unperforated, 1.5 mm thick, material: Aluminum, height 15 mm, width 35 mm, length 2 m                                                      |
| 1201895         | NS 35/15 CU UNPERF 2000MM   | DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m                                                                                 |
| 1201730         | NS 35/15 PERF 2000MM        | DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m                                                                                                  |
| 1201714         | NS 35/15 UNPERF 2000MM      | DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m                                                                                                |
| 1201798         | NS 35/15-2,3 UNPERF 2000MM  | DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m                                                                                  |
| <b>Marking</b>  |                             |                                                                                                                                                                                |
| 1400133         | BNB-ZB 5,2:SO/CMS           | BNB Zack strip, special printing, 10-section, divisible, marking according to customer requirements                                                                            |
| 0805564         | WAZ 6                       | Warning cover, for ZFK spring-cage terminal block operating shafts, can be snapped into the test connections, for terminal width: 6.2 mm, color: yellow                        |

|         |               |                                                                                                               |
|---------|---------------|---------------------------------------------------------------------------------------------------------------|
| 0803650 | ZBFM 6:SO/CMS | Special printing, Zack marker sheet, flat, 100-section, divisible, marking according to customer requirements |
|---------|---------------|---------------------------------------------------------------------------------------------------------------|

**Plug/Adapter**



|         |             |                                      |
|---------|-------------|--------------------------------------|
| 3002843 | ISH 2,5/0,2 | Insulation stop sleeve, Color: white |
| 3002856 | ISH 2,5/0,5 | Insulation stop sleeve, Color: gray  |
| 3002869 | ISH 2,5/1,0 | Insulation stop sleeve, Color: black |

**Tools**

|         |               |                                                                                                                                                       |
|---------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1204517 | SZF 1-0,6X3,5 | Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip |
|---------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|

**Diagrams/Drawings**

Circuit diagram

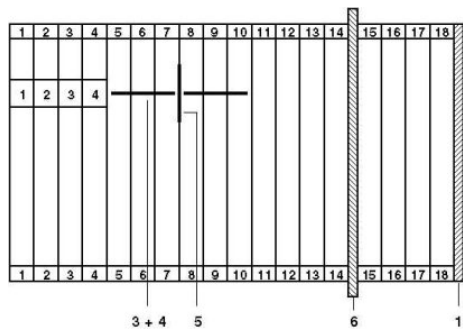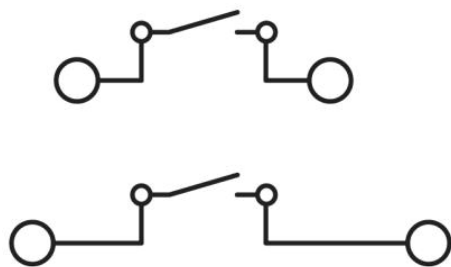

- 1 = cover
- 3 = fixed bridge
- 4 = plug-in bridge
- 5 = separating plate
- 6 = partition plate

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)