

Sensor/actuator cable - SAC-4P-MS/ 2,0-186/FS SCO - 1555716

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Sensor/actuator cable, 4-position, PUR, black-gray RAL 7021, Plug straight M12 SPEEDCON, coding: A, on Socket straight M12 SPEEDCON, coding: A, cable length: 2 m

Your advantages

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ Save time, thanks to installation with SPEEDCON fast locking system
- ✓ High-performance: connectors and cables with a large conductor cross section for power supply



Key Commercial Data

| | |
|--------------|--|
| Packing unit | 1 pc |
| GTIN |  4 046356 173711 |
| GTIN | 4046356173711 |

Technical data

Dimensions

| | |
|-----------------|-----|
| Length of cable | 2 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 |

General

| | |
|-----------------------|----------|
| Rated current at 40°C | 4 A |
| Rated voltage | 250 V AC |
| | 250 V DC |
| Number of positions | 4 |
| Insulation resistance | ≥ 100 MΩ |

Sensor/actuator cable - SAC-4P-MS/ 2,0-186/FS SCO - 1555716

Technical data

General

| | |
|------------------------------|--------------|
| Coding | A - standard |
| Status display | No |
| Protective circuit/component | unwired |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Insertion/withdrawal cycles | ≥ 100 |
| Tightening torque | 0.4 Nm |

Material

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |
| Sealing material | NBR |

Cable

| | |
|---|--------------------------------------|
| Cable type | PUR POWER 0.75 mm ² black |
| Cable type (abbreviation) | 186 |
| Cable abbreviation | LiY11Y |
| UL AWM style | 20549 / 1061 (80°C/300 V) |
| Conductor cross section | 4x 0.75 mm ² (power line) |
| AWG signal line | 18 |
| Conductor structure signal line | 42x 0.15 mm |
| Core diameter including insulation | 1.75 mm ±0.05 mm |
| Thickness, insulation | ≥ 0.23 mm (Core insulation) |
| | ≥ 0.76 mm (Outer cable sheath) |
| Wire colors | brown, white, blue, black |
| Overall twist | 4 wires, twisted |
| External cable diameter D | 5.9 mm ±0.15 mm |
| Smallest bending radius, movable installation | 59 mm |
| Minimum bending radius, fixed installation | 5 x D |
| Minimum bending radius, flexible installation | 10 x D |
| Number of bending cycles | 2000000 |
| Bending radius | 59 mm |
| Traversing path | 5 m |
| Traversing rate | 3 m/s |
| Acceleration | 5 m/s ² |
| Cable weight | 57 kg/km |
| External sheath, color | black-gray RAL 7021 |
| Outer sheath, material | PUR |

Sensor/actuator cable - SAC-4P-MS/ 2,0-186/FS SCO - 1555716

Technical data

Cable


| | |
|---------------------------------|---|
| Material conductor insulation | PVC |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | $\geq 1 \text{ M}\Omega \cdot \text{km}$ (at 20 °C) |
| Conductor resistance | max. 26 Ω/km (at 20 °C) |
| Nominal voltage, cable | $\leq 300 \text{ V}$ |
| Test voltage, cable | $\geq 3000 \text{ V}$ |
| Other resistance | hydrolysis and microbe resistant |
| | Low adhesion |
| | abrasion-resistant |
| | Resistant to salt water |
| Flame resistance | according to UL 758/1581 (horizontal) |
| | in accordance with UL 758/1581 FT2 |
| Resistance to oil | According to DIN EN 60811-2-1, 168 h at 100°C |
| Ambient temperature (operation) | -25 °C ... 80 °C (cable, fixed installation) |
| | -5 °C ... 80 °C (Cable, flexible installation) |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |


Drawings

Schematic diagram




Pin assignment M12 plug, 4-pos., A-coded, view plug side

Schematic diagram




Pin assignment M12 socket, 4-pos., A-coded, view female side

Dimensional drawing

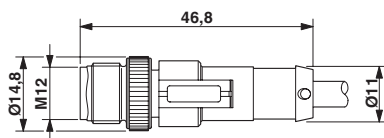

M12 SPEEDCON plug, straight


Dimensional drawing

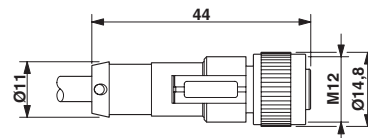

M12-SPEEDCON socket, straight


Sensor/actuator cable - SAC-4P-MS/ 2,0-186/FS SCO - 1555716

Circuit diagram

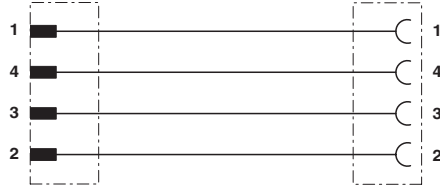

Contact assignment of the M12 plug and the M12 socket

Cable cross section

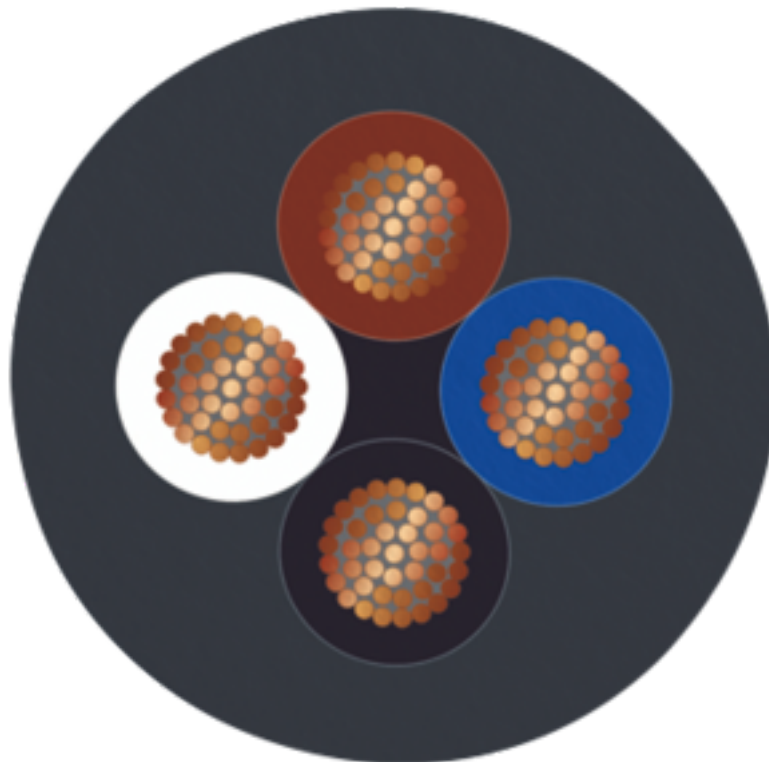

PUR POWER 0.75 mm² black [186]

Sensor/actuator cable - SAC-4P-MS/ 2,0-186/FS SCO - 1555716

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27060311 |
| eCl@ss 11.0 | 27060311 |
| eCl@ss 4.0 | 27060300 |
| eCl@ss 4.1 | 27060300 |
| eCl@ss 5.0 | 27061800 |
| eCl@ss 5.1 | 27061800 |
| eCl@ss 6.0 | 27279200 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 6.0 | EC001855 |
| ETIM 7.0 | EC001855 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |
| UNSPSC 19.0 | 31251501 |
| UNSPSC 20.0 | 31251501 |
| UNSPSC 21.0 | 26121600 |

Approvals

Approvals

Approvals

UL Listed / cUL Listed / EAC-RoHS / EAC / cULus Listed

Ex Approvals

Approval details

Sensor/actuator cable - SAC-4P-MS/ 2,0-186/FS SCO - 1555716

Approvals

| | | | |
|--------------------|--|---|---------------|
| UL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 221474 |
| Nominal voltage UN | | 300 V | |
| Nominal current IN | | 4 A | |

| | | | |
|--------------------|--|---|---------------|
| cUL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 221474 |
| Nominal voltage UN | | 300 V | |
| Nominal current IN | | 4 A | |

| | | |
|----------|--|--------------------------|
| EAC-RoHS | | RU D- DE.HB35.B.00387 |
|----------|--|--------------------------|

| | | |
|-----|--|--------------------------|
| EAC | | RU C- DE.BL08.B.00286 |
|-----|--|--------------------------|

| | |
|--------------|--|
| cULus Listed | |
|--------------|--|

Phoenix Contact 2022 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
 Flachsmarktstr. 8
 32825 Blomberg
 Germany
 Tel. +49 5235 300
 Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact \(菲尼克斯\)](#)