


SACC-V-3CON-M16/A-1L-S

Order No.: 1544714



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1544714>

Valve connector, 3-pos., type A, 1 LED, with protective circuit, screw connection, cable screw connection M16

Commercial data	
GTIN (EAN)	4 046356 116381 
sales group	D123
Pack	1 pcs.
Customs tariff	85444290
Catalog page information	Page 111 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
01/16/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data


General data	
Rated current at 40°C	4 A
Rated voltage	24 V
Number of positions	3
Ambient temperature (operation)	-25 °C ... 60 °C (valve plug)

General characteristics


Surge voltage category	II
Pollution degree	3
Degree of protection	IP65
Contact material	CuSn
Contact surface material	Ag
Valve plug contact insert material	PBT
Material, housing, valve plug	PA
Sealing material	NBR
Type of connection	Screw connection
Conductor cross section stranded min.	0.34 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	22
Conductor cross section AWG/kcmil max	13
External cable diameter	5 mm ... 10 mm
Status display	Yellow LED
Protective circuit/component	Z diode

Diagrams/Drawings

Dimensioned drawing

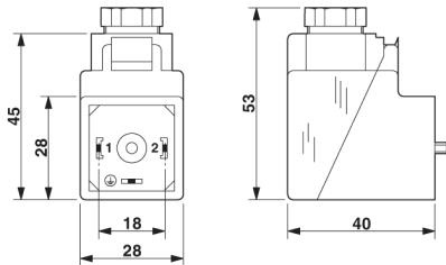

Circuit diagram

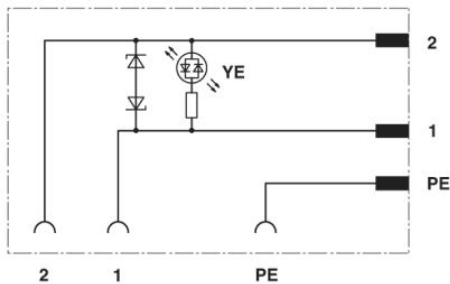

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact \(菲尼克斯\)](#)