

## Flush-type connector - SACC-SQ-M12MS-12CON-25F/0,5 - 1441587

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/actuator flush-type plug, 12-pos., M12, A-coded, front/square flange mounting, with 0.5 m TPE litz wire, 12 x 0.14 mm<sup>2</sup>

### Product Features

- ✓ 4 x fixing hole, 2.7 mm
- ✓ With form seal for M2.5 screws



### Key commercial data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 1      |
| Custom tariff number | 85444290 |
| Country of origin    | Germany  |

### Technical data

#### Dimensions

|                 |       |
|-----------------|-------|
| Length of cable | 0.5 m |
|-----------------|-------|

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |
| Degree of protection            | IP67                             |

#### General

|                       |                               |
|-----------------------|-------------------------------|
| Rated current at 40°C | 1.5 A                         |
| Rated voltage         | 30 V                          |
| Number of positions   | 12                            |
| Contact resistance    | ≤ 3 mΩ                        |
| Insulation resistance | ≥ 100 MΩ                      |
| Coding                | A - standard                  |
| Standards/regulations | M12 connector IEC 61076-2-101 |

## Flush-type connector - SACC-SQ-M12MS-12CON-25F/0,5 - 1441587

### Technical data

#### General

|                        |                              |
|------------------------|------------------------------|
| Status display         | No                           |
| Surge voltage category | II                           |
| Pollution degree       | 3                            |
| Connection method      | Individual wires             |
| Mounting type          | Front mounting Square flange |

#### Material

|                                         |                              |
|-----------------------------------------|------------------------------|
| Inflammability class according to UL 94 | V0                           |
| Contact material                        | CuZn                         |
| Contact surface material                | Ni/Au                        |
| Contact carrier material                | PA 66                        |
| Material, knurls                        | Zinc die-cast, nickel-plated |
| Sealing material                        | NBR                          |

#### Cable

|                                 |                                              |
|---------------------------------|----------------------------------------------|
| Cable type                      | TPE litz wire                                |
| Conductor cross section         | 0.14 mm <sup>2</sup>                         |
| AWG signal line                 | 26                                           |
| Wire colors                     | Color-coded DIN 47100                        |
| Material conductor insulation   | TPE                                          |
| Conductor material              | Tin-plated Cu litz wires                     |
| Ambient temperature (operation) | -25 °C ... 90 °C (cable, fixed installation) |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140815 |
| eCl@ss 4.1 | 27140815 |
| eCl@ss 5.0 | 27143423 |
| eCl@ss 5.1 | 27143423 |
| eCl@ss 6.0 | 27279220 |
| eCl@ss 7.0 | 27440103 |
| eCl@ss 8.0 | 27440103 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC001297 |
| ETIM 3.0 | EC002061 |
| ETIM 4.0 | EC002061 |

## Flush-type connector - SACC-SQ-M12MS-12CON-25F/0,5 - 1441587

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 5.0 | EC002061 |
|----------|----------|

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 39121413 |

### Approvals

#### Approvals

#### Approvals

UL Recognized / GOST / GOST

#### Ex Approvals

#### Approvals submitted

### Approval details

|                                                                                                   |       |
|---------------------------------------------------------------------------------------------------|-------|
| UL Recognized  |       |
| mm²/AWG/kcmil                                                                                     | 26-20 |
| Nominal current I <sub>N</sub>                                                                    | 1.5 A |
| Nominal voltage U <sub>N</sub>                                                                    | 30 V  |

|                                                                                          |
|------------------------------------------------------------------------------------------|
| GOST  |
|------------------------------------------------------------------------------------------|

Flush-type connector - SACC-SQ-M12MS-12CON-25F/0,5 - 1441587


Approvals

GOST




Drawings

Schematic diagram




Pin assignment M12 male connector, 12-pos., male side view

Dimensioned drawing

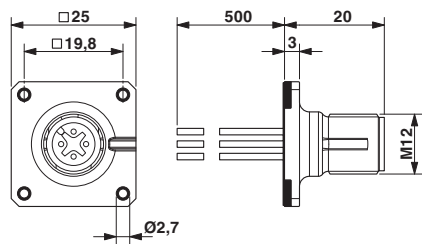

M12 flush-type plug

Circuit diagram

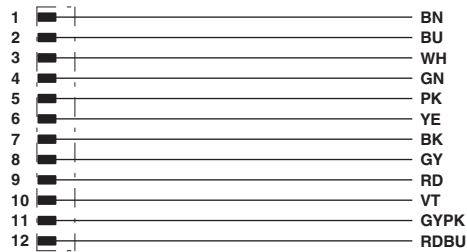

Contact assignment of the M12 plug

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)