


## Printed-circuit board connector - BCVP-500W-18 BK - 5452873

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid  
(<http://phoenixcontact.com/download>)



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 18, Pitch: 5 mm, Connection method: Screw connection with tension sleeve, Color: black, Contact surface: Tin

The figure shows a 5-pos. version of the product in gray



### Key Commercial Data

|                        |          |
|------------------------|----------|
| Packing unit           | 1 pc     |
| Minimum order quantity | 100 pc   |
| Custom tariff number   | 85366990 |
| Country of origin      | Germany  |

### Classifications

eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27261101 |
| eCl@ss 7.0 | 27141110 |
| eCl@ss 8.0 | 27440309 |
| eCl@ss 9.0 | 27440309 |

ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002638 |
| ETIM 5.0 | EC002638 |

## Printed-circuit board connector - BCVP-500W-18 BK - 5452873

### Classifications

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211801 |
| UNSPSC 7.0901 | 39121432 |
| UNSPSC 11     | 39121432 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121432 |

### Approvals

#### Approvals

#### Approvals

UL Recognized / cUL Recognized / VDE Gutachten mit Fertigungsüberwachung / IECCE CB Scheme / cULus Recognized

#### Ex Approvals

#### Approvals submitted

### Approval details

|                                                                                                   |       |       |
|---------------------------------------------------------------------------------------------------|-------|-------|
| UL Recognized  |       |       |
|                                                                                                   | B     | D     |
| mm²/AWG/kcmil                                                                                     | 30-12 | 30-12 |
| Nominal current I <sub>N</sub>                                                                    | 12 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                                    | 300 V | 300 V |

|                                                                                                    |       |       |
|----------------------------------------------------------------------------------------------------|-------|-------|
| cUL Recognized  |       |       |
|                                                                                                    | B     | D     |
| mm²/AWG/kcmil                                                                                      | 30-12 | 30-12 |
| Nominal current I <sub>N</sub>                                                                     | 12 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                                     | 300 V | 300 V |

## Printed-circuit board connector - BCVP-500W-18 BK - 5452873

### Approvals


VDE Gutachten mit Fertigungsüberwachung 

IECEE CB Scheme 


cULus Recognized 

### Drawings

Diagram

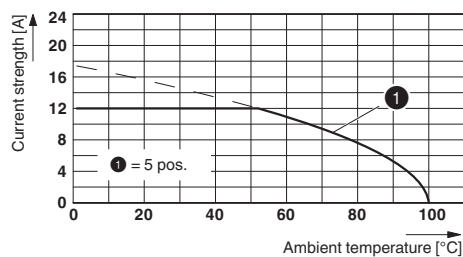

Dimensional drawing

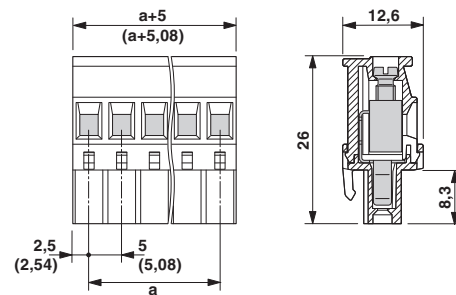

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)