

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Energy storage, VRLA-AGM, 24 V DC, 12 Ah, automatic detection and communication with QUINT UPS-IQ

Product Description

For continuous monitoring and intelligent management, there is constant communication with the QUINT UPS. Thanks to automatic detection of the energy storage, and tool-free switching during operation, quick installation is possible. The QUINT UPS with IQ technology energy storage leaves the warehouse fully charged.



Key Commercial Data

Packing unit	1 pc
GTIN	4 063151 466510
GTIN	4063151466510
Weight per Piece (excluding packing)	9,840.000 g
Custom tariff number	85072080
Country of origin	China

Technical data

Dimensions

Width	202 mm
Height	202 mm
Depth	110 mm
Installation distance right/left	0 mm / 0 mm
Installation distance top/bottom	50 mm / 50 mm

Ambient conditions

Degree of protection	IP20

12/03/2021 Page 1 / 5



Technical data

Ambient conditions

Ambient temperature (storage/transport)	-20 °C 40 °C
Ambient temperature (charge)	0 °C 40 °C
Ambient temperature (discharge)	-20 °C 50 °C
Max. permissible relative humidity (operation)	≤ 95 %
Degree of pollution	2

General

Protection class	III	
Degree of protection	IP20	
Degree of pollution	2	
Weight	9.2 kg	
Disposal	Used batteries must not be thrown away with household waste, they should instead be disposed of in accordance with applicable national regulations.	
Connection in parallel	yes	
	max. 5	
Connection in series	No	
Battery type	BB Battery BP 12-12FR	
Battery technology	VRLA-AGM	
IQ-Technology	yes	
Temperature sensor	yes	
Latest startup date (battery only)	12 Months (0 °C 20 °C)	
Latest startup (battery only) - range	9 Months 12 Months (20 °C 30 °C)	
	6 Months 9 Months (30 °C 40 °C)	
Accumulator module service life (according to Eurobat)	6 (20 °C)	
Size designation	Block	

Input data

Input voltage	24 V DC (SELV)
Nominal capacity	12 Ah
Charge current	3.6 A
End-of-charge voltage	27.6 V DC (20 °C)

Output voltage	24 V DC
Output current I _{max}	50 A
Output fuse	2x 25 A
Buffer time	22.5 min. (20 A)
	9 min. (40 A)

12/03/2021 Page 2 / 5




Technical data

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 8	
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"	

Drawings

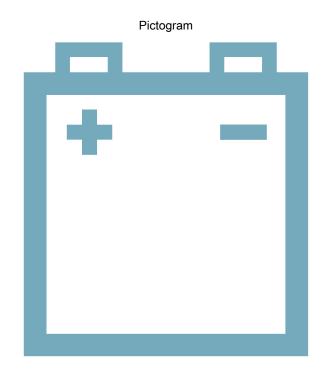

Classifications

eCl@ss

eCl@ss 11.0	27050403
ETIM	

ETIM 7.0 EC000357

Approvals

Approvals

Approvals

cULus Listed / EAC / DNV GL / cULus Listed / EAC

12/03/2021 Page 3 / 5



A	ppr	ΌV	als	

Ex Approvals

cULus Listed / cULus Listed

Approval details

cULus Listed cULus Listed

http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm

FILE E 123528

EAC [F]

RU D.GB09.W.0081/20

DNV GL	(ONV GL)	https://approvalfinder.dnvgl.com/	TAA0000265
Nominal voltage UN		500 V	
Nominal current IN		41 A	
mm²/AWG/kcmil		6	

cULus Listed



http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm

FILE E 123528

EAC



RU D.GB09.W.0081/20

Accessories

Accessories

Assembly adapter



Accessories

Mounting adapter - QUINT-ADAPTER/4 - 2866857

Assembly adapter for QUINT-BAT/24DC... on 35mm rail



Battery unit

Uninterruptible power supply replacement battery - UPS-BAT-KIT/PB/2X12V/12AH - 1283121



Replacement battery, VRLA-AGM, 2x12 V DC, 12 Ah

Fuse

Fuse - FUSE 25A/32V ATOF - 2908366



Fuse, nominal current: 25 A, length: 19.1 mm, width: 5 mm, height: 18.8 mm

Phoenix Contact 2021 © - all rights reserved http://www.phoenixcontact.com

单击下面可查看定价,库存,交付和生命周期等信息

>>Phoenix Contact(菲尼克斯)