

## base unit - NLC-055-100A-08I-04QRA-05A - 2700487

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



100...240 V AC Nanoline base unit. Equipped with 8 digital inputs and 4 relay output channels. Additional I/O channels can be added using a maximum of three I/O extension modules. Optional communication modules provide network or serial connectivity. Optional Operator Panel provides user interface. Programming is via nanoNavigator.



### Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	360.0 GRM
Custom tariff number	85371099
Country of origin	India

### Technical data

#### Dimensions

Width	80.5 mm
Height	103.5 mm
Depth	60 mm

#### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	90 %

#### Supply

Power supply connection	Screw connection
Supply voltage	240 V AC (Power available to the I/O and Communications modules)
Max. current consumption	70 mA (at 110 V AC)
Typical current consumption	50 mA (at 230 V AC)

#### Software interfaces

## base unit - NLC-055-100A-08I-04QRA-05A - 2700487

### Technical data

#### Software interfaces

Programming tool	nanoNavigator 3 or above
------------------	--------------------------

#### Digital inputs

Input name	Digital inputs
Description of the input	EN 61131-2 type 1 NPN/PNP
Connection method	Screw connection
Number of inputs	8
Typical response time	20 ms (on)
Input voltage range "0" signal	0 V ... 25 V
Input voltage range "1" signal	80 V ... 250 V
Nominal input current at $U_{IN}$	0.4 mA (On: 120 V AC)

#### Digital outputs

Output name	Relay output
Output description	Relay output
Connection method	Screw connection
Number of outputs	4
Protective circuit	External protection required
Maximum output current per channel	5 A
Maximum output current per module / terminal block	20 A
Maximum output current per module	5 A
Nominal load, ohmic	600 W (@ 24 ohms)

#### General

Mounting type	DIN rail
---------------	----------

### Classifications

#### eCl@ss

eCl@ss 4.0	27240101
eCl@ss 4.1	27240101
eCl@ss 5.0	27242216
eCl@ss 5.1	27242216
eCl@ss 6.0	27242216
eCl@ss 7.0	27242216
eCl@ss 8.0	27242216

#### ETIM

ETIM 3.0	EC001417
----------	----------

# base unit - NLC-055-100A-08I-04QRA-05A - 2700487

## Classifications

### ETIM

ETIM 4.0	EC001417
ETIM 5.0	EC001417

### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

## Approvals

### Approvals

---

Approvals

UL Listed

---

Ex Approvals

---

Approvals submitted

---


### Approval details

UL Listed 
---

## Drawings

# base unit - NLC-055-100A-08I-04QRA-05A - 2700487

Dimensioned drawing

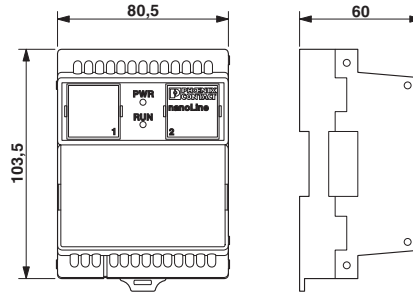

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)