

Orthogonal COMBICON headers for THR processes MSTBO 2,5/4-G1... THR R44 BK

The orthogonal COMBICON MSTBO 2,5/... headers with a 5.0 pitch are now available for use in the Through Hole Reflow process. Components can be mounted automatically on the PCB without any problems. The headers are made of highly temperature-resistant polyamide and are suitable for use in lead-free solder processes. There is a 4-pos. version available and versions with two and three positions will follow shortly. The integrated suction area allows cost and time-effective processing, since it is no longer necessary to remove a suction pad after processing. The headers are supplied in tapes, so that common feeder systems can be used. They can also be supplied in bulk.



COMBICON Select

The COMBICON search engine with CAD downloading




COMBICON Select – the printed circuit board connection software supports your workflow from the PCB and housing layout to the ordering process with:

- Systematic and fast selection of products
- Universal Internet aided engineering with extensive CAD downloading
- Easy-to-use e-shopping functions.



select.phoenixcontact.com/combicon

Orthogonal COMBICON headers
MSTBO 2,5/4-G1...THR R44 BK
5.0 mm Pitch

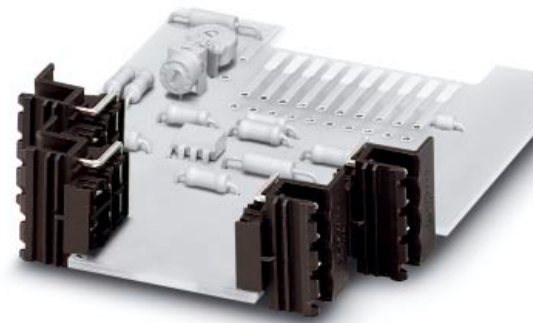


Description	No. of pos.	Dim. a [mm]
COMBICON header , for soldering onto the PCB, color: black, „PCB on the left“	4	15
COMBICON header , for soldering onto the PCB, color: black, „PCB on the right“	4	15
Technical data		
Dimensions		
Pitch		[mm]
Hole diameter		[mm]
Pin dimensions		[mm]x[mm]
Technical data in accordance with IEC/ DIN VDE		
Insulating material group		—
Surge voltage category / contamination class		—/—
Rated voltage		[V]
Rated surge voltage		[kV]
Nominal current / cross section		[A]/[mm²]
Maximum load current / cross section		[A]/[mm²]
Insulating material		
Inflammability class in acc. with UL 94		
Approval data (UL/CUL and CSA)		
Nominal voltage / current / conductor sizes	UL/CUL: [V]/[A]/AWG	


Type	Order No.	Pcs./Pkt.
MSTBO 2,5/4-G1L THR R44 BK	26 97 19 4	100
MSTBO 2,5/4-G1L THR R44 BK	26 97 20 4	100
see description		
5.0		
1.5		
1 x 1		
I		
III / 3	III / 2	II / 2
250	320	400
4	4	4
16 / —		
16 / —		
PA		
V0		
300 / 10 / ---		

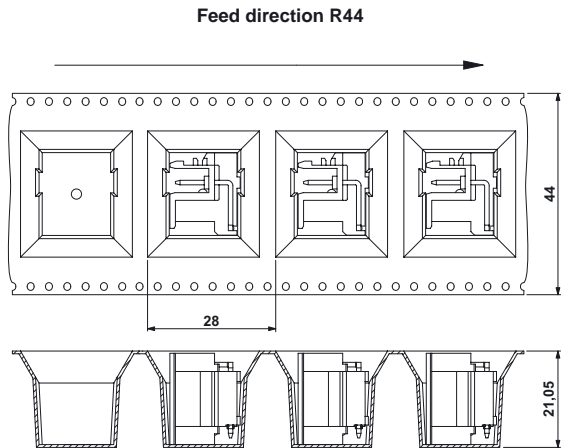



MSTBO 2,5/4-G1L THR R44 BK



MSTBO 2,5/4-G1R THR R44 BK



PCB Detail

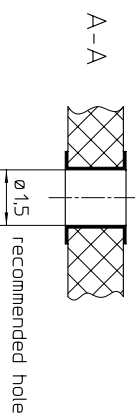


schematic description



free space for solder paste;





PDF Generiert von: evb02 am: 19-May-05 12:18:36 Dokumentstatus: 2 RELEASED

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)