

## Housing - HC-ADV-B16-CHF-1TTM25-EEE - 1408889

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



HEAVYCON ADVANCE B16 coupling housing, for M6 screw locking, salt-water-resistant aluminum, with 1 x M25 thread, straight cable outlet, without surface coating



### Key commercial data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 1      |
| Custom tariff number | 85389099 |
| Country of origin    | China    |

### Technical data

#### Dimensions

|        |          |
|--------|----------|
| Height | 72 mm    |
| Width  | 45 mm    |
| Length | 125.5 mm |

#### Ambient conditions

|                                 |                     |
|---------------------------------|---------------------|
| Schutzart Gehäuse (IP)          | IP65                |
|                                 | IP68 (0.2 bar/24 h) |
|                                 | IP69K               |
| Ambient temperature (operation) | -40 °C ... 125 °C   |

#### General

|                    |  |
|--------------------|--|
| Note               | For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K |
| Design             | B16  |
| Housing type       | Coupling housings                                      |
| Locking type       | Screw locking  |
| Fixing screws      | M6   |
| No. of cable exits | 1  |
| Cable exit         | Straight   |

# Housing - HC-ADV-B16-CHFH-1TTM25-EEE - 1408889

## Technical data

### General

|                              |   |
|------------------------------|---|
| Screw connection             | None                                    |
| Type of the screw connection | 1x M25                                  |
| Housing material             | Die-cast aluminum, salt water resistant |
| Housing surface material     | Uncoated                                |

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27261203 |
| eCl@ss 7.0 | 27440202 |
| eCl@ss 8.0 | 27440202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31261502 |
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11     | 31261502 |
| UNSPSC 12.01  | 31261502 |
| UNSPSC 13.2   | 31261502 |

## Accessories

### Accessories

#### Protective cover

Protective covers - HC-B 16-TMS-SD-IP65 - 1690794



HEAVYCON ADVANCE IP65 protective cover B16, for panel mounting side, with screw locking, with retaining cord, diameter of retaining cord eyelet 3 mm

# Housing - HC-ADV-B16-CHFh-1TTM25-EEE - 1408889

## Accessories


Protective covers - HC-B 16-TMS-SD-IP50 - 1690752



HEAVYCON ADVANCE IP50 protective cover B16, for panel mounting side, with clip locking, with retaining cord, diameter of retaining cord eyelet 3 mm


## Drawings

Dimensioned drawing

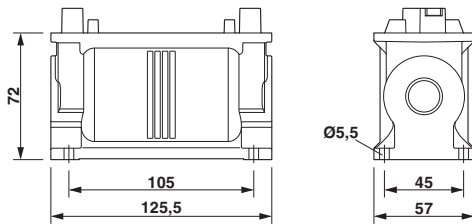

Dimensional drawing

Dimensioned drawing

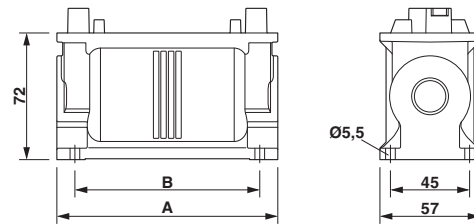

Dimensional drawing with letter dimension A

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)