

## Housing - HC-B 24-KML-H-O1M32 - 1460323

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid  
(<http://download.phoenixcontact.com>)



HEAVYCON B24 coupling housing, with single locking latch, height: 80.5 mm, with 1 x M32 gland, straight cable outlet



### Key commercial data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 pc     |
| Custom tariff number | 85389099 |
| Country of origin    | Germany  |

### Technical data

#### Dimensions

|        |        |
|--------|--------|
| Height | 82 mm  |
| Width  | 43 mm  |
| Length | 120 mm |

#### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

#### General

|                              |                                                 |
|------------------------------|-------------------------------------------------|
| Note                         | For contact inserts HC-B24, BB46, D64, DD108, M |
| Housing type                 | Coupling housings                               |
| Locking type                 | With single locking latch                       |
| No. of cable exits           | 1                                               |
| Cable exit                   | Straight                                        |
| Screw connection             | None                                            |
| Type of the screw connection | 1 x M32                                         |
| Housing material             | Aluminum die-cast                               |
| Housing surface material     | Powder-coated, gray                             |
| Seal material                | NBR                                             |

## Housing - HC-B 24-KML-H-O1M32 - 1460323

### Technical data

#### General

|                              |                                     |
|------------------------------|-------------------------------------|
| Material lock                | Stainless steel, handle: PA         |
| Material grip body interlock | PA                                  |
| Assembly instructions        | For half and full screw connections |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440209 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |


#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31261502 |
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11     | 31261502 |
| UNSPSC 12.01  | 31261502 |
| UNSPSC 13.2   | 31261502 |

### Drawings

## Housing - HC-B 24-KML-H-O1M32 - 1460323

Dimensioned drawing

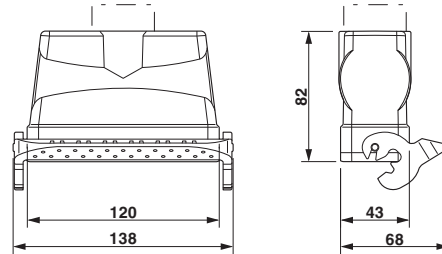

Dimensional drawing

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)