

# MSTBC-MT 1,5-2,5 BA


Order No.: 3190658

Supplied in tape form - please note the drawing.



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3190658>

Module female contact, is inserted into the MSTBC connector shell after the conductor has been crimped, for conductors from 1.5 - 2.5 mm<sup>2</sup>, ribbon contact

Commercial data	
GTIN (EAN)	4 017918 249267 
sales group	E192
Pack	3500 pcs.
Customs tariff	85366990
Catalog page information	Page 497 (CC-2009)

#### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>Technical data</b>	
Nominal current	12 A
Conductor cross section stranded min.	1.5 mm <sup>2</sup>
Max. conductor cross section, stranded	2.5 mm <sup>2</sup>

**Connection data**


Core diameter including insulation	2.11 mm ... 3.1 mm
Stripping length of individual wires	4 mm

**Material data**

Contact material	CuFe
Contact surface material	Tin-plated

**Diagrams/Drawings**

Dimensioned drawing

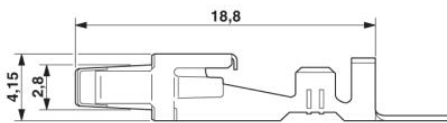

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)