


Order No.: 1766806

Type: GMSTBVA 2,5/ 5-G-7,62

## Header

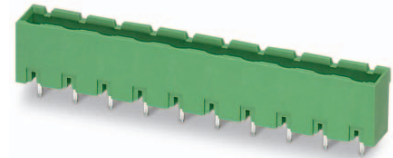

The figure shows a 10-position version of the product

## 1 Main features



- |                         |                     |                        |                     |
|-------------------------|---------------------|------------------------|---------------------|
| • No. of pos.           | 5                   | • Nominal current      | 12 A                |
| • Nominal cross section | 2.5 mm <sup>2</sup> | • Nominal voltage      | 630 V               |
| • Color                 | green               | • Connection direction | 90 °                |
| • Pitch                 | 7.62 mm             | • Type of packaging    | packed in cardboard |
| • Mounting type         | Wave soldering      |                        |                     |

## 2 Your advantages

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Well-known mounting principle allows worldwide use
- ✓ Larger pitch for increased voltage requirements
- ✓ Closed contour for optimum stability of the plug-in connection
- ✓ Vertical connection enables multi-row arrangement on the PCB




Make sure you always use the latest documentation.  
It can be downloaded at: [phoenixcontact.net/product/1766806](http://phoenixcontact.net/product/1766806)

**3 Table of contents**

1	Main features.....	1
2	Your advantages .....	1
3	Table of contents .....	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	item properties.....	4
	5.1 Material data .....	4
6	Dimensions.....	4
	6.1 Dimensions for the product .....	4
	6.2 Dimensions for PCB design.....	4
7	Series drawing.....	5
8	Packaging information .....	6
9	Application.....	6
	9.1 Temperature limit values .....	6
10	Mechanical tests.....	7
11	Electrical tests .....	8
	11.1 Electrical data.....	8
	11.2 Air and creepage distances.....	8
12	Current carrying capacity/derating curves .....	9
13	Environmental and durability tests .....	10
	13.1 Vibration test .....	10
14	Classification for connectors.....	10
15	Approvals .....	10
16	Commercial Data.....	12
17	corresponding plugs .....	12
18	Accessories.....	12
19	Combination tests.....	13

1766806 GMSTBVA 2,5/ 5-G-7,62

4 3D model in PDF can be activated (Acrobat Reader only)

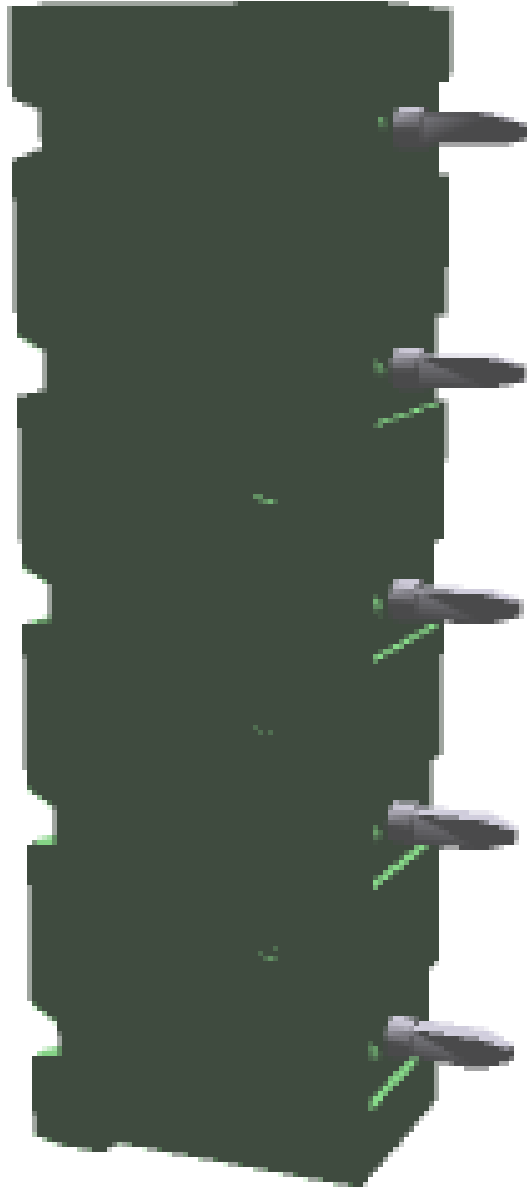

**1766806 GMSTBVA 2,5/ 5-G-7,62****5 item properties**

Order No.	1766806
Type	GMSTBVA 2,5/ 5-G-7,62
Type of contact	Male connector
Range of articles	GMSTBVA 2,5/...-G
Pitch	7.62 mm
Number of positions	5
Locking	without
Mounting type	Wave soldering
Pin layout	Linear pinning

**5.1 Material data**

<b>Material of metal parts</b>	
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface contact area	Ni 1.3 µm ... 3 µm , Sn 3 µm ... 5 µm
Soldering area surface	Ni 1.3 µm ... 3 µm , Sn 3 µm ... 5 µm
Surface characteristics	Tin-plated
<b>Insulating material data</b>	
Insulating material	PA
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Color	green (6021)
Glow wire flammability index GWFI according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

**6 Dimensions****6.1 Dimensions for the product**


Length	8.6 mm
Width	38.1 mm
Height (without solder pin)	12 mm
Total height	15.9 mm
Solder pin [P]	3.9 mm
Dimension a	30.48 mm

**6.2 Dimensions for PCB design**

Hole diameter	1.4 mm
Pin dimensions	1,0 x 1,0

1766806 GMSTBVA 2,5/ 5-G-7,62

7 Series drawing

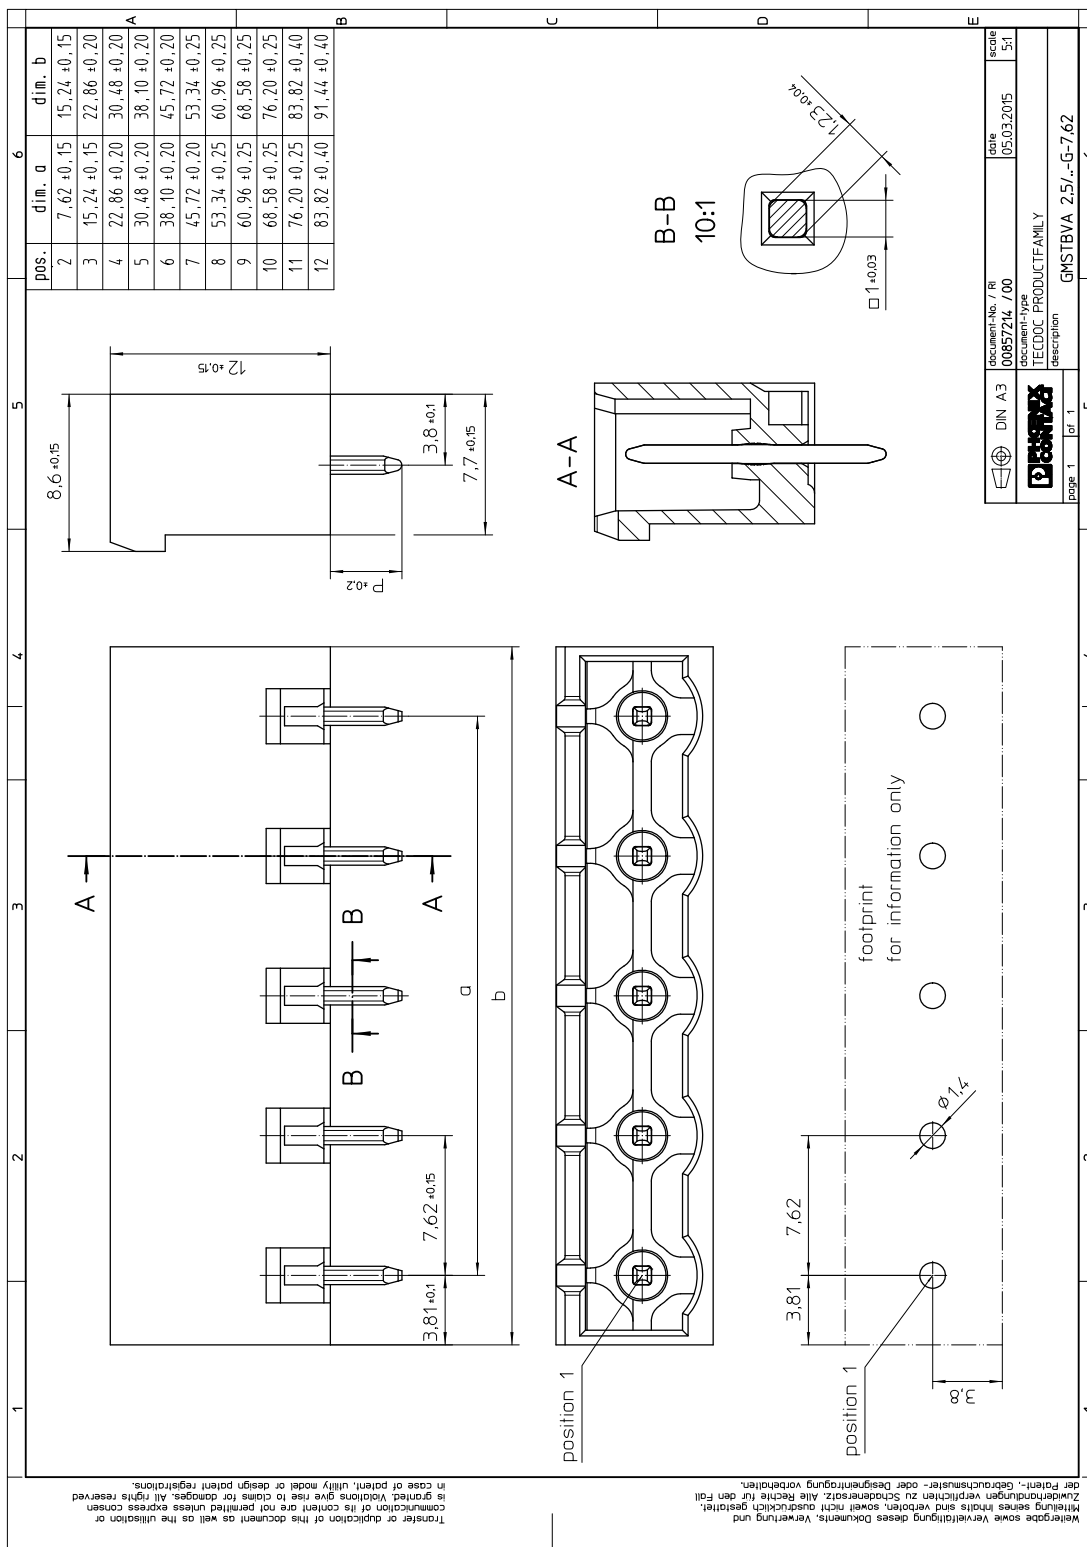

**1766806 GMSTBVA 2,5/ 5-G-7,62****8 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	250

**9 Application****9.1 Temperature limit values**

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

**1766806 GMSTBVA 2,5/ 5-G-7,62****10 Mechanical tests**

Mechanical test group A	
Specification	IEC 61984:2008-10
Visual test	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	8 N
Withdraw strength per pos. approx.	6 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	31 N

**1766806 GMSTBVA 2,5/ 5-G-7,62****11 Electrical tests****11.1 Electrical data**

Rated current / conductor cross section	12 A / 2.5 mm <sup>2</sup>
Rated insulation voltage (III/2)	630 V
Rated surge voltage (III/2)	6 kV
Contact resistance	3.7 mΩ
Degree of pollution	2

**11.2 Air and creepage distances**

Component	Header		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	400 V	630 V	630 V
Rated surge voltage	6 kV	6 kV	6 kV
Degree of pollution	3	2	2
Overtoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	5.5 mm	5.5 mm	5.5 mm
Minimum value of the creepage path requirement in acc. with table	6.3 mm	5.5 mm	5 mm




## 1766806 GMSTBVA 2,5/ 5-G-7,62


## 12 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	0.8
Number of positions	See diagram
Conductor cross section	2.5 mm <sup>2</sup>
Note	

## Type: GMVSTBR 2,5 HV/...-ST-7,62 with GMSTBVA 2,5/...-G-7,62

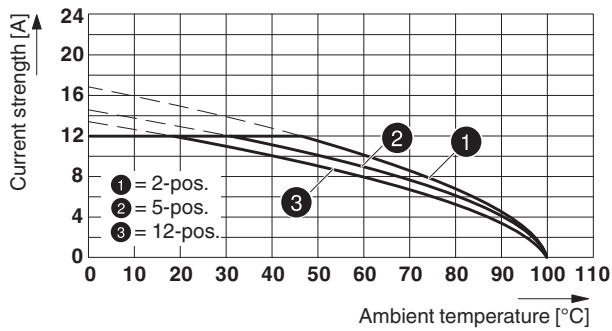

## Type: GMSTB 2,5/..-ST-7,62 with GMSTBVA 2,5/..-G-7,62

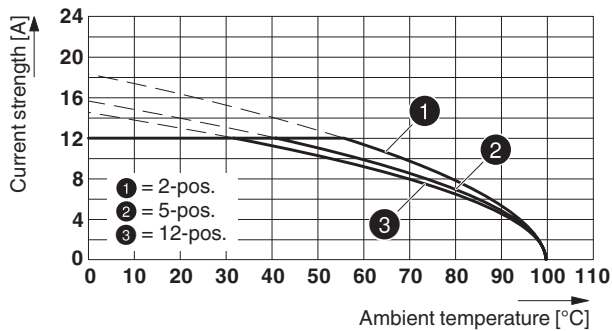

## Type: FRONT-GMSTB 2,5/...-ST-7,62 with GMSTBVA 2,5/...-G-7,62

86108\_1000\_en

## 1766806 GMSTBVA 2,5/ 5-G-7,62

## 13 Environmental and durability tests


### 13.1 Vibration test


Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis


## 14 Classification for connectors


Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Protection against electric shock	Not encapsulated - touch-proof when inserted
Protection class	
Protective conductor	without PE
Lock	no

## 15 Approvals


CSA 				
Use group	B	D		
mm <sup>2</sup> /AWG/kcmil				
Voltage	300 V	300 V		
Current	10 A	10 A		

UL Recognized 				
Use group	B	D		
mm <sup>2</sup> /AWG/kcmil				
Voltage	300 V	300 V		
Current	15 A	10 A		

VDE Gutachten mit Fertigungsüberwachung 				
mm <sup>2</sup> /AWG/kcmil				
Voltage	400 V			
Current	12 A			

cUL Recognized 				
Use group	B	D		
mm <sup>2</sup> /AWG/kcmil				
Voltage	300 V	300 V		
Current	15 A	10 A		

# 1766806 GMSTBVA 2,5/ 5-G-7,62

IECEE CB Scheme 

mm<sup>2</sup>/AWG/kcmil


Voltage

400 V

Current

12 A

EAC 

cULus Recognized 

**1766806 GMSTBVA 2,5/ 5-G-7,62****16 Commercial Data**

Order No.	1766806
Type	GMSTBVA 2,5/ 5-G-7,62
Pieces per package	250
Net weight	2.447 g
GTIN	4017918032821
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

**17 corresponding plugs**

Order No.	Type
1767038	GMSTB 2,5/ 5-ST-7,62
1806148	FRONT-GMSTB 2,5/ 5-ST-7,62
1823095	GMSTBP 2,5/ 5-ST-7,62
1832442	GMVSTBW 2,5/ 5-ST-7,62
1832552	GMVSTBR 2,5/ 5-ST-7,62
1939662	GFKC 2,5/ 5-ST-7,62

**18 Accessories**

Description	Order No.	Type
Coding section, inserted into the recess in the header or the inverted plug, red insulating material	1734401	CR-MSTB
Keying cap, for forming sections, plugs onto header pin, green insulating material	1755477	MSTB-BL
	0804549	SK 7,62/3,8:FORTL.ZAHLEN

## 1766806 GMSTBVA 2,5/ 5-G-7,62

## 19 Combination tests



GMSTBVA 2,5/..-G



GMVSTBR 2,5/..-ST



GMSTB 2,5/..-ST

FRONT-GMSTB  
2,5/..-ST

GFKC 2,5/..-ST

Specification	IEC 61984	IEC 61984	IEC 61984	IEC 61984
<b>Mechanical tests (A)</b>				
Insertion/withdrawal force per position	approx. 8 N / 6 N	approx. 7 N / 3 N	approx. 8 N / 6 N	
Polarization when inserted Requirement >20 N	Test passed	Test passed	Test passed	
Contact holder in insert Requirements >20 N	Test passed	Test passed	Test passed	
<b>Durability tests (B)</b>				
Contact resistance R <sub>1</sub>	3.7 mΩ	2.6 mΩ	2.9 mΩ	
Insertion/withdrawal cycles	25	25	25	
Contact resistance R <sub>2</sub>	3.8 mΩ	2.7 mΩ	2.9 mΩ	
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	7.3 kV	7.3 kV	7.3 kV	
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	3.31 kV	3.31 kV	3.31 kV	
Insulation resistance Requirements > 5 MΩ	> 2 TΩ	0,263 TΩ	0.549 TΩ	
<b>Thermal tests (C)</b>				
Tested number of positions	12	12	12	
Tested conductor cross section	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	
Test current	12 A	12 A DC	12 A DC	
Upper limiting temperature Requirements < 100°C	Test passed	Test passed	Test passed	
<b>Climatic tests (D)</b>				
Test sequence 1: low temperature storage	-40 °C/2 h	-40 °C/2 h	-40 °C/2 h	
Test sequence 2: heat storage	100 °C/168 h	100 °C/168 h	100 °C/168 h	
Test sequence 3: noxious gas storage (ISO 6988)	0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> / 40 °C/1 cycle	0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> / 40 °C/1 cycle	0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> / 40 °C/1 cycle	
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	7.3 kV	7.3 kV	7.3 kV	
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	3.31 kV	3.31 kV	3.31 kV	
<b>Environmental and endurance tests (E)</b>				
Specification	IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10	
Degree of protection	Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger	

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)