


# FRONT-SFL 2,5/F48

Order No.: 2285603



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2285603>

Screw socket, Nominal current: 4 A, Number of positions: 48, Pitch: 0 mm, Color: green

Commercial data	
GTIN (EAN)	 4 017918 056001
sales group	E311
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 535 (CC-2009)

### Product notes

WEEE/RoHS-compliant since:  
11/26/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

Dimensions / positions	
Length	45.32 mm
Height	35.3 mm
Width	95 mm
Pitch	0 mm
Number of positions	48

Hole diameter	2.8 mm
Screw thread	M2,5
Tightening torque, min	0.4 Nm
Tightening torque max	0.5 Nm

#### Technical data

Range of articles	FRONT-SFL 2,5
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	4 A
Nominal voltage $U_N$	250 V
Insulating material	PA
Inflammability class acc. to UL 94	V2
Stripping length	10 mm

#### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

#### Certificates / Approvals




Certification

CUL, GOST, UL

## Diagrams/Drawings

### Dimensioned drawing

---

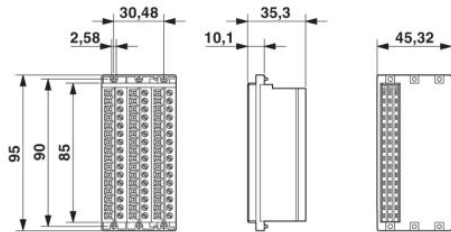

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)