

Sealing frame - CES-B10-HFFS-PLBK - 0801663

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sealing frame with locking latch, size B10, with flat gasket, for 6 small sleeves

Product Description

Including flat gasket; mounting screws not supplied as standard



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 120.0 g |
| Custom tariff number | 85472000 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|--------|---------|
| Length | 99.2 mm |
| Width | 58.5 mm |
| Height | 20 mm |

Ambient conditions

| | |
|---------------------------------|-------------------|
| Degree of protection | IP44 |
| Ambient temperature (operation) | -40 °C ... 120 °C |

General

| | |
|--|---|
| Product description | Including flat gasket; mounting screws not supplied as standard |
| Frame type | Sealing frame |
| Material | PA |
| | Polyamide (Frame) |
| Flammability rating according to UL 94 | V0 |
| Color | black |

Sealing frame - CES-B10-HFFS-PLBK - 0801663

Technical data

General

| | |
|---------------------------|---|
| Torque | 1.8 Nm (Mounting screw, M4 (ISO 4762/DIN 912)) |
| Installation instructions | One large sleeve requires the space of 4 small sleeves, M4 mounting screws (ISO 4762/DIN 912), torque for mounting screw: 1.8 Nm |
| | A video tutorial on how to assemble the product can be found in the Downloads area, in the Video category. |
| | Leak-tightness is guaranteed with underwall and perpendicular mounting; the flat gasket should be inserted between the wall and the sealing frame in the case of wall mounting. |

Standards and Regulations

| | |
|--|-----|
| Connection in acc. with standard | CUL |
| Flammability rating according to UL 94 | V0 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 23110102 |
| eCl@ss 4.1 | 23110102 |
| eCl@ss 5.0 | 23110102 |
| eCl@ss 5.1 | 23110102 |
| eCl@ss 6.0 | 23110102 |
| eCl@ss 7.0 | 23110102 |
| eCl@ss 8.0 | 27142421 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002498 |
| ETIM 5.0 | EC000211 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 27113201 |
| UNSPSC 7.0901 | 27113201 |
| UNSPSC 11 | 27113201 |
| UNSPSC 12.01 | 27113201 |
| UNSPSC 13.2 | 27113201 |

Approvals

Approvals

Sealing frame - CES-B10-HFFS-PLBK - 0801663

Approvals

Approvals

UL Recognized / cUL Recognized / GL / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized


cUL Recognized

GL

cULus Recognized


Drawings

Dimensional drawing

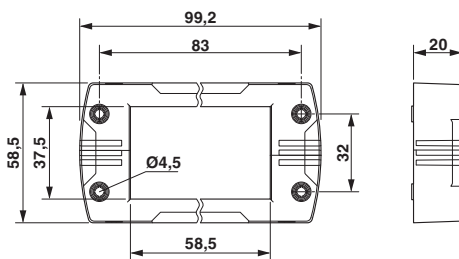

Dimensional drawing

Dimensional drawing



Panel cutout

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact \(菲尼克斯\)](#)