

Housing - HC-EVO-D15-CHWS-PL-BK - 1411338

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON EVO coupling housing, plastic, with bayonet flange for EVO screw connection, D15, with single locking latch, without EVO screw connection

Product Features

- Flexible cable outlet direction, lateral or straight
- Lower costs than metal version
- Labeling option using 9 x 20 mm marking label
- Low weight
- Lower risk of condensation
- Both contact insert PE sheets are connected by means of a metal frame integrated in the sleeve housing
- Metal inlays ensure leading PE contact with angled plugs
- Completely corrosion-resistant
- Halogen-free plastic
- Impact test according to IK 08



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 60.0 g |
| Custom tariff number | 85389099 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|--------|---------|
| Height | 60 mm |
| Width | 30 mm |
| Length | 63.5 mm |

Ambient conditions

Housing - HC-EVO-D15-CHWS-PL-BK - 1411338

Technical data

Ambient conditions

| | |
|--|-----------------------|
| Degree of protection of housing (IP) | IP66 |
| Degree of protection of housing (NEMA) | 4 (UL50e / NEMA 250) |
| | 4X (UL50e / NEMA 250) |
| | 12 (UL50e / NEMA 250) |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|--|---|
| Note | For contact inserts HC-D15, A10 |
| Size | D15 |
| Housing type | Coupling housings |
| Color | black |
| Locking type | With single locking latch |
| No. of cable outlets | 1 |
| Cable exit | straight |
| | Lateral |
| Screw connection | none |
| Housing material | Polyamide |
| Material lock | Polyamide |
| Flammability rating according to UL 94 | V0 |
| Connection | The coupling housing must be supplemented with the EVO screw connection. The EVO screw connection is available in 4 sizes. The EVO screw connection is assembled by hand or using a pipe wrench, for example. |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 8.0 | 27440202 |
| eCl@ss 9.0 | 27440202 |

ETIM

| | |
|----------|----------|
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

Housing - HC-EVO-D15-CHWS-PL-BK - 1411338

Approvals

Approvals

Approvals

EAC / GL

Ex Approvals

Approvals submitted


Approval details

EAC

GL

Drawings

Dimensional drawing

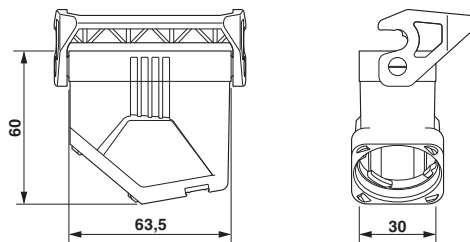

Dimensional drawing

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)