

Electronic housing - ME 22,5 UT/FE LBGY - 2909840

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Lower part of housing, fully assembled, with integrated functional earth ground contact, and metal foot catch.

Illustration shows fully mounted versions of the electronic housing, in green

Product Features

- ✓ Tool-free mounting
- ✓ Low design width with a high number of positions
- ✓ Large assembly area
- ✓ Same PCB geometry for all design widths
- ✓ Recessed labeling areas
- ✓ Fast mounting on DIN rails according to EN 60715
- ✓ Inflammability class V0 according to UL 94
- ✓ Material and part identification embossed on the housing (recyclability)
- ✓ Cost savings thanks to easy device production
- ✓ Electronic components can be partially removed
- ✓ Metal foot catch
- ✓ Functional earth ground contact (EMC) integrated in the housing base
- ✓ Optional BUS connection integrated in the housing, for either parallel or serial contacting



Key commercial data

Packing unit	1 1
Minimum order quantity	100 1
Weight per Piece (excluding packing)	38.71 GRM
Custom tariff number	85472000
Country of origin	Germany

Electronic housing - ME 22,5 UT/FE LBGY - 2909840

Classifications

eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702

ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

Electronic housing - ME 22,5 UT/FE LBGY - 2909840

Approvals

UL Recognized 	
mm²/AWG/kcmil	30-12
Nominal current I _N	10 A
Nominal voltage U _N	300 V

cUL Recognized 	
mm²/AWG/kcmil	30-12
Nominal current I _N	10 A
Nominal voltage U _N	300 V

cULus Recognized 	
--	--

Accessories

Accessories

Coding element

Coding star - CR-MSTB - 1734401



Coding section, inserted into the recess in the header or the inverted plug, red insulating material

Coding profile - CP-MSTB - 1734634



Coding profile, is inserted into the slot on the plug or inverted header, red insulating material

Electronic housing - ME 22,5 UT/FE LBGY - 2909840

Accessories

Component housing center part

Electronic housing - ME 45 UTM GN - 2853404



Intermediate element for modular extension of the volume of the housing in the pitch. The open intermediate element is 22.5 mm wide.

Electronic housing - ME 45 UTM G GN - 2853417



Intermediate element for modular extension of the volume of the housing in the pitch. The closed intermediate element is 22.5 mm wide.

Electronic housing - ME 45 UTM GN - 2853404



Intermediate element for modular extension of the volume of the housing in the pitch. The open intermediate element is 22.5 mm wide.

Filler plug

Electronic housing - ME B-22,5 MKDSO GN - 2907143



Filler plugs, for unoccupied terminal points

Ground contact

Electronic housing - ME 22,5 UT/FE LBGY - 2909840

Accessories

Electronic housing - ME FE-CONTACT - 2908294



Functional earth ground contact, for intermediate elements.

Electronic housing - ME FE-CONTACT - 2908294



Functional earth ground contact, for intermediate elements.

Mounting material

Components of electronic housing - ME-SAS - 2853899



Shield connection clamp for printed circuit terminal block

Electronic housing - ME LPZS - 2906911



PCB stop, for soldering onto PCB

Electronic housing - ME MF 17,5 - 2908281



Metal foot catch, for intermediate elements.

Electronic housing - ME 22,5 UT/FE LBGY - 2909840

Accessories

Electronic housing - ME LPZS - 2906911



PCB stop, for soldering onto PCB


Electronic housing - ME MF 17,5 - 2908281



Metal foot catch, for intermediate elements.

PCB

Electronic housing - ME LP - 2906908



PCB, for custom fitting, with contact to DIN rail (EN 60715)

Electronic housing - ME B-22,5 MSTBO BEIGE - 2909950

Filler plugs, for unoccupied terminal points

Required add-on products

Electronic housing - ME 22,5 OT-MSTBO SET - 2907444



Housing upper part, complete with 4 pairs of COMBICON headers and plugs

Electronic housing - ME 22,5 UT/FE LBGY - 2909840

Accessories

Electronic housing - ME 22,5 OT-MSTBO GN - 2907169



Upper part of housing, for COMBICON connection, double-level

Electronic housing - ME 22,5 OT-1MSTBO GN - 2709558



Upper part of housing, for COMBICON connection, single-level

Electronic housing - ME 22,5 OT-MKDSO SET - 2907473



Housing upper part, complete with PCB termination blocks for full equipping. 16-pos., housing width: 22.5 mm

Electronic housing - ME 22,5 OT-MKDSO GN - 2907172




Housing upper part, for printed circuit terminal block connection

Drawings


Electronic housing - ME 22,5 UT/FE LBGY - 2909840

Dimensioned drawing

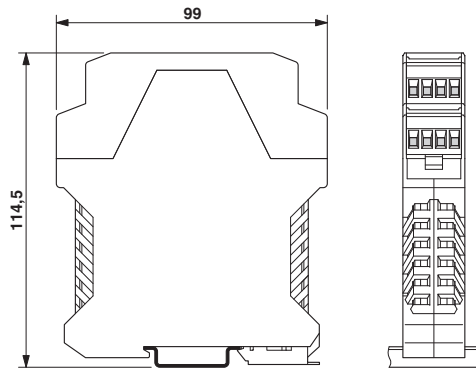


Dimensions of the electronic housing ME... with double-level upper part

Dimensioned drawing

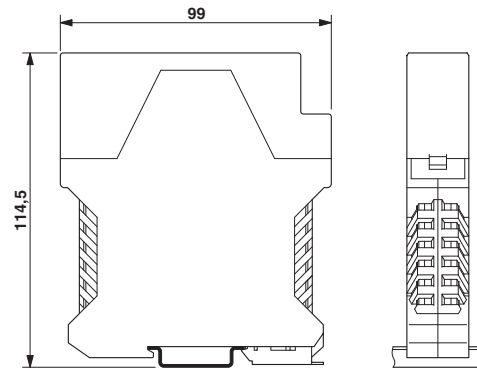


Dimensions of the electronic housing ME... with single-level upper part

Dimensioned drawing

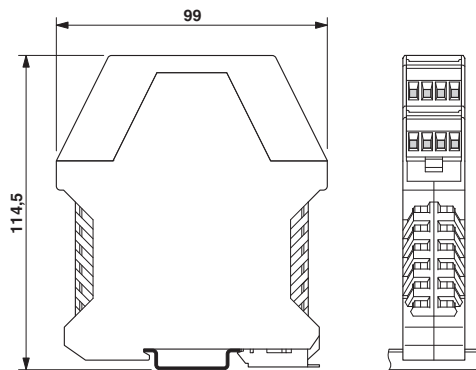


Dimensions of the electronic housing ME... with double-level upper part

Dimensioned drawing

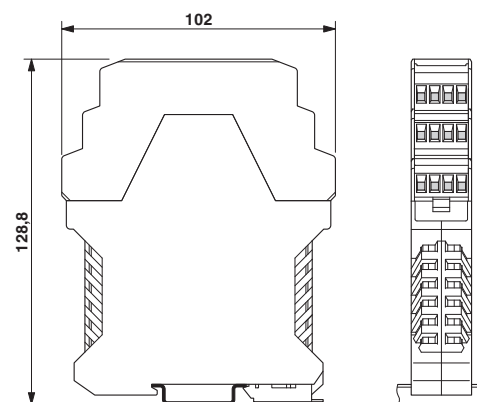

Dimensional drawing of the ME... printed circuit board if the triple-level upper part is used


Dimensioned drawing



Inner housing dimensions, electronic housing ME 22.5 ...


Electronic housing - ME 22,5 UT/FE LBGY - 2909840

Dimensioned drawing

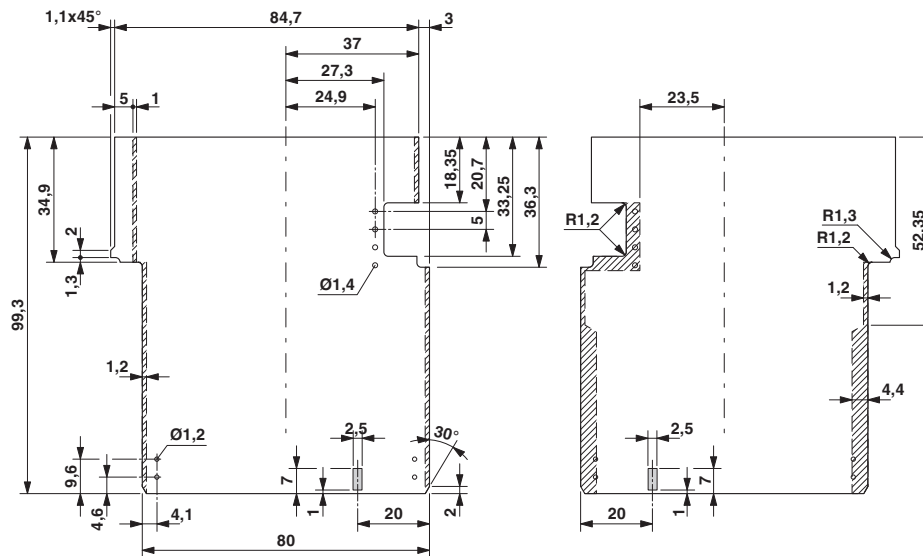

Dimensional drawing of the ME... printed circuit board if the single level upper part is used

Dimensioned drawing

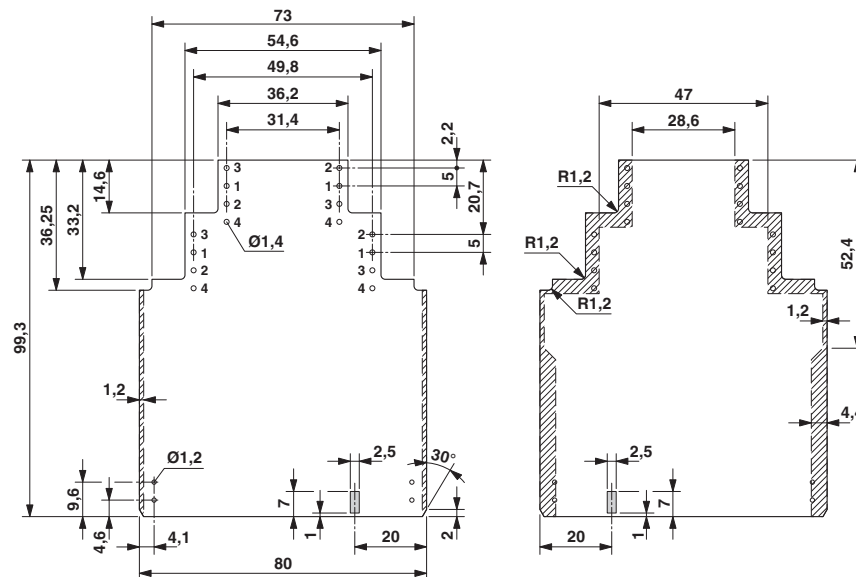

Dimensional drawing of the ME... printed circuit board if the double level upper part is used

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)