


**VS-PPC-F1-RJ45-P0BK-1R-PHA**

Order No.: 1657847

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1657847>

RJ45 panel mounting frame, IP67, for push-pull interlocking, plastic, for PCB connection, for square panel cutout, with grommet, without mounting screws



Commercial data	
GTIN (EAN)	 4 046356 131919
sales group	D510
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 195 (PC-2009)

## Product notes

WEEE/RoHS-compliant since:  
01/01/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

## Mechanical characteristics

Insertion/withdrawal cycles	≥ 500
Color	black
Ambient temperature (operation)	-40 °C ... 70 °C

**Material data**

Inflammability class acc. to UL 94	V0
Housing material	PA-GF
Material	Plastic
Sealing material	NBR
Seal material	NBR
Degree of protection	IP65/67

**Electrical characteristics**

Pollution degree	2
------------------	---

**Accessories**

Item	Designation	Description
------	-------------	-------------


**Female insert**

1653087	VS-08-BU-RJ45-6/LH-1	RJ45 socket insert, for PCB assembly, CAT6, 8-pos., shielded, with angled solder pins, 1x
1653090	VS-08-BU-RJ45-6/LV-1	RJ45 socket insert, for PCB assembly, CAT6, 8-pos., shielded, with straight solder pins, 1x


**Diagrams/Drawings**

Drilling plan/solder pad geometry


Drilling diagram

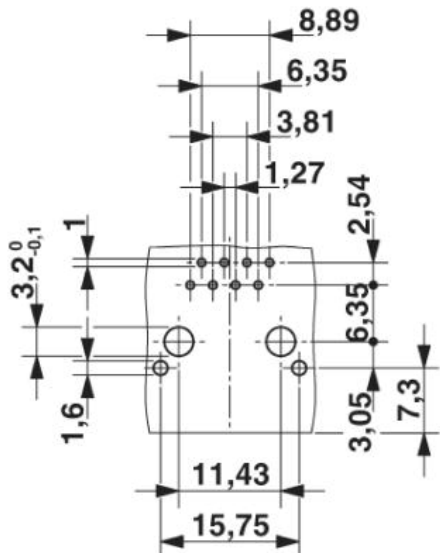

Dimensioned drawing

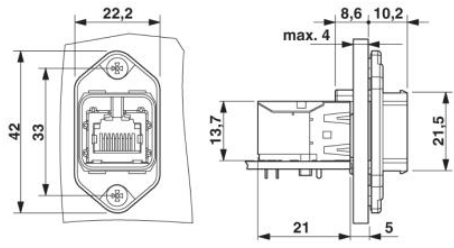

Push-Pull panel mounting frame RJ45

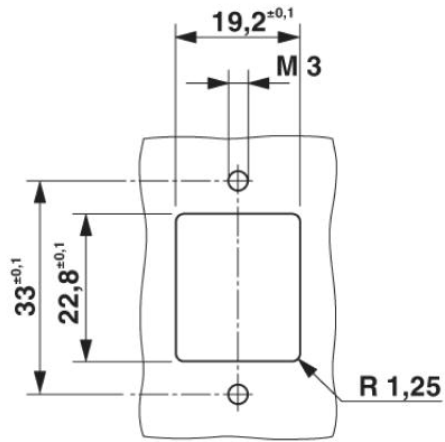

Panel cutout

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)