

## Power supply unit - QUINT-PS/2AC/1DC/24DC/20 - 2320830

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Primary-switched DIN rail power supply unit. AC input: suitable for operation between two phases (400 V AC). DC input: suitable for operation in an FI intermediate circuit. Output: 24 V DC/20 A.

### Product description

QUINT POWER power supply units – Superior system availability with SFB technology

Compact power supply units of the new QUINT POWER generation maximize the availability of your system. With the SFB technology (Selective Fuse Breaking Technology), six times the nominal current for 12 ms, even the standard power circuit-breakers can now also be triggered reliably and quickly. Faulty current paths are switched off selectively, the fault is located and important system parts continue to operate. Comprehensive diagnostics are provided through constant monitoring of output voltage and current. This preventive function monitoring visualizes critical operating modes and reports them to the control unit before an error can occur.



### Key commercial data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 pc     |
| Custom tariff number | 85044030 |
| Country of origin    | China    |

### Technical data

#### Note

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---------------------------------------------------------------------------|

#### Dimensions

|        |        |
|--------|--------|
| Width  | 120 mm |
| Height | 130 mm |
| Depth  | 125 mm |

#### Ambient conditions

|                                         |                                              |
|-----------------------------------------|----------------------------------------------|
| Degree of protection                    | IP20                                         |
| Ambient temperature (operation)         | -25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C                             |

# Power supply unit - QUINT-PS/2AC/1DC/24DC/20 - 2320830

## Technical data

### Ambient conditions

|                                                |                                   |
|------------------------------------------------|-----------------------------------|
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing) |
| Maximum altitude                               | ≤ 2000 m                          |

### Input data

|                              |                                     |
|------------------------------|-------------------------------------|
| Nominal input voltage range  | 2x 400 V AC ... 500 V AC            |
|                              | 600 V DC                            |
| Input voltage range          | 2x 360 V AC ... 575 V AC            |
|                              | 450 V DC ... 840 V DC               |
| AC frequency range           | 45 Hz ... 65 Hz                     |
| Inrush surge current         | < 85 A (typical)                    |
| Power failure bypass         | > 20 ms (400 V AC)                  |
| Input fuse                   | 3.15 A (slow-blow, internal)        |
| Choice of suitable fuses     | 10 A ... 16 A (Characteristic B, C) |
| Type of protection           | Transient surge protection          |
| Protective circuit/component | Varistor                            |

### Output data

|                                      |                                                            |
|--------------------------------------|------------------------------------------------------------|
| Nominal output voltage               | 24 V DC ±1 %                                               |
| Setting range of the output voltage  | 18 V DC ... 29.5 V DC ( $U_{IN} \geq 360$ V AC / 480 V DC) |
|                                      | 18 V DC ... 26 V DC (< 480 V DC)                           |
| Nominal output current               | 20 A (-25 °C ... 60 °C)                                    |
| POWER BOOST                          | 26 A (-25 °C ... 40 °C permanent, $U_{OUT} = 24$ V DC )    |
| SFB technology current reserve       | 120 A (20 ms)                                              |
| Derating                             | 60 °C ... 70 °C (2.5%/K)                                   |
| Connection in parallel               | Yes, for redundancy and increased capacity                 |
| Connection in series                 | Yes                                                        |
| Max. capacitive load                 | Unlimited                                                  |
| Active current limitation            | Approx. 27 A                                               |
| Control deviation                    | < 1 % (change in load, static 10 % ... 90 %)               |
|                                      | < 2 % (change in load, dynamic 10 % ... 90 %)              |
|                                      | < 0.1 % (change in input voltage ±10 %)                    |
| Residual ripple                      | < 50 mV <sub>PP</sub> (with nominal values)                |
| Output current                       | 20 A (-25 °C ... 60 °C)                                    |
| Output power                         | 480 W                                                      |
| Peak switching voltages nominal load | < 50 mV <sub>PP</sub> (20 MHz)                             |
| Maximum power dissipation NO-Load    | 11 W                                                       |
| Power loss nominal load max.         | 51 W                                                       |

### General

# Power supply unit - QUINT-PS/2AC/1DC/24DC/20 - 2320830

## Technical data

### General

|                                                                                                                                  |                                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Net weight                                                                                                                       | 2 kg                                                                            |
| Efficiency                                                                                                                       | > 92 % (600 V DC)                                                               |
|                                                                                                                                  | > 90.5 % (400 V AC)                                                             |
| Insulation voltage input/output                                                                                                  | 1.5 kV AC (type test)                                                           |
|                                                                                                                                  | 2 kV AC (routine test)                                                          |
| Protection class                                                                                                                 | I                                                                               |
|                                                                                                                                  | > 860000 h (40°C)                                                               |
| Mounting position                                                                                                                | horizontal DIN rail NS 35, EN 60715                                             |
| Assembly instructions                                                                                                            | Alignable: 5 mm horizontally, 15 mm next to active components, 50 mm vertically |
| Electromagnetic compatibility                                                                                                    | Conformance with EMC Directive 2004/108/EC                                      |
| Standard - Safety of transformers                                                                                                | EN 61558-2-17                                                                   |
| Standard - Electrical safety                                                                                                     | EN 60950-1/VDE 0805 (SELV)                                                      |
|                                                                                                                                  | EN 61558-2-17                                                                   |
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV)                                                        |
| Standard - Safe isolation                                                                                                        | DIN VDE 0100-410                                                                |
| Rail applications                                                                                                                | EN 50121-4                                                                      |
| UL approvals                                                                                                                     | UL/C-UL listed UL 508                                                           |
|                                                                                                                                  | UL/C-UL Recognized UL 60950-1                                                   |

### Connection data, input

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Screw connection    |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 6 mm <sup>2</sup>   |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 4 mm <sup>2</sup>   |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 10                  |
| Stripping length                      | 8 mm                |
| Screw thread                          | M3                  |

### Connection data, output

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Screw connection    |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 6 mm <sup>2</sup>   |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 4 mm <sup>2</sup>   |
| Conductor cross section AWG min.      | 12                  |

# Power supply unit - QUINT-PS/2AC/1DC/24DC/20 - 2320830

## Technical data

### Connection data, output

|                                  |      |
|----------------------------------|------|
| Conductor cross section AWG max. | 10   |
| Stripping length                 | 8 mm |
| Screw thread                     | M3   |

### Signaling

|                                       |                                                               |
|---------------------------------------|---------------------------------------------------------------|
| Output name                           | DC OK floating                                                |
| Output description                    | $U_{OUT} > 0.9 \times U_N$ : Relays closed                    |
| Maximum inrush current                | $\leq 100$ mA (short-circuit resistant)                       |
| Status display                        | "DC OK" LED green                                             |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup>                                           |
| Conductor cross section solid max.    | 6 mm <sup>2</sup>                                             |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup>                                           |
| Conductor cross section flexible max. | 4 mm <sup>2</sup>                                             |
| Conductor cross section AWG min.      | 24                                                            |
| Conductor cross section AWG max.      | 10                                                            |
| Tightening torque, min                | 0.5 Nm                                                        |
| Tightening torque max                 | 0.6 Nm                                                        |
| Screw thread                          | M3                                                            |
| Output name                           | POWER BOOST, active                                           |
| Output description                    | $I_{OUT} < I_N$ : High signal                                 |
| Maximum inrush current                | $< 20$ mA (short-circuit resistant)                           |
| Status display                        | "BOOST" LED yellow/ $I_{OUT} > I_N$ : LED on                  |
| Output name                           | DC <sub>IN</sub> OK, active                                   |
| Output description                    | $U_{IN} > 450$ V DC: high signal                              |
| Maximum inrush current                | $< 20$ mA (short-circuit resistant)                           |
| Status display                        | LED "DC <sub>IN</sub> OK" green / $U_{IN} > 450$ V DC: LED on |

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27040702 |
| eCl@ss 4.1 | 27040702 |
| eCl@ss 5.0 | 27049002 |
| eCl@ss 5.1 | 27049002 |
| eCl@ss 6.0 | 27049002 |
| eCl@ss 7.0 | 27049002 |
| eCl@ss 8.0 | 27049002 |

# Power supply unit - QUINT-PS/2AC/1DC/24DC/20 - 2320830

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001039 |
| ETIM 4.0 | EC002540 |
| ETIM 5.0 | EC002540 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211502 |
| UNSPSC 7.0901 | 39121004 |
| UNSPSC 11     | 39121004 |
| UNSPSC 12.01  | 39121004 |
| UNSPSC 13.2   | 39121004 |

## Approvals

### Approvals

### Approvals

UL Recognized / UL Listed / cUL Recognized / cUL Listed / EAC / cULus Recognized / cULus Listed

### Ex Approvals

### Approvals submitted

### Approval details

UL Recognized 

UL Listed 

cUL Recognized 

## Power supply unit - QUINT-PS/2AC/1DC/24DC/20 - 2320830

### Approvals

cUL Listed 


EAC

cULus Recognized 

cULus Listed 

### Drawings

Block diagram

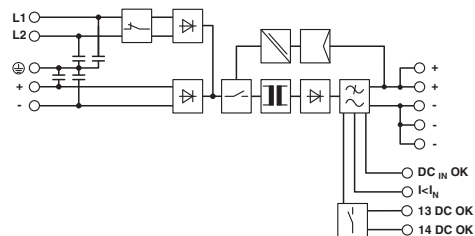

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)