


The copying, distribution and utilisation of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved, in particular the right to carry out patent, utility model or ornamental design registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Recht, Patent-, Gebrauchsmuster- oder Geschmacksmusteranmeldungen durchzuführen. CONINVERS GmbH Heisenbergstrasse 1 D-71083 Herrenberg

Mechanical data (according to IEC 61076-2-101)		Material	
no. of poles / coding	8 / A (with shield connection)	contacts / surface	CuZn with gold layer
contact termination	dip solder / pin	contact carrier colour	PA6T / 66 black
contact-Ø	8xØ0,8mm	sealing gasket	FKM
temperature range	-40 °C to +105 °C		
protection class	IP67		
mating cycles	>100		


further information:
- see technical data M12-3

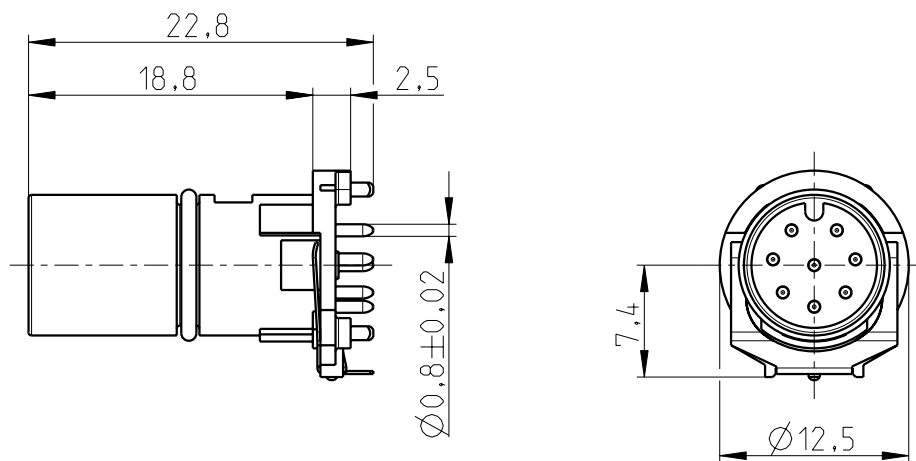

All specified data refers to the mounted M12 installation plugs ≥ IP54 and requires that the connector pair be correctly plugged and locked. Influences from wires, cables or PCB mounting are also to be taken into consideration.

drilling plan

component side (front view PC-Board)

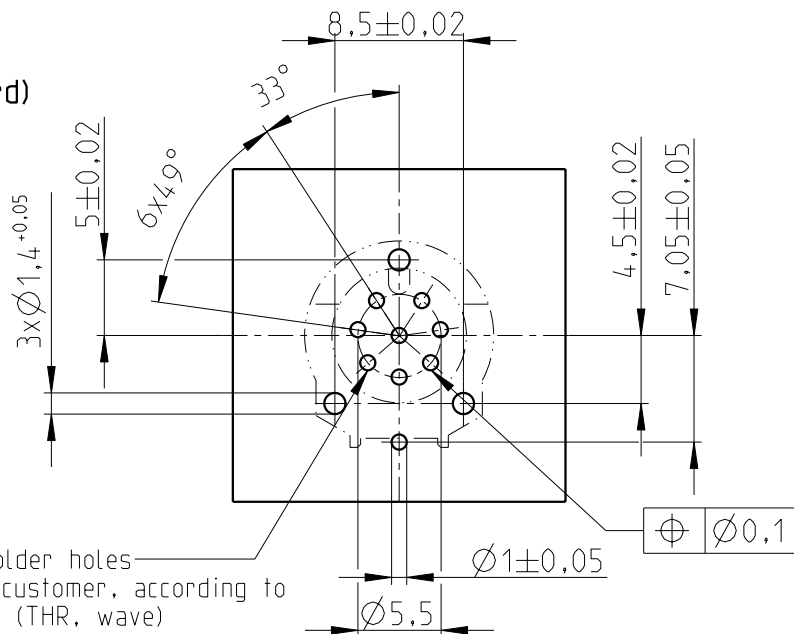

general tolerance acc. to DIN ISO 2768-c			technical changes reserved		Index 1 / 2012-06-21		scale: 2:1		
	date	name	Series DSIV M12-pin-contact carrier 8-pole pin/A-coding/straight/shield connection					page: 1 of: 1	
design	2012-06-20	Scheerer							
chk.									
			drawing-no.:	BS-08P2NC200B4		doc.-no.:	00668470		
			order-no.:	1557581					
			article designation:	SACC-CI-M12MS-8CON-L180-THR SH					

page: 1
of: 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)