

Plug-in module - V3- 12- 24UC - 2833929

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid
(<http://download.phoenixcontact.com>)

Plug-in module, for mounting on PR3, with varistor, input voltage: 12-24 V AC/DC $\pm$ 20%



Product Features

- ☒ Mechanical coding to protect against mismatching
- ☒ Attenuation of reverse voltage induced in coil



Key commercial data

Packing unit	1 pc
Minimum order quantity	10 pc
Weight per Piece (excluding packing)	6.92 GRM
Custom tariff number	85366990
Country of origin	Italy

Technical data

Product type	Plug-in module
Approval	UL Recognized
	cUL Recognized
	cULus Recognized
Design	PR3
Input voltage	12 V AC/DC ... 24 V AC/DC

Classifications

eCl@ss

eCl@ss 4.0	27371190
eCl@ss 4.1	27371190

Plug-in module - V3- 12- 24UC - 2833929

Classifications

eCl@ss

eCl@ss 5.0	27371692
eCl@ss 5.1	27371692
eCl@ss 6.0	27371603
eCl@ss 7.0	27371603
eCl@ss 8.0	27371603

ETIM

ETIM 2.0	EC001456
ETIM 3.0	EC001456
ETIM 4.0	EC001456
ETIM 5.0	EC001456

UNSPSC

UNSPSC 6.01	30211917
UNSPSC 7.0901	39121516
UNSPSC 11	39121516
UNSPSC 12.01	39121516
UNSPSC 13.2	39121516

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized 

Plug-in module - V3- 12- 24UC - 2833929


Approvals



Drawings

Plug-in module - V3- 12- 24UC - 2833929

Circuit diagram

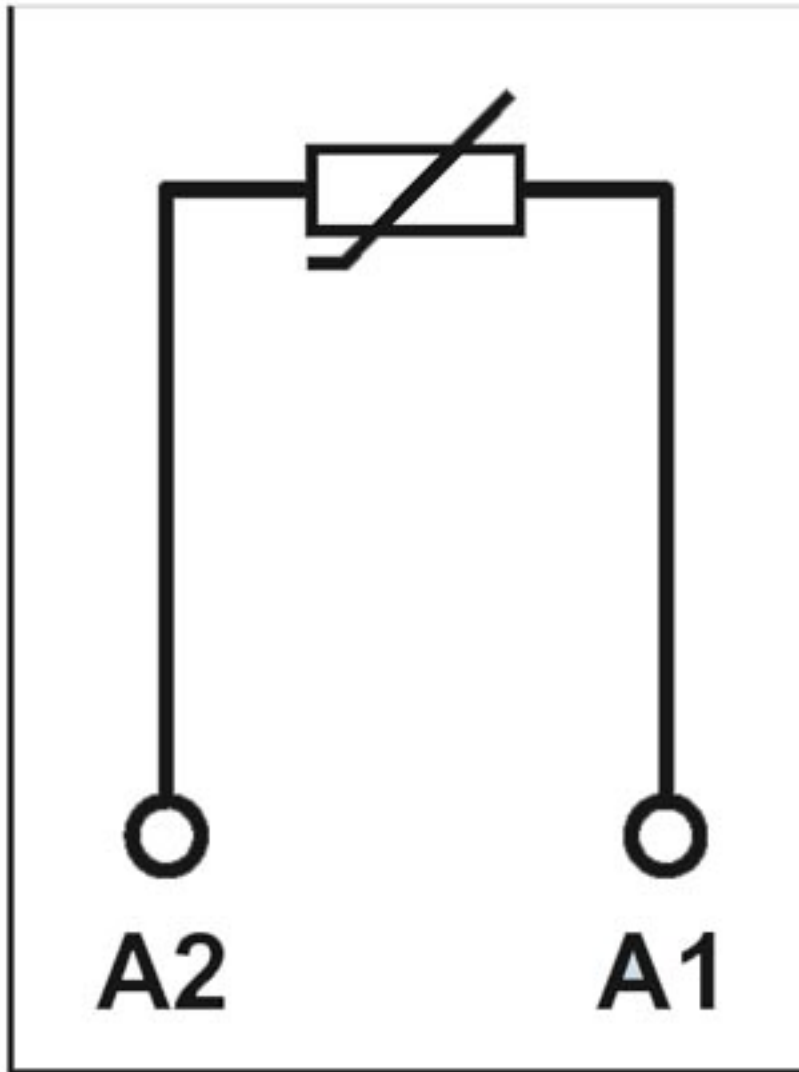

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)