

# Bus system cable - SAC-5P-MR/ 5,0-923/FR CAN SCO - 1419077

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Bus system cable, CANopen®, 5-position, PUR halogen-free, Gray RAL 7001, shielded, Plug angled M12-SPEEDCON, A-coded, on Socket angled M12-SPEEDCON, A-coded, Cable length: 5 m



## Key commercial data

|                        |   |
|------------------------|---|
| Packing unit           | 0   |
| Minimum order quantity | 1   |
| Catalog page           | Page 395 (PC-2011)  |
| GTIN                   | <br>4 046356 543385 |
| Custom tariff number   | 85444290  |
| Country of origin      | GERMANY   |

## Technical data

### General data

|                       |      |
|-----------------------|------|
| Rated current at 40°C | 4 A  |
| Rated voltage         | 60 V |
| Number of positions   | 5    |
| Length of cable       | 5 m  |

### General characteristics

|                          |   |
|--------------------------|---|
| Coding                   | A - standard                                |
| Surge voltage category   | II  |
| Pollution degree         | 3   |
| Degree of protection     | IP65/IP67/IP69K                             |
| Contact material         | CuSn  |
| Contact surface material | Ni/Au                                       |
| Contact carrier material | TPU GF                                      |
| Material of grip body    | TPU, hardly inflammable, self-extinguishing |
| Material, knurls         | Zinc die-cast, nickel-plated                |
| Sealing material         | NBR   |
| Status display           | No  |

# Bus system cable - SAC-5P-MR/ 5,0-923/FR CAN SCO - 1419077

## Technical data

### Conductor data

|   |   |
|---|---|
| Cable type                                    | CAN Bus/DeviceNet                                     |
| Cable type (abbreviation)                     | 923   |
| Conductor cross section                       | 2x 0.2 mm <sup>2</sup> (signal line)                  |
| Conductor cross section                       | 2x 0.32 mm <sup>2</sup> (Power supply)                |
| Conductor cross section                       | 1x 0.32 mm <sup>2</sup> (Drain wire)                  |
| AWG signal line                               | 24  |
| AWG power supply                              | 22  |
| Conductor structure signal line               | 19x 0.12 mm   |
| Conductor structure, voltage supply           | 19x 0.15 mm   |
| Core diameter including insulation            | 2.05 mm ±0.1 mm (signal line)                         |
| Core diameter including insulation            | 1.4 mm ±0.05 mm (Power supply)                        |
| Wire colors                                   | Red-black, blue-white                                 |
| Twisted pairs                                 | 2 cores to the pair                                   |
| Type of pair shielding                        | Aluminum-lined polyester foil                         |
| Overall twist                                 | 2 pairs around a drain wire in the center to the core |
| Shielding                                     | Tinned copper braided shield                          |
| Optical shield covering                       | 70 %  |
| External sheath, color                        | Gray RAL 7001   |
| External cable diameter                       | 6.70 mm   |
| Smallest bending radius, fixed installation   | 67 mm   |
| Smallest bending radius, movable installation | 67 mm   |
| Number of bending cycles                      | 5000000   |
| Bending radius                                | 67 mm   |
| Traversing path                               | 10 m  |
| Traversing rate                               | 3 m/s   |
| Acceleration                                  | 7 m/s <sup>2</sup>                                    |
| Outer sheath, material                        | PUR   |
| Material conductor insulation                 | PE (Power supply)                                     |
| Material conductor insulation                 | Foamed PE (signal line)                               |
| Conductor material                            | Tin-plated Cu litz wires                              |
| Insulation resistance                         | ≥ 5 GΩ*km (signal line)                               |
| Insulation resistance                         | ≥ 100 MΩ*km (Power supply)                            |
| Conductor resistance                          | ≤ 78.4 Ω/km (signal line)                             |
| Conductor resistance                          | ≥ 51.6 Ω/km (Power supply)                            |
| Working capacitance                           | 39.3 pF (Signal line, Core-Core)                      |
| Working capacitance                           | 78.7 pF (Signal line, Core-Shield)                    |
| Nominal voltage, conductor                    | 30 V (signal line)                                    |
| Nominal voltage, conductor                    | 300 V (Power supply)                                  |
| Test voltage, conductor                       | 1500 V (signal line)                                  |
| Test voltage, conductor                       | 2000 V (Power supply)                                 |
| Halogen-free                                  | complying with IEC 60754-1/2                          |
| Ambient temperature (operation)               | -40 °C ... 80 °C (cable, fixed installation)          |

# Bus system cable - SAC-5P-MR/ 5,0-923/FR CAN SCO - 1419077

## Technical data

### Conductor data

|                                 |   |
|---------------------------------|---|
| Ambient temperature (operation) | -20 °C ... 75 °C (cable, flexible installation) |
|---------------------------------|---|

## Classifications

### eclass

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060307 |
| eCl@ss 4.1 | 27060307 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27060307 |
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |

### etim

|          |          |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC000830 |
| ETIM 4.0 | EC001855 |

### unspsc

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 26121616 |
| UNSPSC 7.0901 | 26121616 |
| UNSPSC 11     | 26121604 |
| UNSPSC 12.01  | 26121616 |
| UNSPSC 13.2   | 26121616 |

## Approvals

### Approvals

Approvals

GOST

Ex Approvals

Approvals submitted


### Approval details

|  |
|--|
| GOST  |
|--|

# Bus system cable - SAC-5P-MR/ 5,0-923/FR CAN SCO - 1419077


## Drawings

Schematic diagram




Pin assignment M12 male connector, 5-pos., A-coded, male side

Schematic diagram




Pin assignment M12 socket, 5-pos., A-coded, socket side view

Dimensioned drawing

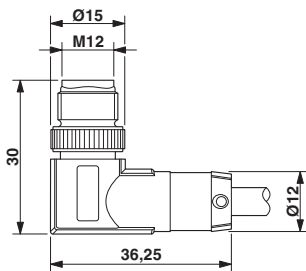


M12 x 1 male connector, angled

Dimensioned drawing

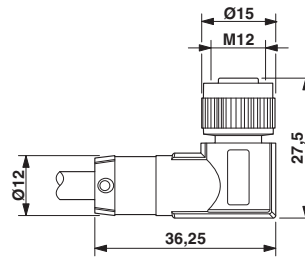

M12 x 1 female connector, angled

Circuit diagram

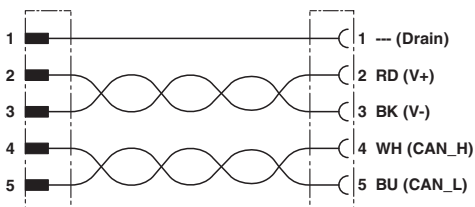

Contact assignment of the M12 plug and the M12 socket

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact \(菲尼克斯\)](#)