

## Printed-circuit board connector - PTF 0,3/ 4-BB-10-H - 1707563

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug component, Nominal current: 10 A, Rated voltage (III/2): 24 V, Number of positions: 4, Pitch: 2.4 mm, Color: white, Contact surface: Tin, for flexible PCBs with a width of 10 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

### Product Features

- ✓ The small size enables connection even in applications where space is limited
- ✓ Easy connection of the PCB saves time
- ✓ According to IEC 60838-2-2
- ✓ The tight fit on the PCB and high current carrying capacity create a safe connection



### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	25 pc
Weight per Piece (excluding packing)	2.4 g
Custom tariff number	85366990
Country of origin	Germany

### Technical data

#### Dimensions

Length	8 mm
Height	4.8 mm
Width	11.2 mm
Pitch	2.4 mm

#### General

Insulating material group	IIIa
Rated voltage (III/2)	24 V
Nominal current $I_N$	10 A
Maximum load current	10 A (Total current of all contacts)

# Printed-circuit board connector - PTF 0,3/ 4-BB-10-H - 1707563

## Technical data

### General

Insulating material	PBT
Inflammability class according to UL 94	V0
Number of positions	4

## Classifications

### eCl@ss


eCl@ss 5.1	27141190
eCl@ss 6.0	27141190
eCl@ss 8.0	27440401

### ETIM


ETIM 4.0	EC002643
ETIM 5.0	EC002643

## Drawings

Drilling diagram



Dimensional drawing

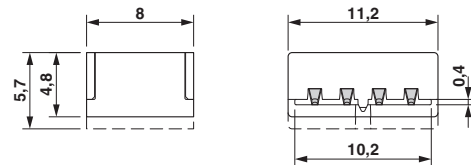

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)