


Socket strip - SFL (2,8-0,8)F32/ZD - 2285328

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Flat connector socket, Number of positions: 32, Pitch: 0 mm, Connection method: Slip-on connection, Color: green, Contact surface: Tin

The illustration shows the version
SFL (2,8-0,8) F 48



Key commercial data

Packing unit	1 pc
GTIN	 4 017918 055929
Weight per Piece (excluding packing)	35.47 GRM
Custom tariff number	85369010
Country of origin	Poland

Technical data

Dimensions

Length	14.8 mm
Height	28.6 mm
Width	95 mm
Pitch	0 mm
Hole diameter	2.8 mm

General

Range of articles	SFL (2,8-0,8)
Insulating material group	II
Rated surge voltage (III/3)	2.5 kV
Nominal cross section	0 mm ²
Insulating material	PA-F

Socket strip - SFL (2,8-0,8)F32/ZD - 2285328

Technical data

General

Inflammability class according to UL 94	HB
Number of positions	32

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440490
eCl@ss 8.0	27440490

ETIM

ETIM 3.0	EC000516
ETIM 4.0	EC002498
ETIM 5.0	EC000516

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

GOST

Ex Approvals

Approvals submitted

Socket strip - SFL (2,8-0,8)F32/ZD - 2285328


Approvals

Approval details

GOST 

Drawings

Dimensioned drawing

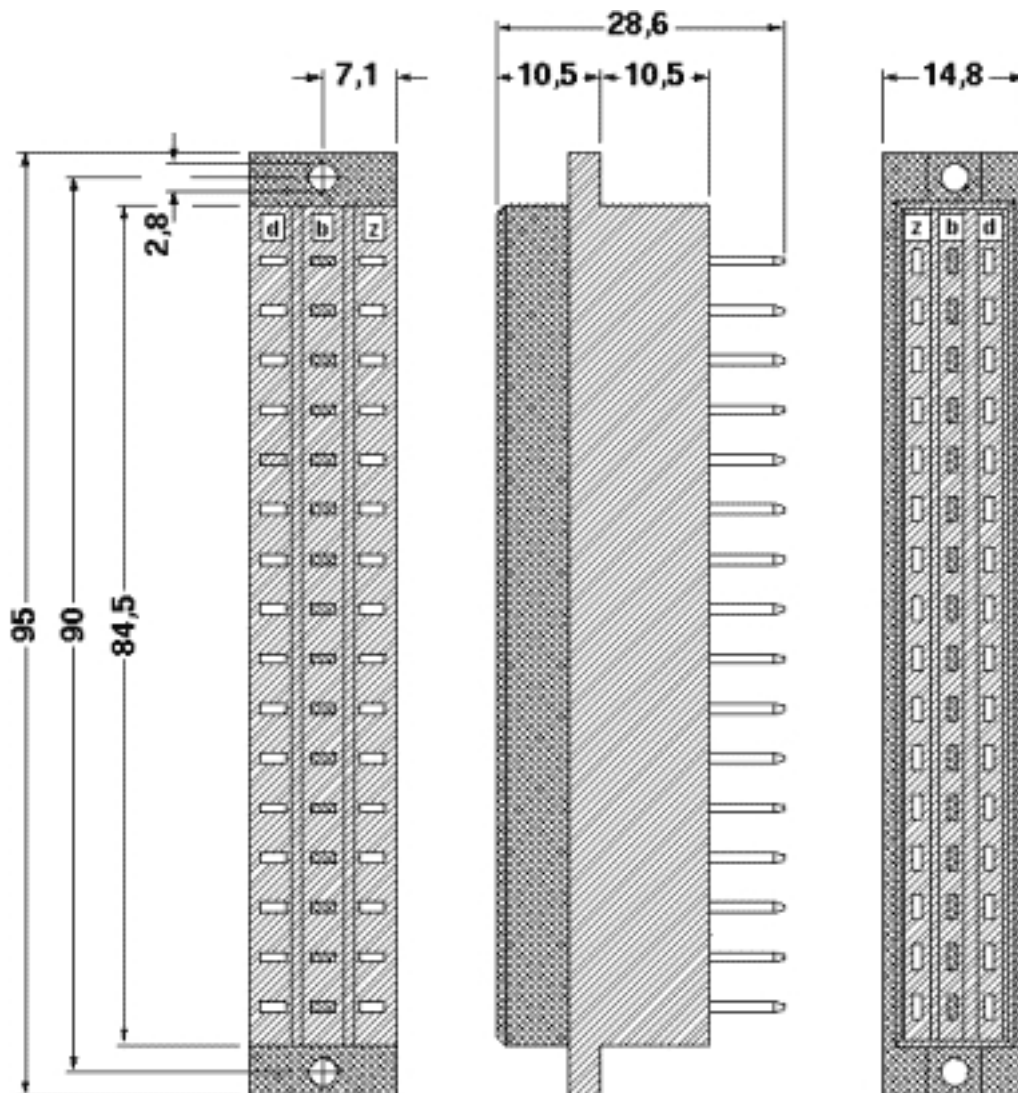

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)