

Connection distributor - PSM PTK-4 - 2799364

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Passive RS-485 T-distributor, fitted with one 9-pin D-SUB pin strip and five 9-pin D-SUB socket strips



Key commercial data

Packing unit	1
Minimum order quantity	1
Catalog page	Page 577 (IF-2011)
GTIN	 4 017918 074050
Custom tariff number	85366990
Country of origin	GERMANY

Technical data

General data

Nominal voltage U_N	60 V AC/DC
Nominal current I_N	1 A
Bus system	RS-485
Shielding	D-SUB frame
Test voltage	500 V AC (50 Hz, 1 min, rms)
Ambient temperature (operation)	-25 °C ... 70 °C
Housing material	PVC
Inflammability class according to UL 94	V0
Pin assignment	all 1:1
Width	89.8 mm
Height	89.6 mm
Length	39 mm

Connection data

Connection	Incoming
Number of positions	9

Connection distributor - PSM PTK-4 - 2799364

Technical data

Connection data

Connection method	D-SUB-9 male connector
Connection	Outgoing
Number of positions	9
Connection method	D-SUB-9 female connector
Connection	Branching
Number of positions	9
Connection method	4 x D-SUB-9 socket

Classifications

ETIM

ETIM 2.0	EC001423
ETIM 3.0	EC001423
ETIM 4.0	EC001423
ETIM 5.0	EC001423

UNSPSC

UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	39121008
UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008

eCl@ss

eCl@ss 4.0	27230207
eCl@ss 4.1	27230207
eCl@ss 5.0	27230207
eCl@ss 5.1	27230207
eCl@ss 6.0	27230207
eCl@ss 7.0	27230207

Approvals

Approvals

Approvals

GOST

Ex Approvals

Approvals submitted

Connection distributor - PSM PTK-4 - 2799364


Approvals

Approval details




Drawings

Circuit diagram

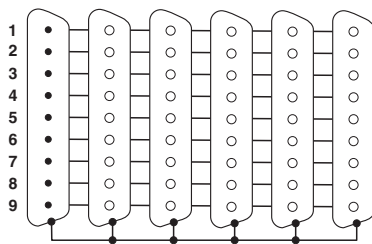

Dimensioned drawing

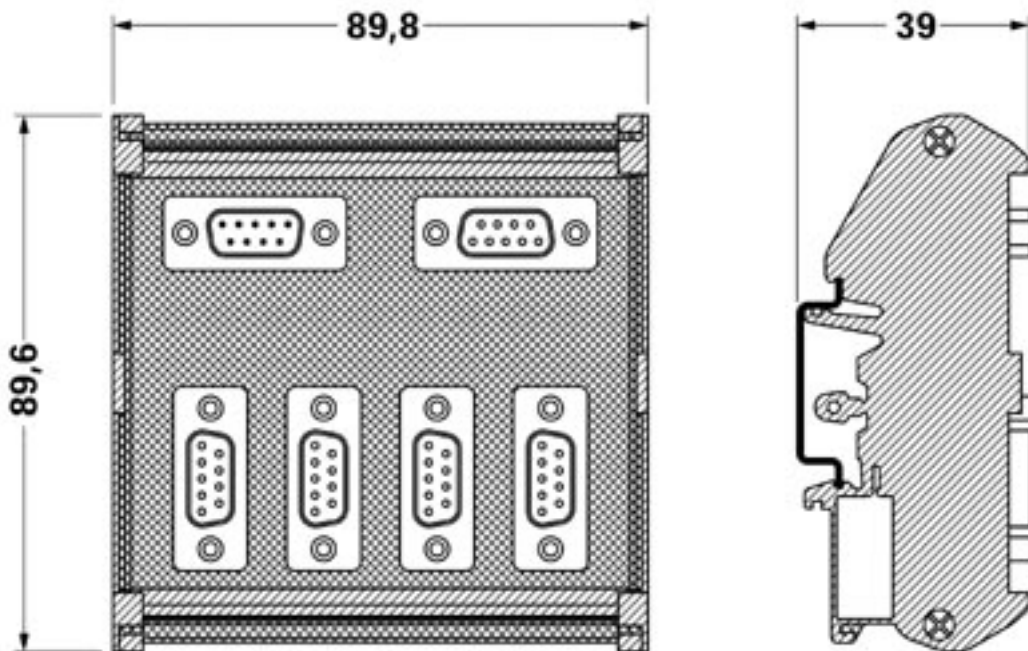

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)