

Housing - HC-EVO-D25-BWSC-PLR-BK - 1411345

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON EVO panel mounting base, plastic, D25, with single locking latch, flat gasket, and protective cover

Product Features

- Lower costs than metal version
- Low weight
- Lower risk of condensation
- Both contact insert PE sheets are connected by means of a metal frame integrated in the sleeve housing
- Metal inlays ensure leading PE contact with angled plugs
- Completely corrosion-resistant
- Halogen-free plastic
- Impact test according to IK 08



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 60.0 g |
| Custom tariff number | 85389099 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|-------------------------------|-------|
| Height | 26 mm |
| Width | 39 mm |
| Length | 97 mm |
| Length of the assembly cutout | 74 mm |
| Width of the assembly cutout | 24 mm |

Ambient conditions

Housing - HC-EVO-D25-BWSC-PLR-BK - 1411345

Technical data

Ambient conditions

| | |
|----------------------------------------|-------------------------------------|
| Degree of protection of housing (IP) | IP66 |
| | IP66 (with closed protective cover) |
| Degree of protection of housing (NEMA) | 4 (UL50e / NEMA 250) |
| | 4X (UL50e / NEMA 250) |
| | 12 (UL50e / NEMA 250) |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|----------------------------------------|-----------------------------------------------------------|
| Note | For contact inserts HC-D25, A16 |
| Size | D25 |
| Housing type | Panel mounting base |
| Color | black |
| Locking type | With single locking latch |
| Torque | 0.5 Nm ... 1.7 Nm (Fixing screws for panel mounting base) |
| Screw connection | none |
| Protective cover | Yes |
| Housing material | Polyamide |
| Material lock | Polyamide |
| Material, protective cover | Polyamide |
| Flammability rating according to UL 94 | V0 |

Standards and Regulations

| | |
|----------------------------------------|----|
| Flammability rating according to UL 94 | V0 |
|----------------------------------------|----|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 8.0 | 27440202 |
| eCl@ss 9.0 | 27440202 |

ETIM

| | |
|----------|----------|
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

Approvals

Approvals

Housing - HC-EVO-D25-BWSC-PLR-BK - 1411345

Approvals

Approvals

EAC / GL

Ex Approvals

Approvals submitted


Approval details

EAC

GL


Drawings

Dimensional drawing

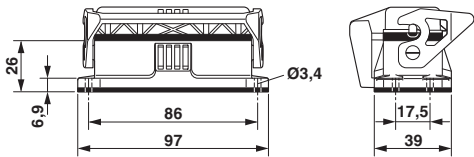

Dimensional drawing

Dimensional drawing

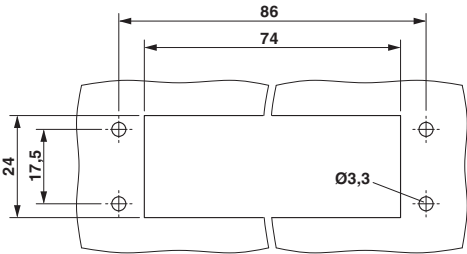

Panel cutout

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)