

## Patch cable - VS-FSDB-IP20SDA/981/5,0 SCO - 1420184

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled USB cable, shielded, color: black, PVC outer sheath, USB mini-B/IP20 on USB type A/IP20, length: 5 m



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	250.0 g
Custom tariff number	85444290
Country of origin	Germany

### Technical data

#### Mechanical characteristics

Number of positions	4
Shielded	Yes
Insertion/withdrawal cycles	≥ 100
Cable structure	2x2xAWG26/7 + 2xAWG20/19; S/FTP
Length of cable	5 m

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 80 °C (cable, flexible installation)
Degree of protection	IP20

#### Material data

Flammability rating according to UL 94	V0
Contact material	Cu alloy
Contact surface material	Ni/Au
Outer sheath, material	PVC
External sheath, color	black

## Patch cable - VS-FSDB-IP20SDA/981/5,0 SCO - 1420184

### Technical data

#### Electrical characteristics

Transmission characteristics (category)	USB 2.0
---	---------

#### Standards and Regulations

Flammability rating according to UL 94	V0
--	----

### Classifications

#### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27259205
eCl@ss 6.0	27269202
eCl@ss 7.0	27449203
eCl@ss 8.0	27060308

#### ETIM

ETIM 4.0	EC001408
ETIM 5.0	EC001408


#### UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

### Drawings


## Patch cable - VS-FSDB-IP20SDA/981/5,0 SCO - 1420184

Schematic diagram



Pin assignment plug USB, type A

Dimensional drawing

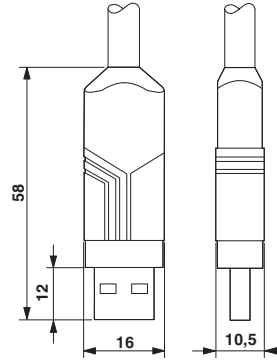

USB connector, type A, Standard

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)