

## Panel mounting base - HC-MOD-K-AFS-PE - 1408533

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Plastic panel mounting base for modules for a module slot, with PE marking for pos. 1, for snap locking

### Key commercial data

|                        |                                                                                                        |
|------------------------|--------------------------------------------------------------------------------------------------------|
| Packing unit           | 0                                                                                                      |
| Minimum order quantity | 2                                                                                                      |
| Catalog page           | Page 555 (PC-2011)                                                                                     |
| GTIN                   | <br>4 046356 619271 |
| Custom tariff number   | 85389099                                                                                               |
| Country of origin      | GERMANY                                                                                                |

### Technical data

#### General data

|                                         |                                                                 |
|-----------------------------------------|-----------------------------------------------------------------|
| Height                                  | 22.4 mm                                                         |
| Width                                   | 21.8 mm                                                         |
| Length                                  | 54 mm                                                           |
| Color                                   | light gray                                                      |
| Locking type                            | for snap locking                                                |
| Screw connection                        | None                                                            |
| Degree of protection for housing        | IP65 protection when the connector is inserted                  |
| Ambient temperature (operation)         | -40 °C ... 85 °C                                                |
| Housing material                        | polycarbonate                                                   |
| Inflammability class according to UL 94 | V0                                                              |
| Length of the assembly cutout           | 37 mm                                                           |
| Width of the assembly cutout            | 18 mm                                                           |
| Assembly instructions                   | For housing with PE marking, pos. 1 of the module is used as PE |

### Classifications

#### eclass

|            |          |
|------------|----------|
| eCl@ss 4.0 | 23090101 |
| eCl@ss 4.1 | 23090101 |

# Panel mounting base - HC-MOD-K-AFS-PE - 1408533

## Classifications

### eclass

|            |          |
|------------|----------|
| eCl@ss 5.0 | 23090101 |
| eCl@ss 5.1 | 23090101 |
| eCl@ss 6.0 | 23090101 |
| eCl@ss 7.0 | 23090101 |

### etim

|          |          |
|----------|----------|
| ETIM 4.0 | EC000437 |
|----------|----------|

### unspsc

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31161807 |
| UNSPSC 7.0901 | 31161807 |
| UNSPSC 11     | 31161807 |
| UNSPSC 12.01  | 31161807 |
| UNSPSC 13.2   | 31161807 |

## Accessories

### Accessories


Coding profile - HC-MOD-K-CP - 1408562



Coding profile for HC-MOD-K... housing


## Drawings

### Dimensioned drawing

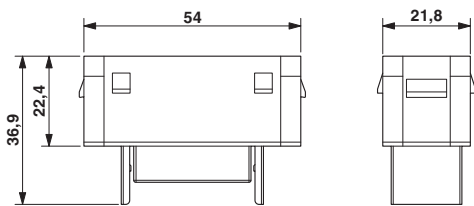

Dimensional drawing

### Dimensioned drawing

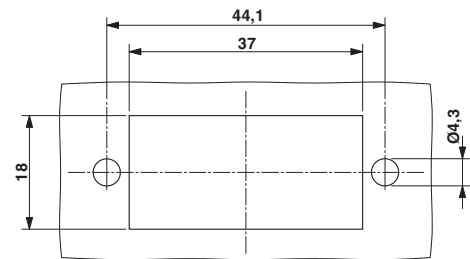

Panel cutout

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)