

Intermediate element - ME MAX 45 MT G 3-3 KMGY - 2200637

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail housing, Intermediate element, tall design, without vents, width: 22.6 mm, height: 99 mm, depth: 112.85 mm, color: light grey (7035)

Your advantages

- ✓ Easy installation
- ✓ Variety of connection technology
- ✓ Can be mounted on the DIN rail



Key Commercial Data

Packing unit	10 pc
Minimum order quantity	10 pc
GTIN	 4 046356 645348
GTIN	4046356645348

Technical data

Item properties

Brief article description	Intermediate element
Type	ME MAX 45 MT G 3-3 KMGY
Item no.	2200637
Housing type	DIN rail housing
Housing series	ME-MAX
Range of articles	ME MAX...G 3-3
Type	Intermediate element, tall design
Max. IP code to attain	IP20
Mounting type	DIN rail mounting
Number of rows	3
Connection levels	3 (Both sides)
Ventilation openings present	no

Intermediate element - ME MAX 45 MT G 3-3 KMGY - 2200637

Technical data

Dimensions

Caption	Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.
Width [w]	22.6 mm
Height [h]	99 mm
Depth [d]	112.85 mm
Depth from top edge of DIN rail [d]	107 mm

Material data

Housing material	Polyamide
Surface characteristics	untreated
Color (RAL)	light grey (7035)
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0

Ambient conditions

Ambient temperature (storage/transport)	-40 °C ... 55 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C ... 105 °C (depending on power dissipation)
Relative humidity (storage/transport)	80 %

PCB data

Number of PCB holders	2
Mounting position	Vertical (horizontal DIN rail)
Type of PCB mount	Latching

General information

Type of note	Assembly instruction:
Note	Refer to the data sheet for the range in the download area.

Packaging information

Type of packaging	packed in cardboard
Pieces per package	10
Denomination packing units	Pcs.
Outer packaging type	Carton

Standards and regulations

Flammability rating according to UL 94	V0
--	----


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Intermediate element - ME MAX 45 MT G 3-3 KMGY - 2200637

Dimensional drawing

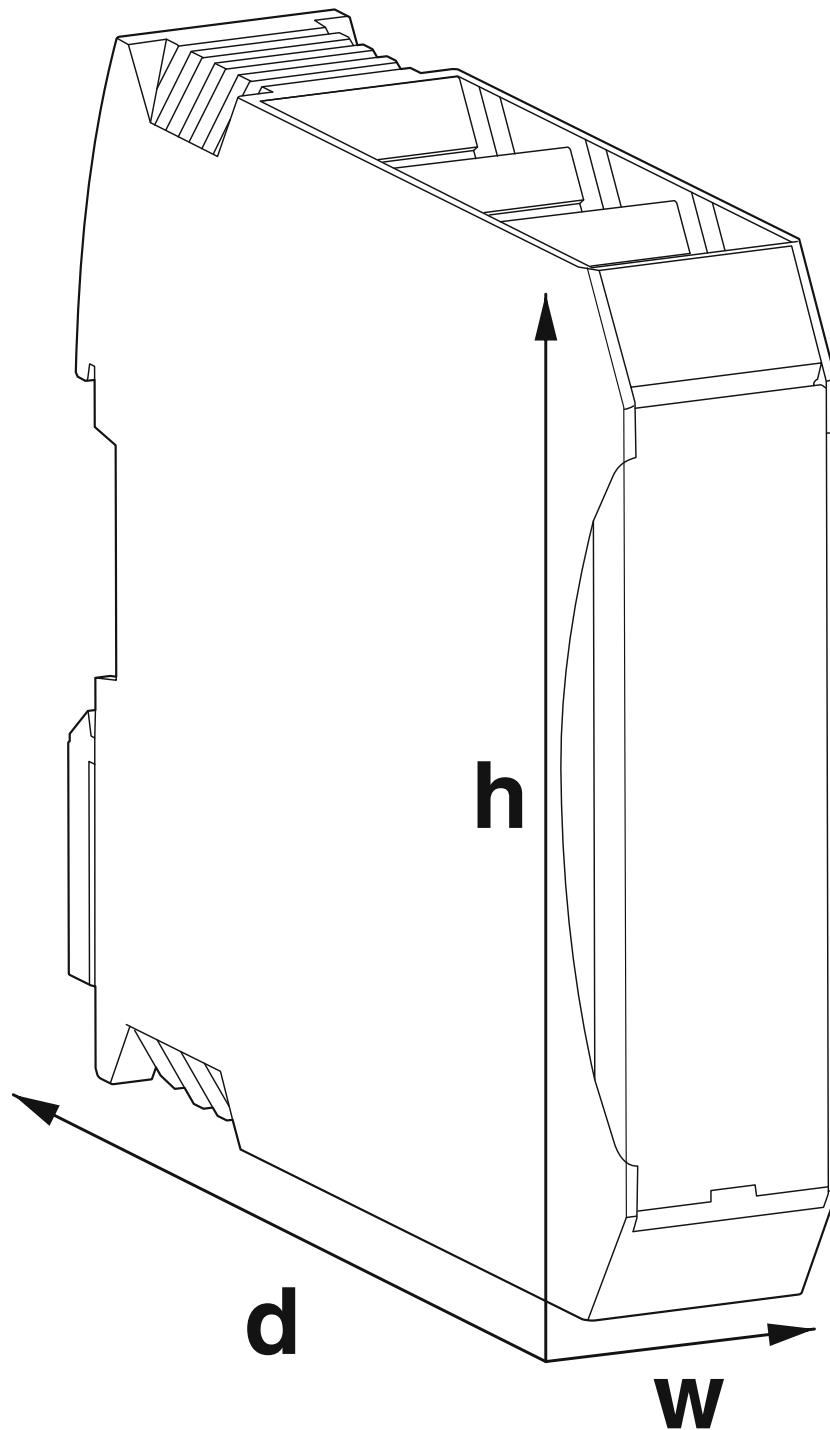

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.

06/29/2022 Page 3/5

Intermediate element - ME MAX 45 MT G 3-3 KMGY - 2200637

Classifications

eCl@ss

eCl@ss 11.0	27182702
eCl@ss 4.0	27180400
eCl@ss 4.1	27180400
eCl@ss 5.0	27180500
eCl@ss 5.1	27180500
eCl@ss 6.0	27180800
eCl@ss 7.0	27182702

ETIM

ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 6.0	EC001031
ETIM 7.0	EC001031

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501
UNSPSC 18.0	31261501
UNSPSC 19.0	31261501
UNSPSC 20.0	31261501
UNSPSC 21.0	31261500

Approvals

Approvals

Approvals

UL Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 240868
---------------	---	---	---------------

Phoenix Contact 2022 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)