

Device connector, front mounting - RC-19S1N122200 - 1602789

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Device connector for front wall, straight, shielded: Yes, Screw locking, M23, Number of positions: 16+3, Type of contact: Socket, Solder connection, Flat gasket, 4xØ2,7, Flange dimensions: 25 mm x 25 mm, Panel thickness min.: 1 mm

The figure shows the 12-pos. product version

Product Features



Key commercial data

Packing unit	1 pc
Custom tariff number	85366990
Country of origin	Germany

Technical data

Product type	Circular connectors (device side)
Number of positions	19
Coding	N
Type	Device connector for front wall
Mounting type	4xØ2,7
Rated current (IEC)	10
Rated voltage (IEC)	150
Thread	M23
Shielding	Yes
Signal type	Signal

Device connector, front mounting - RC-19S1N122200 - 1602789

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260708
eCl@ss 7.0	27440312
eCl@ss 8.0	27440103

ETIM


ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 5.0	EC001121

UNSPSC


UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Drawings

Schematic diagram



Dimensional drawing

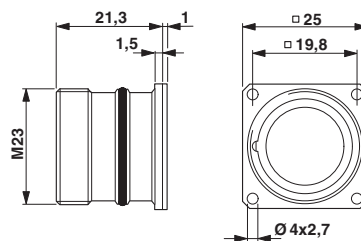

RC-00000002200
Flat gasket

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)