COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

The figure shows a similar product

COMBI receptacle, Connection method: Push-in connection, Number of positions: 10, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 35 mm, Height: 27.1 mm, Color: gray

Why buy this product

- For secure and space-saving accommodation of plug-in contacts in cable ducts and distributor shafts
- The Push-in technology COMBI couplings for self-assembly provide solutions that users can implement themselves

RoHS

Key Commercial Data

Packing unit	1 STK
Minimum order quantity	25 STK
Custom tariff number	85366990
Country of origin	Poland

Technical data

Environmental Product Compliance

China RoHS	No hazardous substances above threshold values

General

Number of positions	10
Number of levels	1
Number of connections	1
Potentials	10
Nominal cross section	1.5 mm²
Color	gray
Insulating material	PA
Flammability rating according to UL 94	V0

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Technical data

General

Maximum load current	17.5 A (with 1.5 mm² conductor cross section)
Rated surge voltage	6 kV
Degree of pollution	3
Overvoltage category	III
Insulating material group	I
Maximum load current	17.5 A (with 1.5 mm² conductor cross section)
Nominal current I_N	17.5 A
Nominal voltage U_N	500 V
Open side panel	Yes
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Static insulating material application in cold	-60 °C
Behavior in fire for rail vehicles (DIN 5510-2)	Test passed
Flame test method (DIN EN 60695-11-10)	V0
Oxygen index (DIN EN ISO 4589-2)	>32 %
NF F16-101, NF F10-102 Class I	2
NF F16-101, NF F10-102 Class F	2
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3

Dimensions

Width	35 mm
End cover width	2.2 mm
Length	43 mm
Height	27.1 mm
	20.8 mm
Pitch	3.5 mm

Connection data

Connection method	Push-in connection
Connection in acc. with standard	IEC 61984
Conductor cross section solid min.	0.14 mm²

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Technical data

Connection data

Conductor cross section solid max.	1.5 mm²
Conductor cross section AWG min.	26
Conductor cross section AWG max.	14
Conductor cross section flexible min.	0.14 mm²
Conductor cross section flexible max.	1.5 mm²
Min. AWG conductor cross section, flexible	26
Max. AWG conductor cross section, flexible	14
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.14 mm²
Conductor cross section flexible, with ferrule without plastic sleeve max.	1.5 mm²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.14 mm²
Conductor cross section flexible, with ferrule with plastic sleeve max.	1 mm²
Stripping length	8 mm
Internal cylindrical gage	A1 / B1

Standards and Regulations

Connection in acc. with standard	IEC 61984
Flammability rating according to UL 94	V0

Drawings

Circuit diagram

Diagram

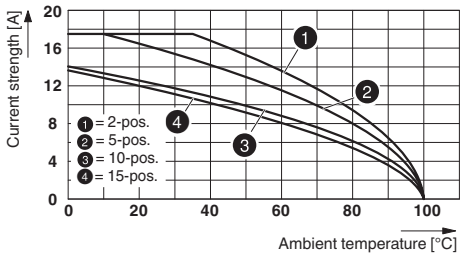

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27141151
eCl@ss 7.0	27141151
eCl@ss 8.0	27141106

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Classifications

eCl@ss

eCl@ss 9.0	27141106

ETIM

ETIM 3.0	EC000897
ETIM 4.0	EC002021
ETIM 5.0	EC001284

UNSPSC

UNSPSC 6.01	30211802
UNSPSC 7.0901	39121402
UNSPSC 11	39121402
UNSPSC 12.01	39121402
UNSPSC 13.2	39121402

Accessories

Accessories

Cable housing

Cable housing - PH 1,5/S/3 - 3212756

Cable housing, Pitch: 10.5 mm, Length: 19.9 mm, Width: 10.5 mm, Height: 36.8 mm, Number of positions: 3, Color: gray

---

Cable housing - PH 1,5/S/4 - 3212769

Cable housing, Pitch: 14 mm, Length: 19.9 mm, Width: 14 mm, Height: 36.8 mm, Number of positions: 4, Color: gray

---

Cable housing - PH 1,5/S/5 - 3212772

Cable housing, Pitch: 17.5 mm, Length: 19.9 mm, Width: 17.5 mm, Height: 36.8 mm, Number of positions: 5, Color: gray

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

Cable housing - PH 1,5/S/6 - 3212785

Cable housing, Pitch: 21 mm, Length: 19.9 mm, Width: 21 mm, Height: 36.8 mm, Number of positions: 6, Color: gray

Cable housing - PH 1,5/S/7 - 3212798

Cable housing, Pitch: 24.5 mm, Length: 19.9 mm, Width: 24.5 mm, Height: 36.8 mm, Number of positions: 7, Color: gray

Cable housing - PH 1,5/S/8 - 3212808

Cable housing, Pitch: 28 mm, Length: 19.9 mm, Width: 28 mm, Height: 36.8 mm, Number of positions: 8, Color: gray

Cable housing - PH 1,5/S/9 - 3212811

Cable housing, Pitch: 31.5 mm, Length: 19.9 mm, Width: 31.5 mm, Height: 36.8 mm, Number of positions: 9, Color: gray

Cable housing - PH 1,5/S/10 - 3212824

Cable housing, Pitch: 35 mm, Length: 19.9 mm, Width: 35 mm, Height: 36.8 mm, Number of positions: 10, Color: gray

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

Cable housing - PH 1,5/S/11 - 3212837

Cable housing, Pitch: 38.5 mm, Length: 19.9 mm, Width: 38.5 mm, Height: 36.8 mm, Number of positions: 11, Color: gray

Cable housing - PH 1,5/S/12 - 3212840

Cable housing, Pitch: 42 mm, Length: 19.9 mm, Width: 42 mm, Height: 36.8 mm, Number of positions: 12, Color: gray

Cable housing - PH 1,5/S/13 - 3212853

Cable housing, Pitch: 45.5 mm, Length: 19.9 mm, Width: 45.5 mm, Height: 36.8 mm, Number of positions: 13, Color: gray

Cable housing - PH 1,5/S/14 - 3212866

Cable housing, Pitch: 49 mm, Length: 19.9 mm, Width: 49 mm, Height: 36.8 mm, Number of positions: 14, Color: gray

Coding element

Coding star - PC - 3040588

Coding star, Length: 3 mm, Width: 3 mm, Height: 6 mm, Color: red

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

End cover

End cover - D-PPC 1,5/S - 3213690

End cover, Length: 27 mm, Width: 2.2 mm, Color: gray

Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663

Insulating sleeve, Color: white

Insulating sleeve - MPS-IH RD - 0201676

Insulating sleeve, Color: red

Insulating sleeve - MPS-IH BU - 0201689

Insulating sleeve, Color: blue

Insulating sleeve - MPS-IH YE - 0201692

Insulating sleeve, Color: yellow

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

Insulating sleeve - MPS-IH GN - 0201702

Insulating sleeve, Color: green

Insulating sleeve - MPS-IH GY - 0201728

Insulating sleeve, Color: gray

Insulating sleeve - MPS-IH BK - 0201731

Insulating sleeve, Color: black

Labeled terminal marker

Zack Marker strip, flat - ZBF 3,5 CUS - 0829394

Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, Mounting type: Snap into flat marker groove, for terminal block width: 3.5 mm, Lettering field: 3.5 x 5.2 mm

Zack Marker strip, flat - ZBF 3,5,LGS:FORTL.ZAHLEN - 0801406

Zack Marker strip, flat, Strip, white, labeled, Printed horizontally: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 100, Mounting type: Snap into flat marker groove, for terminal block width: 3.5 mm, Lettering field: 5.15 x 3.5 mm

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

Zack Marker strip, flat - ZBF 3,5,QR:FORTL.ZAHLEN - 0801407

Zack Marker strip, flat, Strip, white, labeled, Printed vertically: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 100, Mounting type: Snap into flat marker groove, for terminal block width: 3.5 mm, Lettering field: 5.15 x 3.5 mm

---

Marker for terminal blocks - UCT-TMF 3,5 CUS - 0829644

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, Mounting type: Snap into flat marker groove, for terminal block width: 3.5 mm, Lettering field: 2.7 x 4.7 mm

---

Screwdriver tools

Screwdriver - SZF 0-0,4X2,5 - 1204504

Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

---

Screwdriver - ST-BW 0 - 1200135

Actuation tool, for all 1.5 mm² spring cages from PT 1,5/S and FT 1,5/S

Terminal marking

Zack Marker strip, flat - ZBF 3,5:UNBEDRUCKT - 0829392

Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into flat marker groove, for terminal block width: 3.5 mm, Lettering field: 3.5 x 5.2 mm

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

Marker for terminal blocks - UCT-TMF 3,5 - 0829486

Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: THERMOMARK CARD, BLUEMARK CLED, BLUEMARK LED, TOPMARK LASER, THERMOMARK PRIME, Mounting type: Snap into flat marker groove, for terminal block width: 3.5 mm, Lettering field: 2.7 x 4.7 mm

Test plug terminal block

Test plugs - MPS-MT - 0201744

Test plugs, Color: silver

Additional products

Plug - PP-H 1,5/S/1 - 3212484

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/1 BU - 3212497

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: blue

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

Plug - PP-H 1,5/S/1 GNYE - 3212507

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: green-yellow

Plug - PP-H 1,5/S/2 - 3212510

Plug, Connection method: Push-in connection, Number of positions: 2, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 7 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/3 - 3212523

Plug, Connection method: Push-in connection, Number of positions: 3, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 10.5 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/4 - 3212536

Plug, Connection method: Push-in connection, Number of positions: 4, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 14 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/5 - 3212549

Plug, Connection method: Push-in connection, Number of positions: 5, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 17.5 mm, Height: 31.3 mm, Color: gray

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

Plug - PP-H 1,5/S/6 - 3212552

Plug, Connection method: Push-in connection, Number of positions: 6, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 21 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/7 - 3212565

Plug, Connection method: Push-in connection, Number of positions: 7, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 24.5 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/8 - 3212578

Plug, Connection method: Push-in connection, Number of positions: 8, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 28 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/9 - 3212581

Plug, Connection method: Push-in connection, Number of positions: 9, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 31.5 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/10 - 3212594

Plug, Connection method: Push-in connection, Number of positions: 10, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 35 mm, Height: 31.3 mm, Color: gray

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

Plug - PP-H 1,5/S/11 - 3212604

Plug, Connection method: Push-in connection, Number of positions: 11, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 38.5 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/12 - 3212617

Plug, Connection method: Push-in connection, Number of positions: 12, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 42 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/13 - 3212620

Plug, Connection method: Push-in connection, Number of positions: 13, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 45.5 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/14 - 3212633

Plug, Connection method: Push-in connection, Number of positions: 14, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 49 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/15 - 3212646

Plug, Connection method: Push-in connection, Number of positions: 15, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 52.5 mm, Height: 31.3 mm, Color: gray

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

Plug - PP-H 1,5/S/1-L - 3212659

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/1-L BU - 3212662

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: blue

Plug - PP-H 1,5/S/1-L GNYE - 3212675

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: green-yellow

Plug - PP-H 1,5/S/1-M - 3212688

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/1-M BU - 3212691

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: blue

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

Plug - PP-H 1,5/S/1-M GNYE - 3212701

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: green-yellow

Plug - PP-H 1,5/S/1-R - 3212714

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: gray

Plug - PP-H 1,5/S/1-R BU - 3212727

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: blue

Plug - PP-H 1,5/S/1-R GNYE - 3212730

Plug, Connection method: Push-in connection, Number of positions: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Height: 31.3 mm, Color: green-yellow

Strain relief - PZ 1,5/S/2 - 3212918

Strain relief, Number of positions: 2, Color: black

Downloaded From Oneyac.com

COMBI receptacle - PPC 1,5/S-NS/10 - 3213468

Accessories

Latching - PRZ 1,5/S - 3212905

Latching, Length: 3 mm, Width: 3.5 mm, Color: orange

Latching - PR 1,5/S/2 - 3212895

Latching, Color: orange

Latching - PR 1,5/S - 3212882

Latching, Color: orange

Phoenix Contact 2016 © - all rights reserved
http://www.phoenixcontact.com

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>Phoenix Contact(菲尼克斯)

Downloaded From Oneyac.com