

Marker for terminal blocks - US-TM 100 CUS



0829948

<https://www.phoenixcontact.com/in/products/0829948>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

Marker for terminal blocks, can be ordered: by card, white, labeled according to customer specifications, mounting type: snap into universal marker groove, lettering field size: 104 x 9.8 mm, Number of individual labels: 13



Your advantages

- The cards provide space for including function texts
- Labeling service: Phoenix Contact can custom-label all UniSheet markers according to your requirements
- The perforated marking strips are easy to separate and can be easily fitted
- The US-TM 100 UniSheet markers are suitable for products with universal marker grooves

Marker for terminal blocks - US-TM 100 CUS



0829948

<https://www.phoenixcontact.com/in/products/0829948>

Commercial Data

Order Key	0829948
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BG8
Product Key	BG8119
Catalog Page	Page 90 (C-5-2013)
GTIN	4046356609982
Weight per Piece (including packing)	15.414 g
Weight per Piece (excluding packing)	15.28 g
Customs tariff number	49119900
Country of origin	PL

Technical Data

Product properties

Type	flat
------	------

Marking

Number of individual labels	13
Number of individual labels per row	1

Marking technology

Device	5146464 THERMOMARK CARD
Ink ribbon	5146451 THERMOMARK CARD-US-MAG1 0801371 THERMOMARK-RIBBON 110-TC
Printability	Thermal transfer

Ambient conditions

Ambient temperature (operation)	-30 °C ... 80 °C
Recommended storage conditions	10 ... 30 °C / 40 ... 70 % relative humidity. Storage in the original packaging is recommended prior to processing.

Mounting

Mounting type	snap into universal marker groove
---------------	-----------------------------------

Material specifications

Color	white
Material	PVC PVC
Flammability rating according to UL 94	V0
Components	Silicone-free

Environmental and real-life conditions

Test for substances that would hinder coating with paint or varnish

	VW PV 3.10.7:2005-02
Result	Test passed

Weathering-resistance

Specification	Test passed
Result	Test passed
Test duration	96 h

Ambient conditions

Ambient temperature (operation)	-30 °C ... 80 °C
Recommended storage conditions	10 ... 30 °C / 40 ... 70 % relative humidity. Storage in the original packaging is recommended prior to processing.

Dimensions

Marker for terminal blocks - US-TM 100 CUS



0829948

<https://www.phoenixcontact.com/in/products/0829948>



Width	104 mm
Height	0.5 mm
Length	9.8 mm

Standards and regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
-----------------	-----------------------------

Drawings

Schematic diagram

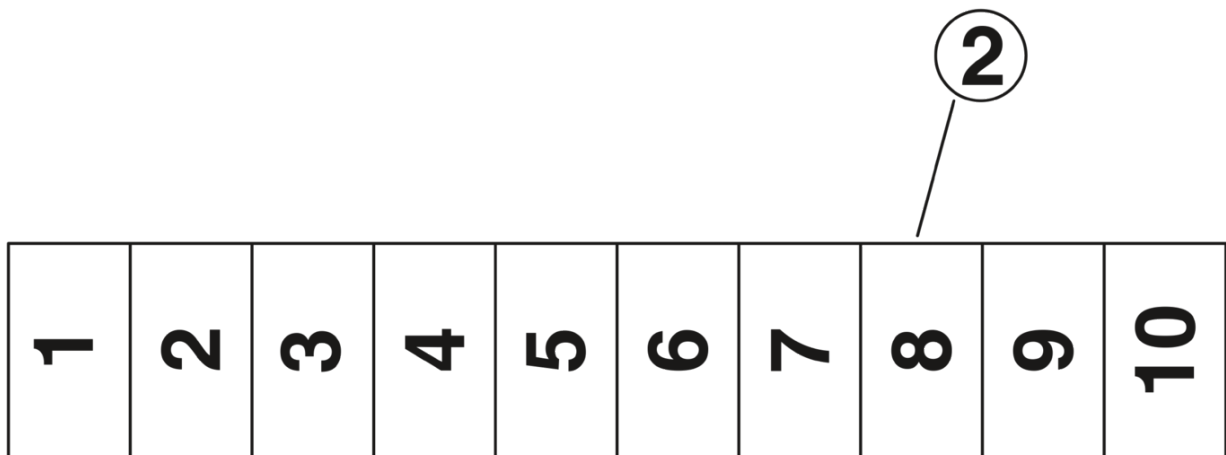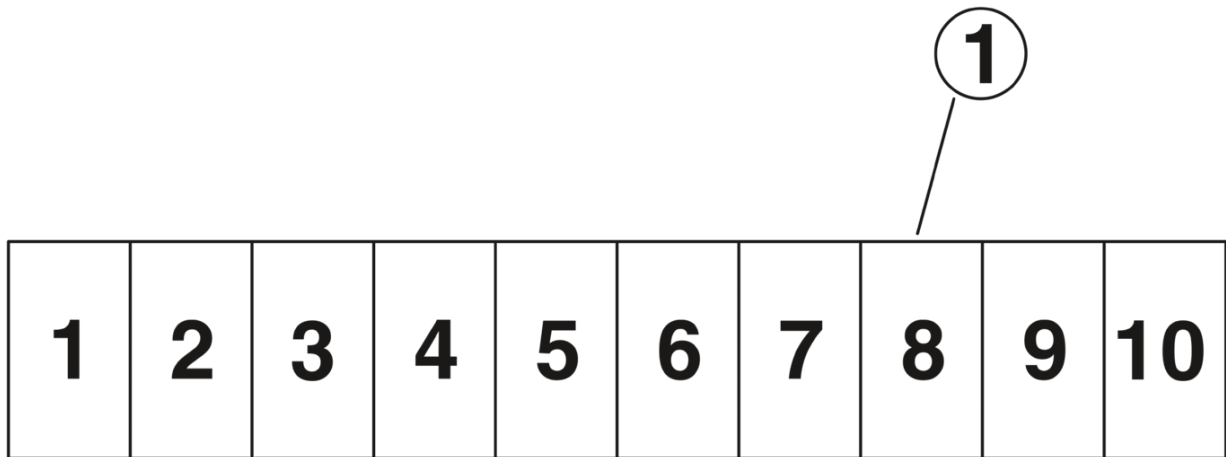

- ① Horizontal
- ② Vertical

Marker for terminal blocks - US-TM 100 CUS



0829948

<https://www.phoenixcontact.com/in/products/0829948>

Classifications

ECLASS

ECLASS-9.0	27141137
ECLASS-10.0.1	27141137
ECLASS-11.0	27281101

ETIM

ETIM 6.0	EC000761
----------	----------

UNSPSC

UNSPSC 19.0	39131505
UNSPSC 20.0	39131505
UNSPSC 21.0	39131505

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in

单击下面可查看定价，库存，交付和生命周期等信息

[>>Phoenix Contact\(菲尼克斯\)](#)