



## Description

PJ73H Series are a set of three-terminal, low power, high voltage regulators implemented in CMOS technology. The series features extremely low quiescent current which is typically  $2.0\mu\text{A}$ . They allow input voltages as high as 20V. The device provides large current with a significantly small dropout voltage.

PJ73H Series consists of a high-precision voltage reference, an error correction circuit, an over temperature protection circuit, and a current limited output driver. They are available with several fixed output voltages ranging from 1.8V to 5.5V. CMOS technology ensures low dropout voltage and low current consumption.

PJ73H Series are available in standard SOT-23, SOT-23-3 and SOT-89 packages. Standard products are Pb-free and Halogen-free.


## Features

- Maximum Output Current: 500mA
- Input Voltage Range: 3V~20V
- Quiescent current: 2uA(Typ.)
- Dropout Voltage: 140mV@100mA ( $V_{\text{OUT}}=3.3\text{V}$ )
- Output Voltage Range: 1.8V~5.5V
- PSRR: 70dB @10KHz
- Fast Load Transient Response
- Good Line Regulation: 0.01%/V
- Good Load Regulation: 5mV@ $1\text{mA}\leq I_{\text{OUT}}\leq 50\text{mA}$
- Soft Start

## Applications


- Battery Powered Equipment
- Voltage Regulator for Microprocessor
- Voltage Regulator for LAN Cards
- Wireless Communication Equipment
- Audio/Video Equipment

## Typical Application Circuit

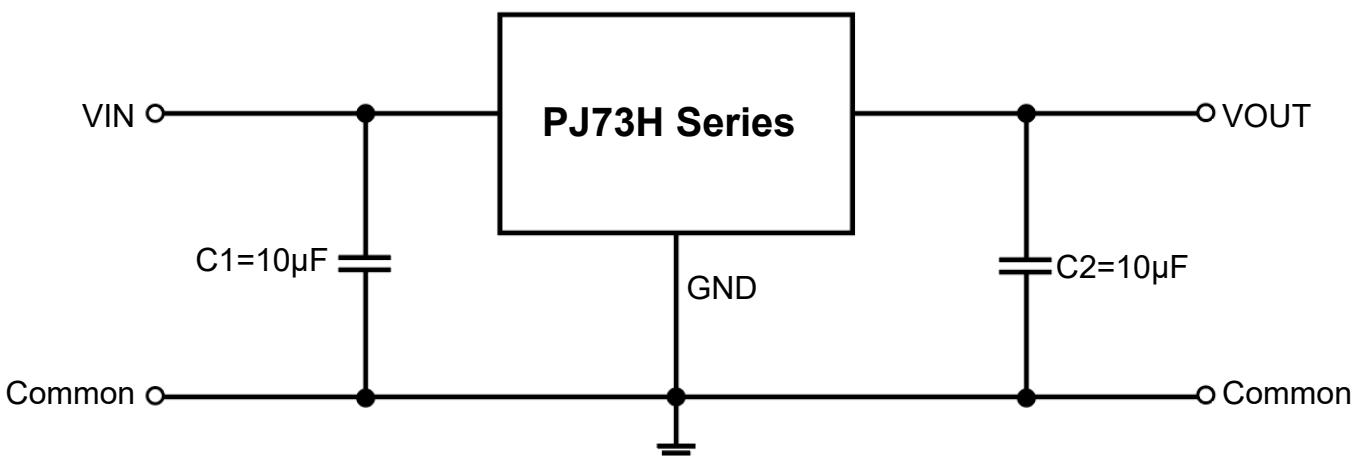


### Pin Distribution

**SOT-23**




**(Top View)**

**SOT-89**



**(Top View)**


**SOT-23-3**



**(Top View)**

### Functional Pin Description

Pin Name	Pin Function
VIN	Power Input Voltage
GND	Ground
VOUT	Output Voltage



# PJ73H Series Low Dropout Regulators

## Ordering Information

PJ73H □□□□

Package Type

SA:SOT-23

SC:SOT-23-3

SQ:SOT-89




Output Voltage

28 : 2.8V 30 : 3.0V 33 : 3.3V

36 : 3.6V 40 : 4.0V 50 : 5.0V

Output current tap

M : 500mA

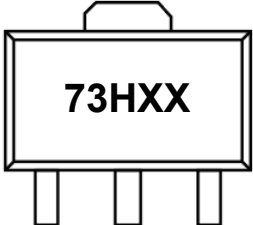
Orderable Device	Package	Reel (inch)	Package Qty (PCS)	Eco Plan <sup>Note</sup>	MSL Level	Marking Code
PJ73HM28SA	SOT-23	7	3000	RoHS & Green	MSL1	 XX:Output Voltage e.g. 30:3.0V
PJ73HM30SA						
PJ73HM33SA						
PJ73HM36SA						
PJ73HM40SA						
PJ73HM50SA						
PJ73HM28SQ	SOT-89	7/13	1000/3000	RoHS & Green	MSL1	 XX:Output Voltage e.g. 30:3.0V
PJ73HM30SQ						
PJ73HM33SQ						
PJ73HM36SQ						
PJ73HM40SQ						
PJ73HM50SQ						
PJ73HM28SC	SOT-23-3	7	3000	RoHS & Green	MSL3	 XX:Output Voltage e.g. 30:3.0V
PJ73HM30SC						
PJ73HM33SC						
PJ73HM36SC						
PJ73HM40SC						
PJ73HM50SC						

### Note:

RoHS: PJ defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials.

Green: PJ defines "Green" to mean Halogen-Free and Antimony-Free.

### Function Block Diagram

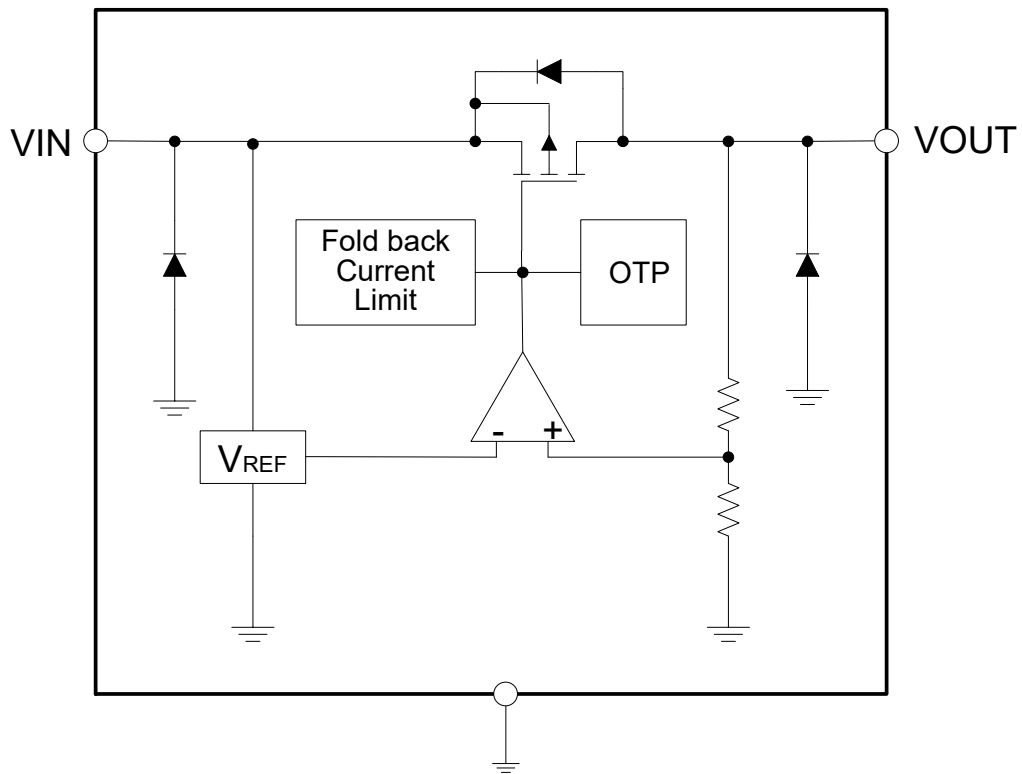



# PJ73H Series Low Dropout Regulators

## Absolute Maximum Ratings <sup>Note1</sup>

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter		Value	Unit
Input Voltage		-0.3~25	V
Output Voltage		-0.3~6	V
Power Dissipation	SOT-23	0.4	W
	SOT-23-3	0.45	W
	SOT-89	0.66	W
Thermal Resistance, Junction-to-Ambient	SOT-23	250	°C/W
	SOT-23-3	220	°C/W
	SOT-89	150	°C/W
Junction Temperature		-40~ +125	°C
Storage Temperature Range		-55~ +150	°C
Lead Temperature&Time		260°C, 10S	--
Human Body Mode ESD Level (HBM)		5.5	KV

Note1: Exceeding or exposure to these absolute rating limits may damage the device permanently or affect its reliability

## Recommended Operating Conditions

Parameter	Value	Unit
Supply Voltage	3~20	V
Operating Junction Temperature	0 ~ +125	°C
Operating Ambient Temperature	-40~ +85	°C



# PJ73H Series Low Dropout Regulators

## Electrical Characteristics



$V_{OUT}=3.3V$ ,  $T_A=25^{\circ}C$ , unless otherwise noted.)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage	$V_{IN}$		3	--	20	V
Output Voltage Accuracy	$\Delta V_{OUT}$	$V_{IN}=V_{OUT}+2V$ , $I_{OUT}=1mA$	-2	$V_{OUT}$	+2	%
Output Current	$I_{OUT}$	Within $P_{D(Max)}$	500	--	--	mA
Quiescent Current	$I_Q$	$I_{OUT}=0A$	--	2	--	$\mu A$
Dropout Voltage	$V_{DROP}$	$V_{OUT}=3.3V$ , $I_{OUT}=100mA$ , $\Delta V_{OUT}=2\%$	--	140	--	mV
		$V_{OUT}=5V$ , $I_{OUT}=100mA$ , $\Delta V_{OUT}=2\%$	--	115	--	mV
Line Regulation	$\Delta V_{LINE}$	$V_{IN}=5\sim 12V$ , $I_{OUT}=1mA$	--	--	6	mV
Load Regulation	$\Delta V_{LOAD}$	$V_{IN}=12V$ , $I_{OUT}=1\sim 100mA$	--	--	20	mV
Short Circuit/Start Carrying Current	$I_{SHORT}$	VOUT Short to GND with $1\Omega$	--	60	--	mA
VOUT Temperature Coefficient	$\frac{\Delta V_{OUT}}{(\Delta T_A * V_{OUT})}$	$I_{OUT}=1mA$ , $0^{\circ}C \leq T_A \leq 120^{\circ}C$	--	90	--	ppm/ $^{\circ}C$
Power Supply Rejection Rate	PSRR	$V_{IN}=5V_{DC}+0.5V_{P-P}$ $f=10KHz$ , $I_{OUT}=1mA$	--	70	--	dB
Thermal shutdown Protection (OTP)	TSD	$V_{IN}=V_{OUT} + 2V$ , $I_{OUT}=20mA$		150		$^{\circ}C$
OTP hysteresis	TSD_HYS			20		$^{\circ}C$




## Typical Electrical Curves

Test conditions:  $C_{IN}=1\mu F$ ,  $C_{OUT}=10\mu F$ ,  $V_{IN}=5V$ ,  $V_{OUT}=3.3V$ ,  $T_{OPR}=25^{\circ}C$ (unless otherwise noted)

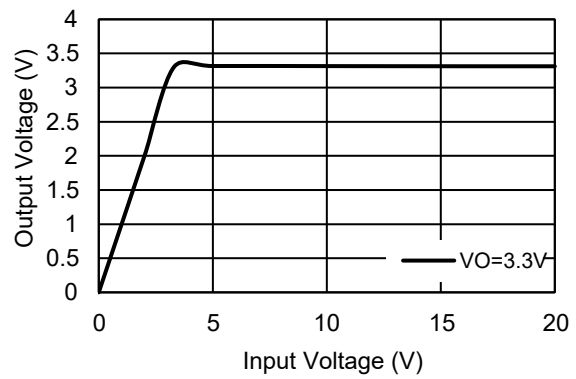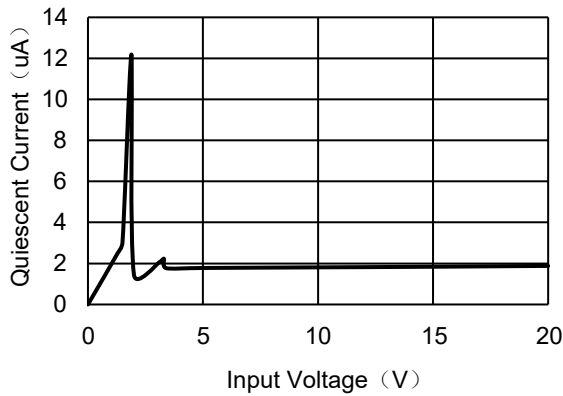


$V_{OUT}=3.3V$  SOT-89

### Output Voltage vs. Load Current

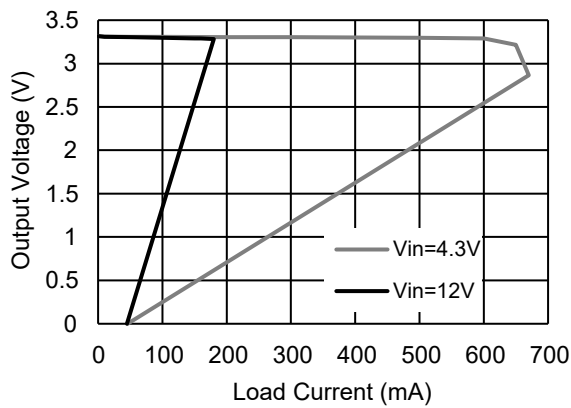


$V_{OUT}=3.3V$  SOT-23-3

### Output Voltage vs. Load Current

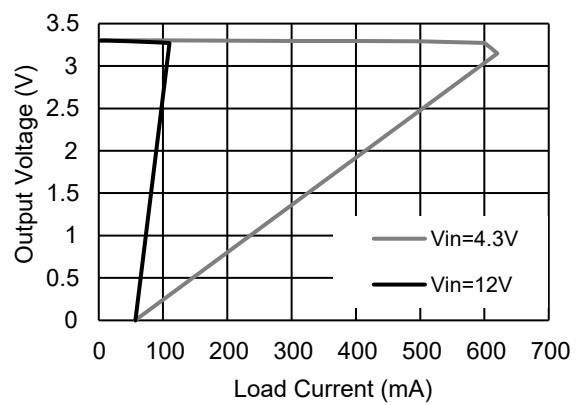


$V_{OUT}=3V$  SOT-89

### Output Voltage vs. Load Current

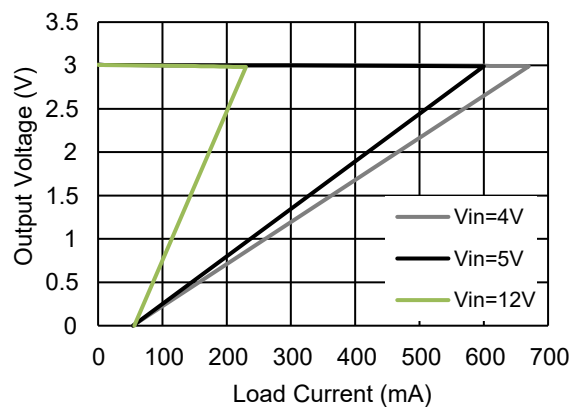

$V_{OUT}=3.6V$  SOT-89

### Output Voltage vs. Load Current

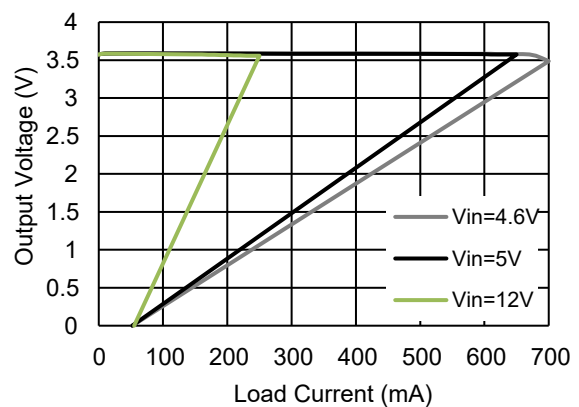




# PJ73H Series Low Dropout Regulators


$V_{OUT}=4V$  SOT-89

### Output Voltage vs. Load Current

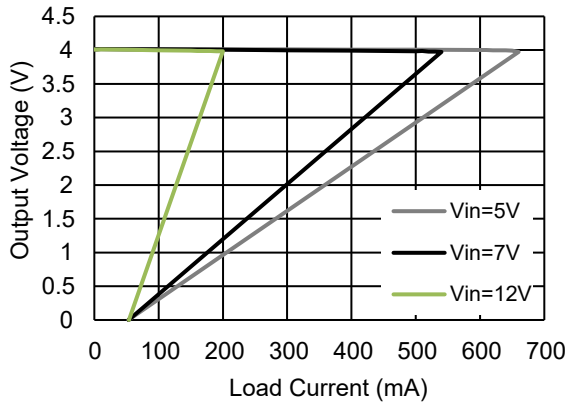


$V_{OUT}=5V$  SOT-89


### Output Voltage vs. Load Current

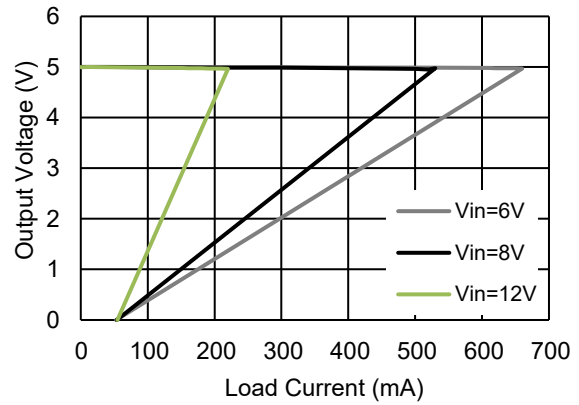

### Dropout Voltage vs. Output Current


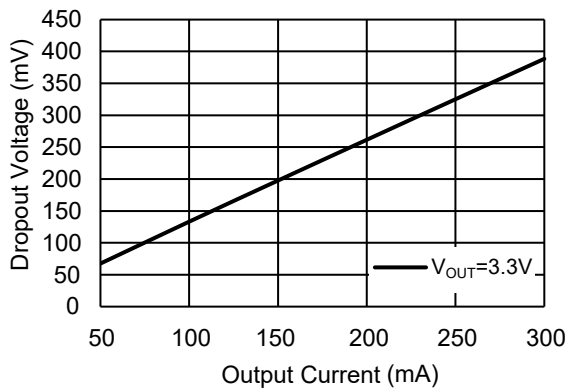


### Output Voltage vs. Temperature

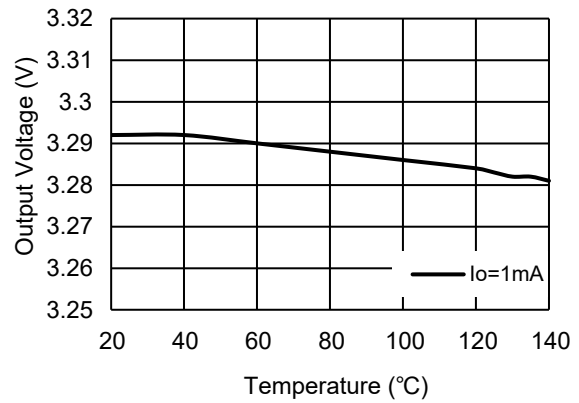

## Power ON/OFF

CH1: VIN CH2: VOUT

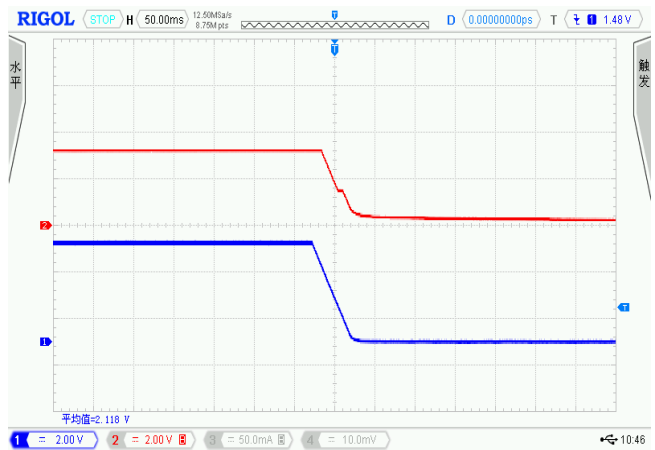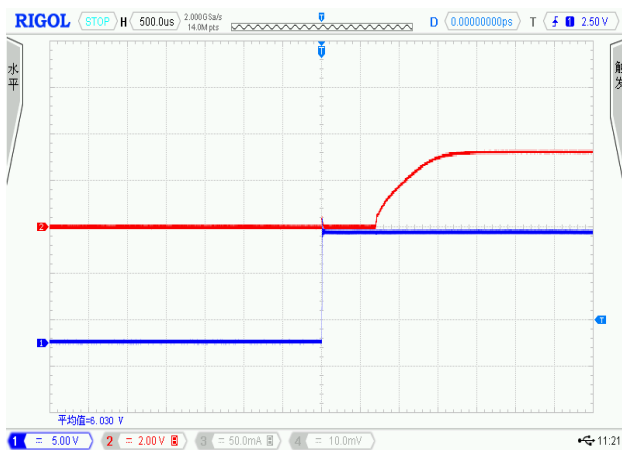







## Line Transient

CH1: VIN CH2: VOUT

VIN=5V to 12V, Io=0A

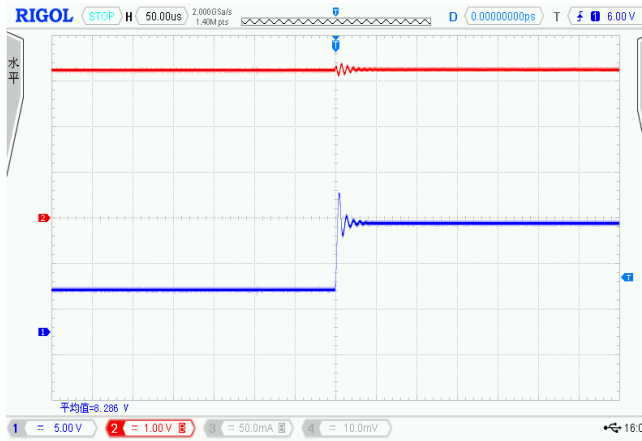


VIN=5V to 12V Io=10mA

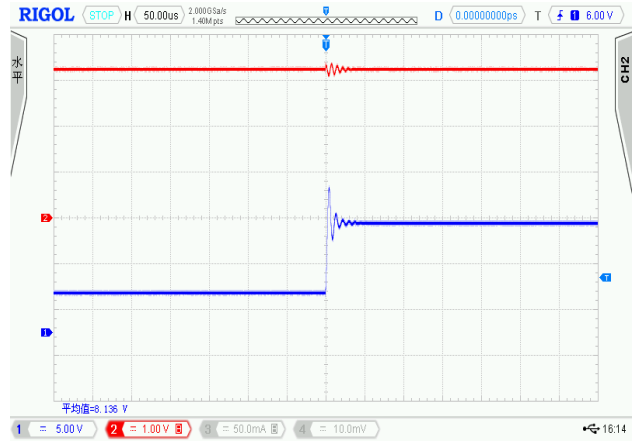

## Load Transient

CH1: IOUT CH2: VIN CH3: VOUT


VIN=12V, VO=3.3V, CIN=1uF, CO=10uF Io=3mA to 100mA VIN=7V, VO=3.3V, CIN=1uF, CO=10uF Io=3mA to 100mA

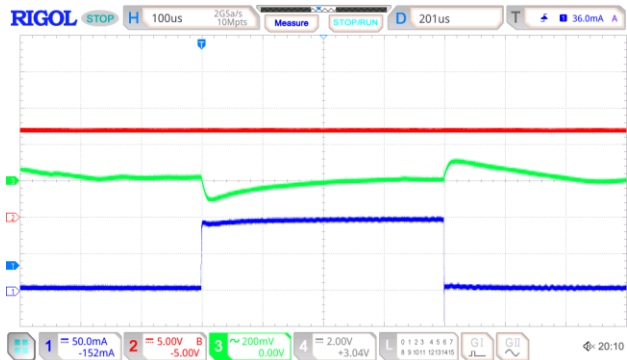

VIN=5V, VO=3.3V, CIN=1uF, CO=10uF Io=3mA to 500mA







VIN=7V, VO=3.3V, CIN=1uF, CO=10uF Io=3mA to 500mA

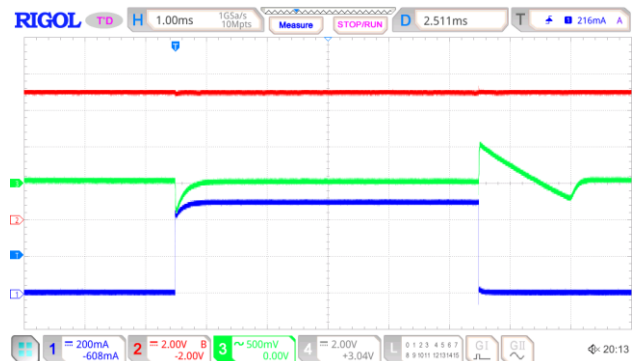

### Package Outline

SOT-23

Dimensions in mm

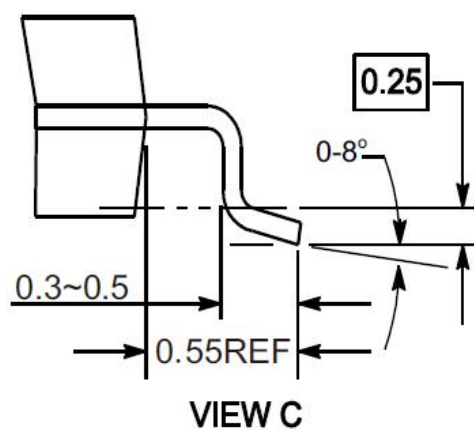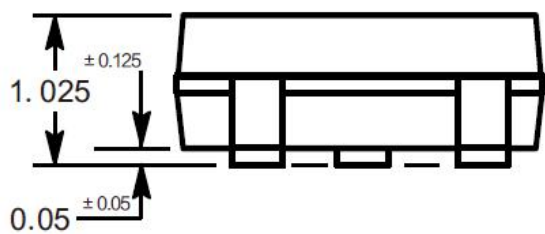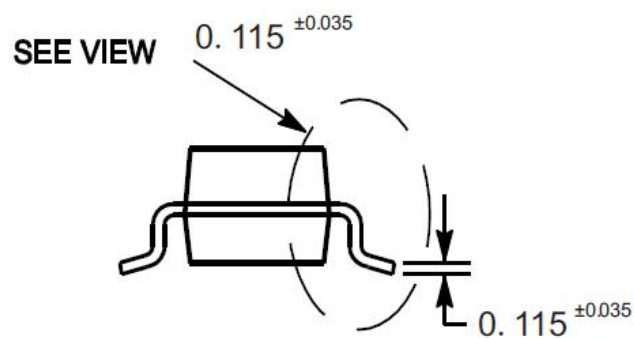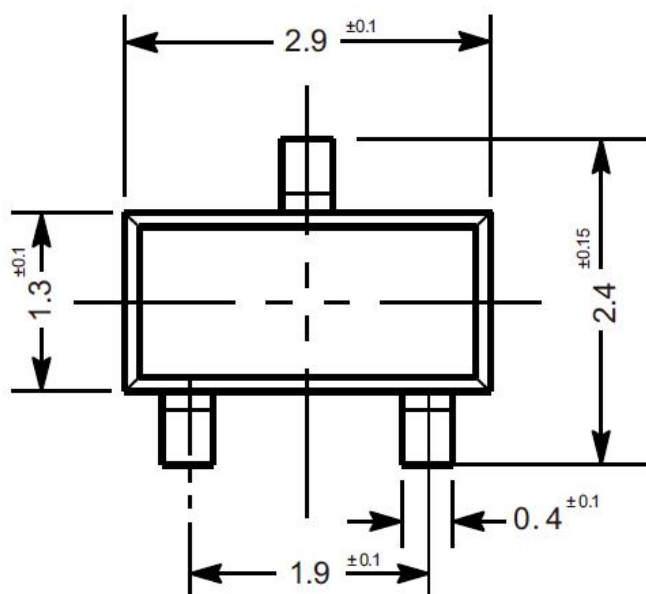






# PJ73H Series Low Dropout Regulators

## Package Outline

SOT-23-3

Dimensions in mm

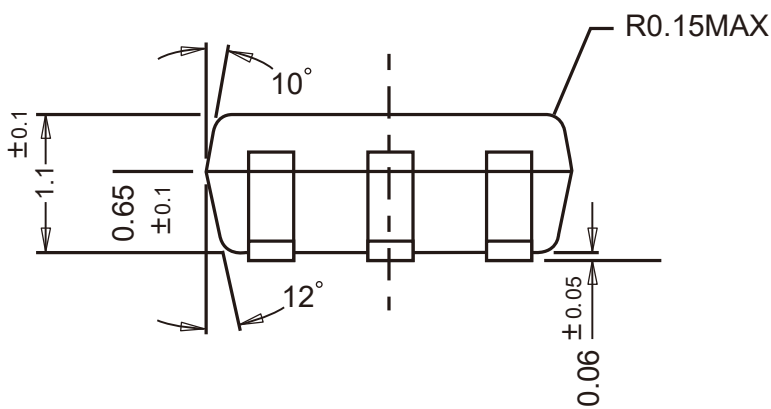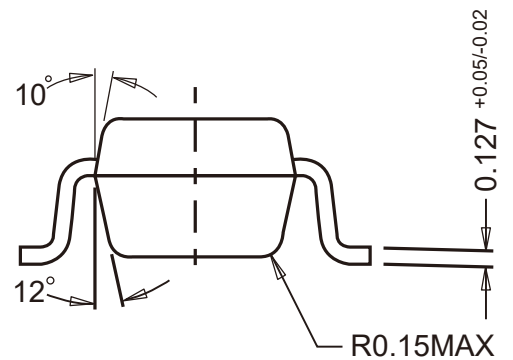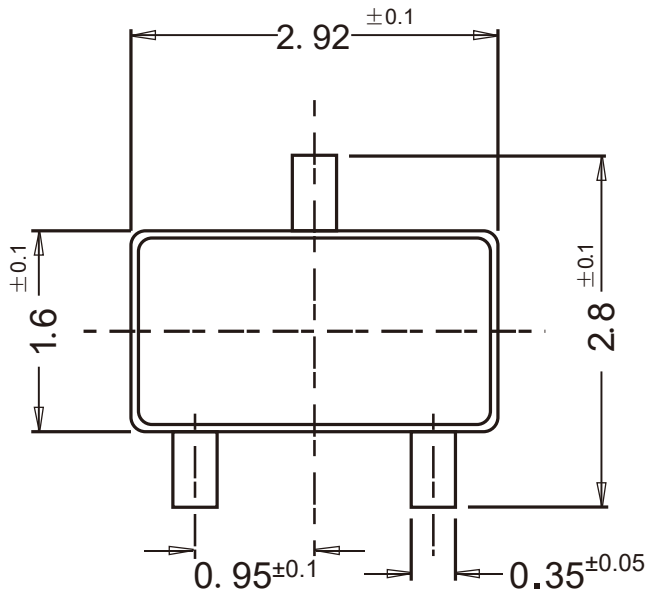




### Package Outline

SOT-89

Dimensions in mm

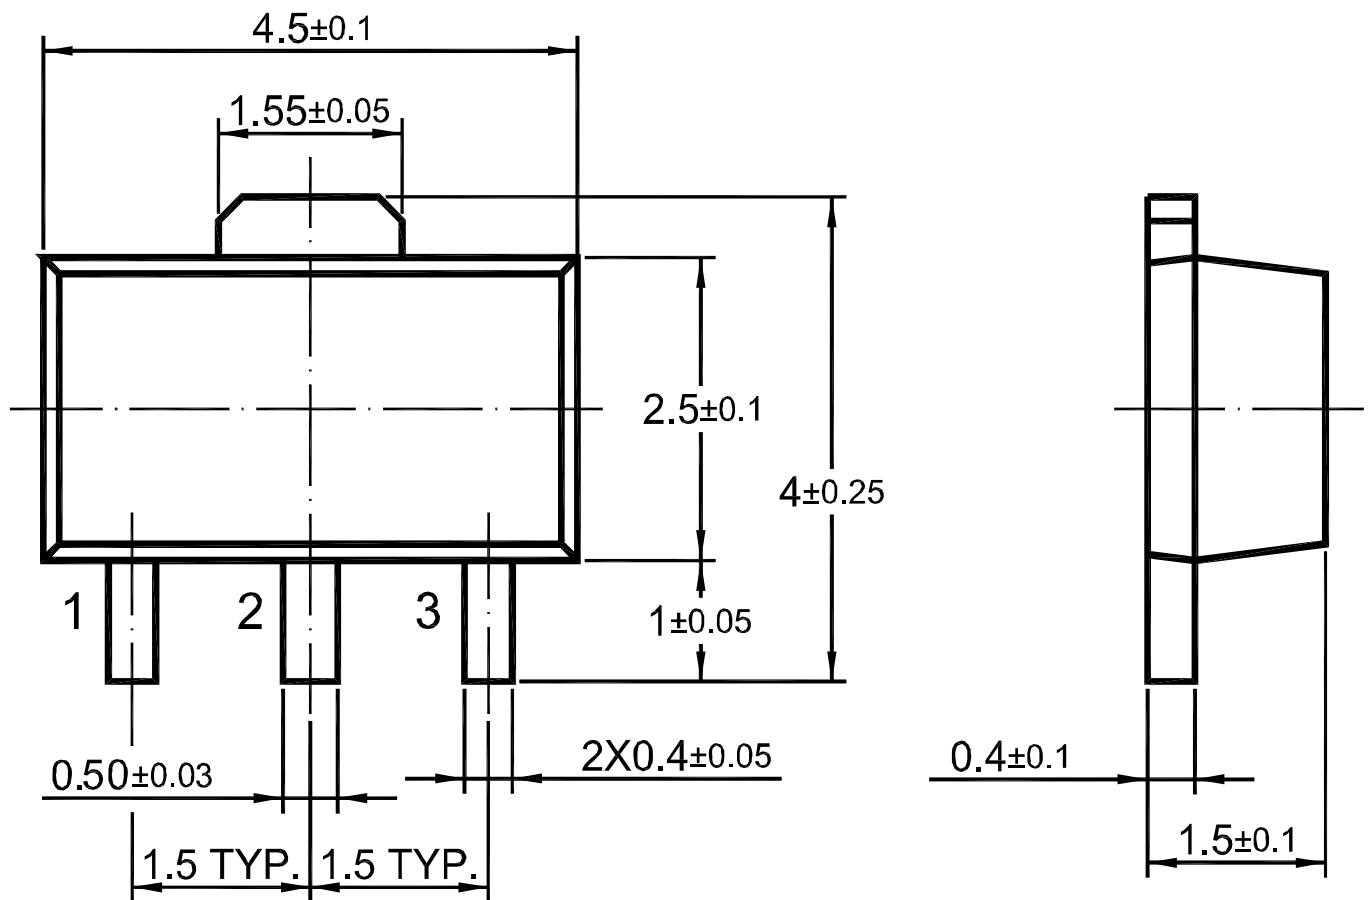






# PJ73H Series Low Dropout Regulators

## Package Outline

SOT-23-5

Dimensions in mm

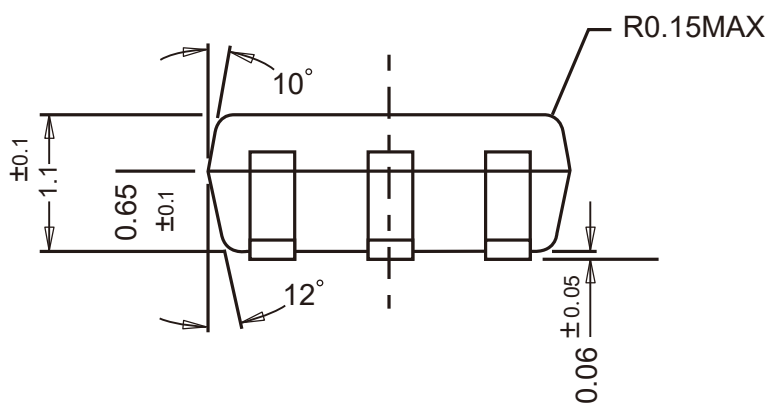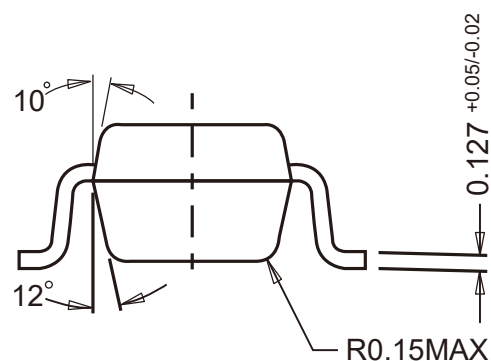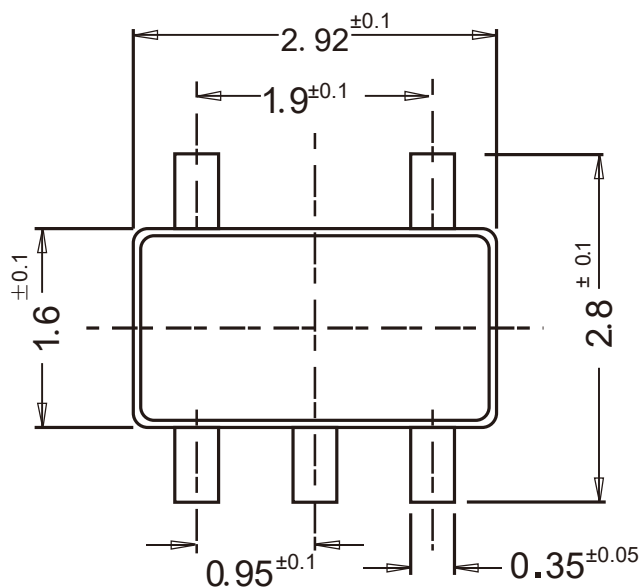

单击下面可查看定价，库存，交付和生命周期等信息

[>>PJSEMI\(平晶微\)](#)