

### TECHNICAL DATA SHEET

**Description**: 824-960/1710-1990MHz PCB

Antenna with coax feed

PART NUMBER: W3502



### **Features:**

- Small form factor
- Size W x L x H (43x 17 x 0.5 mm)
- Low weight (0.8 g)
- Cable feed with I-PEX connector (U.FL compatible)
- Cable length 17.47 mm
- Lead free materials
- **RoHS Compliant Product**
- Mounting options:
- With adhesive tape (not included into antenna)
- Plastic pegs through holes in radiator, heat stacking

# **Applications:**

- Frequency range (GSM 850 / GSM 900 / DCS / PCS)
- 2G / GPRS

All dimensions are in mm / inches

Issue: 2108

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 1-360-944-7551 Downloaded From Oneyac.com

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



### **TECHNICAL DATA SHEET**

**Description**: 824-960/1710-1990MHz PCB

Antenna with coax feed

PART NUMBER: W3502

### **ELECTRICAL SPECIFICATIONS**

Antenna Type PCB + Cable

Frequency 824-960/1710-1990 MHz

Nominal Impedance 50  $\Omega$ 

Return Loss -5dB @ 824-960MHz

-3.5dB @ 1710-1990MHz

Radiation Pattern Omni

Gain 1 dBi

Efficiency 50%

Polarization Vertical

Power Withstanding 1W

## **MECHANICAL SPECIFICATIONS**

PCB size 43 [1.693] x 17 [.669] x 0.5 [.020](with adhesive) mm[inch]

Connector type I-PEX connector (U.FL compatible

Cable type 1.13 mm coaxial

Cable length 17.47 mm

## **ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature -40~85 °C

Storage Temperature -40~85 °C

RoHS Compliant Yes




### **TECHNICAL DATA SHEET**

**Description**: 824-960/1710-1990MHz PCB

Antenna with coax feed

PART NUMBER: W3502

## **MECHANICAL DRAWING**

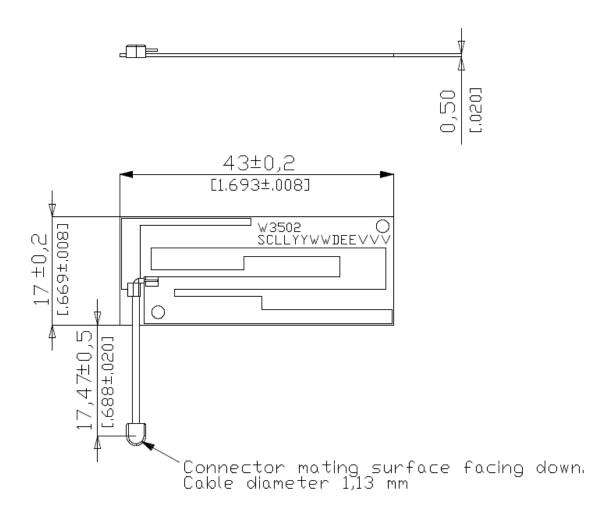



### **TECHNICAL DATA SHEET**


**Description**: 824-960/1710-1990MHz PCB

Antenna with coax feed

PART NUMBER: W3502

### **TEST SETUP**



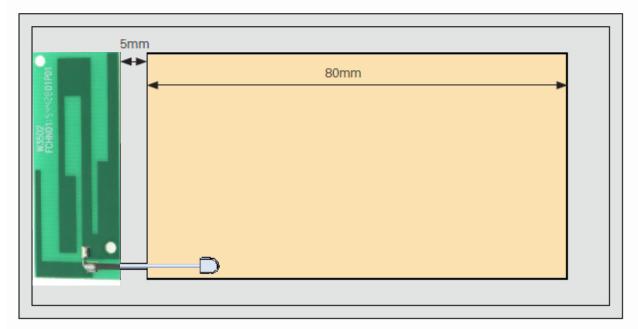



### **TECHNICAL DATA SHEET**


**Description**: 824-960/1710-1990MHz PCB

Antenna with coax feed

PART NUMBER: W3502

## **CHARTS**

## Return Loss

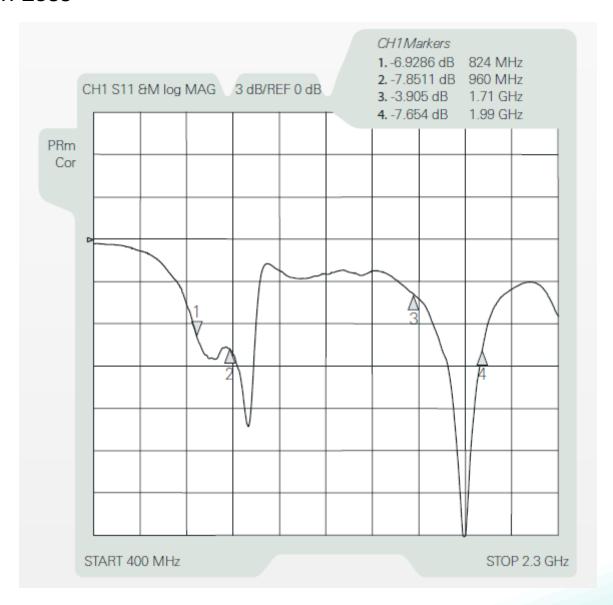



### **TECHNICAL DATA SHEET**


**Description**: 824-960/1710-1990MHz PCB

Antenna with coax feed

PART NUMBER: W3502

## **CHARTS**

# Efficiency

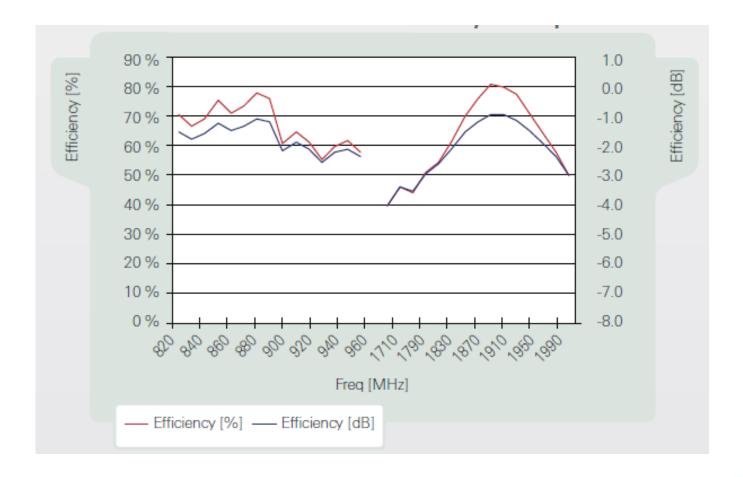





### **TECHNICAL DATA SHEET**


**Description**: 824-960/1710-1990MHz PCB

Antenna with coax feed

PART NUMBER: W3502

## **CHARTS**

## Peak Gain

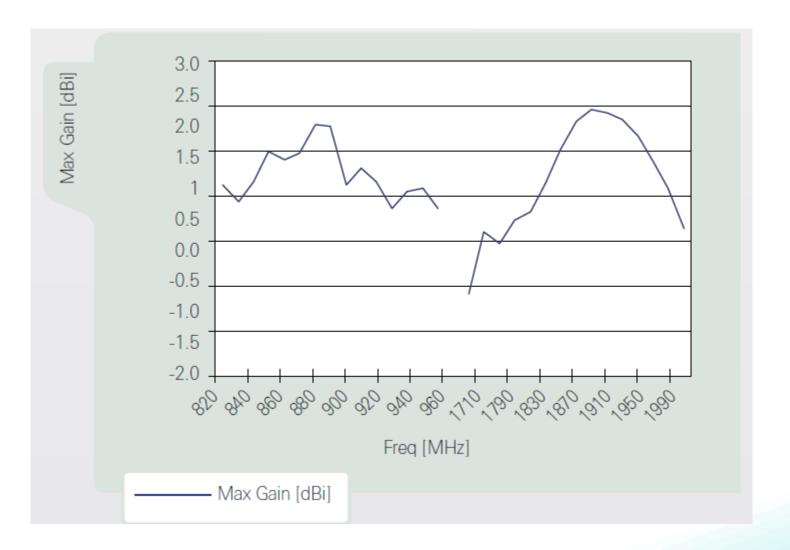



### **TECHNICAL DATA SHEET**


**Description**: 824-960/1710-1990MHz PCB


Antenna with coax feed

**PART NUMBER: W3502** 

## **CHARTS**

# Radiation Pattern

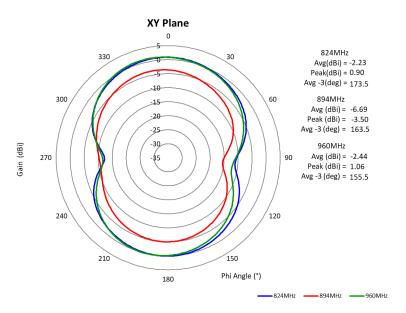

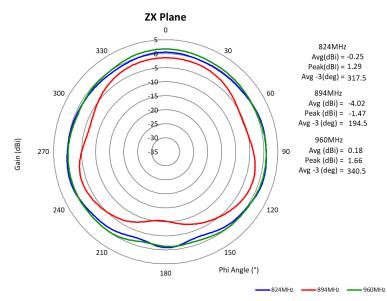







### **TECHNICAL DATA SHEET**


**Description**: 824-960/1710-1990MHz PCB


Antenna with coax feed

**PART NUMBER: W3502** 

## **CHARTS**

# **Radiation Pattern**

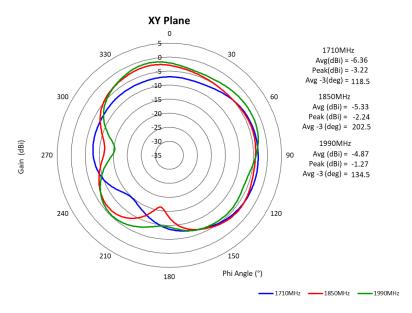

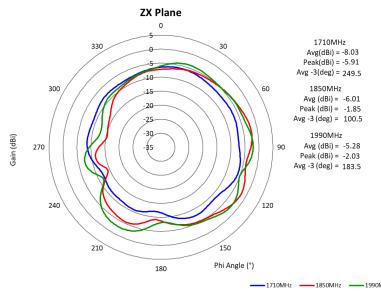







### **TECHNICAL DATA SHEET**

**Description**: 824-960/1710-1990MHz PCB

Antenna with coax feed

PART NUMBER: W3502

## **PACKAGING**

10 PCS/PE bag 10 PE bag/foam bag 12 foam bag/carton box Total 1200 PCS/carton box







# 单击下面可查看定价,库存,交付和生命周期等信息

# >>Pulse(普思)