

Description: RO, 5dBi, 860-930MHz, NF

PART NUMBER: RO8605NFC

Series: Radome Omni

Features:Omnidi

- · Omnidirectional antenna
- Gain 5dBi
- Polarization Vertical
- Connector N-female
- Length 812.4mm
- Power withstanding 50W
- IP67

Applications:

- 860-960MHz radios
- ISM 868 / 915MHz

All dimensions are in mm / inches

Issue:1651

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Tel: 1-360-944-7551 Downloaded From Oneyac.com

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998 1



Description: RO, 5dBi, 860-930MHz, NF

Series: Radome Omni

PART NUMBER: RO8605NFC

ELECTRICAL SPECIFICATIONS

Antenna type Collinear dipole array

Frequency 860-930 MHz

Nominal Impedance 50Ω

VSWR 2:1

Gain 5 dBi

Efficiency 65 % Min

HPBW H-Plane 360 °

HPBW E-Plane 22 °

Polarization Vertical

ESD Protection DC Grounded

Power withstanding 50 W

Connector type N-Female



Description: RO, 5dBi, 860-930MHz, NF

Series: Radome Omni

PART NUMBER: RO8605NFC

MECHANICAL SPECIFICATIONS

Plastic radome Pultruded Fiberglass

Color White

Ingress Protection IP67

Weight 275 g

Wind-loading 201.2 kph (125 mph)

Antenna Length 812.4 mm

ENVIRONMENTAL SPECIFICATIONS

Operating temperature

-40 to +85° C









Series: Radome Omni

PART NUMBER: RO8605NFC

MECHANICAL DRAWING

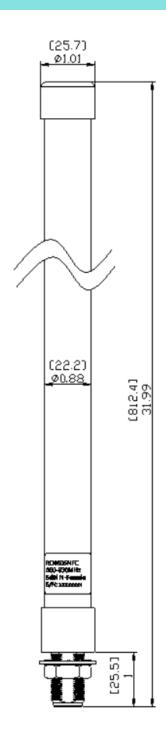

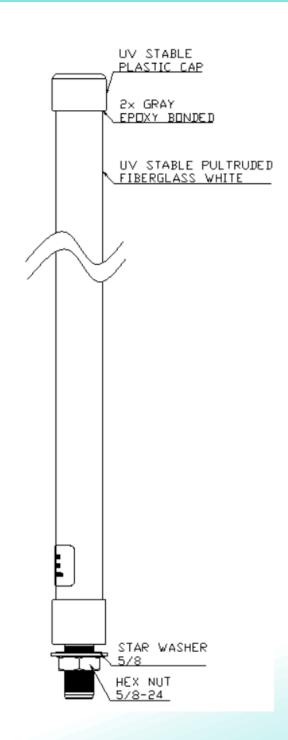






Series: Radome Omni

Issue:1651

PART NUMBER: RO8605NFC

CHARTS

S11 Parameter

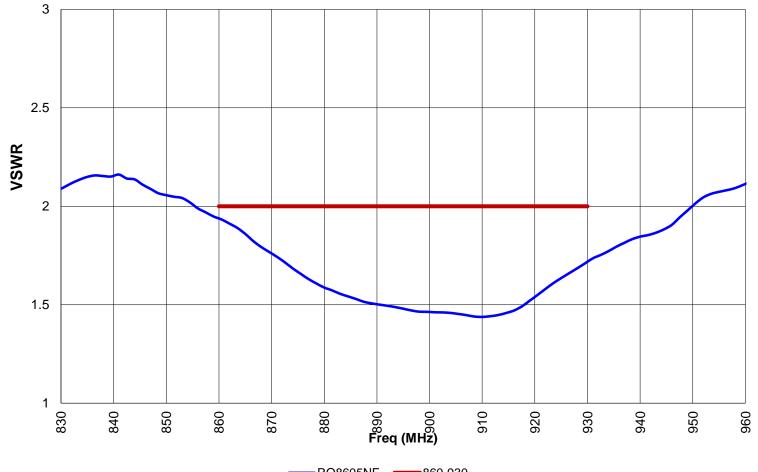

RO8605NF








Series: Radome Omni

PART NUMBER: RO8605NFC

CHARTS

Peak Gain vs Frequency RO8605NF

Measured at Pulse, USA - Aug 22, 2016

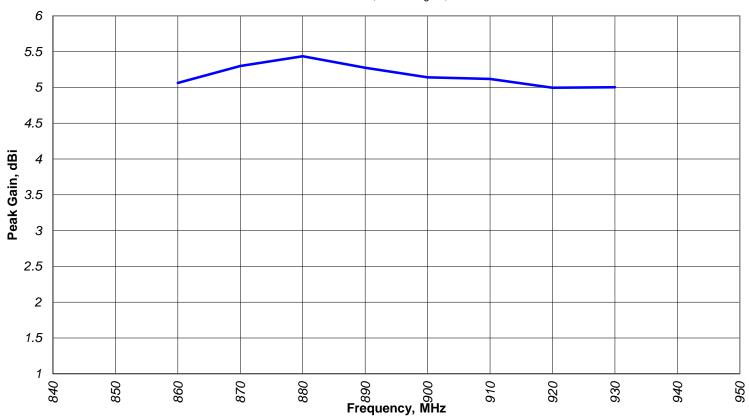

860-930








Series: Radome Omni

PART NUMBER: RO8605NFC

CHARTS

Efficiency vs Frequency RO8605NF

Measured at Pulse, USA - Aug 22, 2016

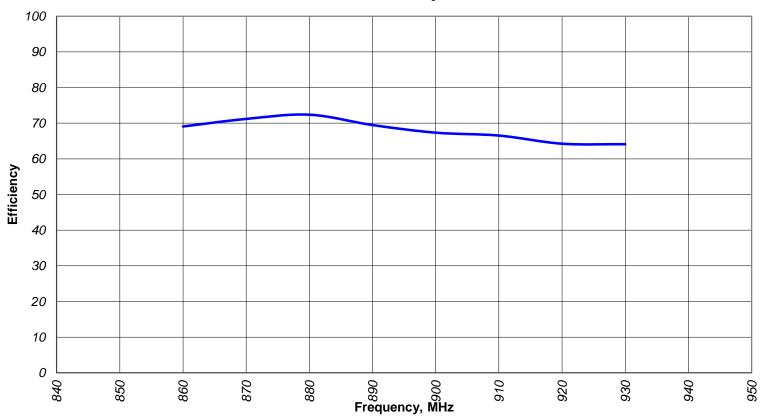

860-930








Series: Radome Omni

PART NUMBER: RO8605NFC

CHARTS

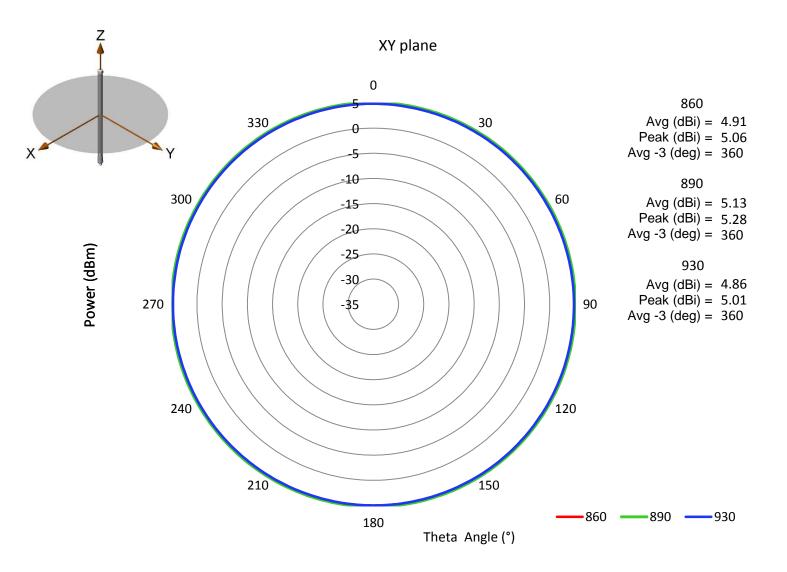






Series: Radome Omni

PART NUMBER: RO8605NFC

CHARTS

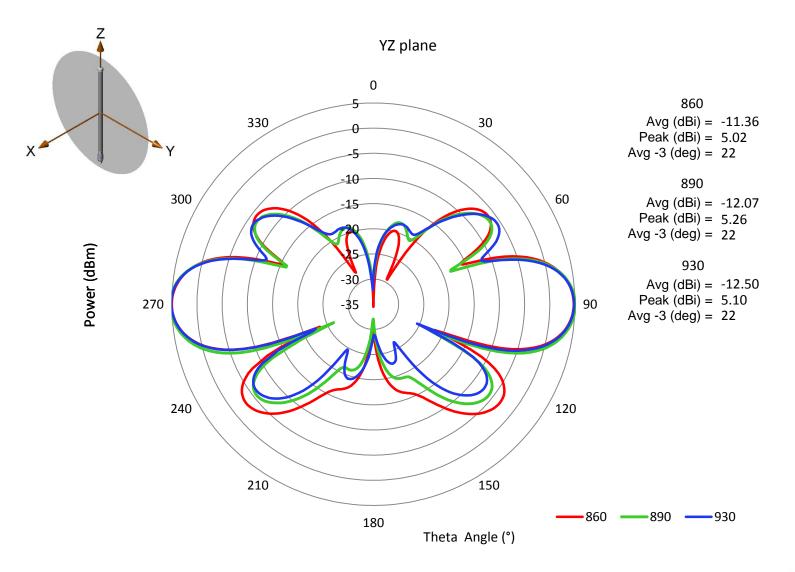



Description: RO, 5dBi, 860-930MHz, NF

Series: Radome Omni

PART NUMBER: RO8605NFC

PACKAGING

Pack each Antenna in PE bag, 40 sets in one carton box with one big PE bag

单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)