PIMinator™ Series Low PIM In-building Omni Antenna with NF Connector



Pulse Part Number DASLTENF



Industry leading -155 dBc certified low Passive Inter-Modulation (PIM) Distributed Antenna System (DAS) In-Building ceiling mount omni antennas. The Pulse Electronics line of DAS in-building low PIM omni antennas meet the most demanding PIM requirements for 2G, 3G, and LTE/4G bands.

These low PIM antennas help meet increasing demand for high data rates and streaming video for mobile devices. The wide band design meets the needs of operators around the world.

Features

- Industry leading -155 dBc PIM rating
- Covers cellular bands, WiFi and WiMAX from 698 through 5900MHz
- Aesthetically pleasing injection molded radome
- PIM certified
- RoHS compliant product
- Patent pending

Applications

In-Building DAS systems requiring best PIM performance

Confidential and Proprietary — Pulse Electronics — All Rights Reserved — 2013

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

San Diego, CA 858 674 8100

Vancouver, WA 360 944 7551

Europe 49 7032 7806 0

Asia 86 755 33966678

North Asia 886 3 4356768

China 86 512 6807 9998

pulseelectronics.com/products/antennas

L157.C (10/13)

PIMinator™ Series Low PIM In-building Omni Antenna with NF Connector

Pulse Part Number DASLTENF

Electrical Specifications


| Frequency [MHz] | | 698-960/1710-2170/ 2300-2700/4900-5900 |
|------------------------------|---|---|
| Nominal Impedance $[\Omega]$ | | 50 |
| VSWR | 698-960 MHz | 1.8:1 |
| | 1710-5900 MHz | 1.5:1 |
| Gain | 698-960 MHz [dBi typ] | 2 |
| | 1710-2700 MHz [dBi typ] | 6 |
| | 4900-5900 MHz [dBi typ] | 8 |
| Radiation | HPBW Horizontal Plane at 45° [°] | 360 |
| | HPBW Vertical Plane (698-960) [° typ] | 85 |
| | HPBW Vertical Plane (1710-5900) [° typ] | 50 |
| Polarization | | Vertical |
| Power Rating [W] | | 50 |
| PIM at 2x20 Watts [dBc] | | -155 |
| Connector | | N Female |

Environmental Specifications

| Operating Temperature [°C] | -40 to +70 |
|----------------------------|------------|
|----------------------------|------------|

Mechanical Specifications

| Radome Material | UV Protected, UL94 V-0 |
|-------------------------------|--|
| Color | White |
| Weight [oz/g] | 17.28 / 490 |
| Overall Height [Inches/mm] | 4.81 / 122.1 |
| Diameter [Inches/mm] | 8.27 / 210.2 |
| Mounting | Ceiling mounting plate (included) [.875"/22.2mm Ø hole] |

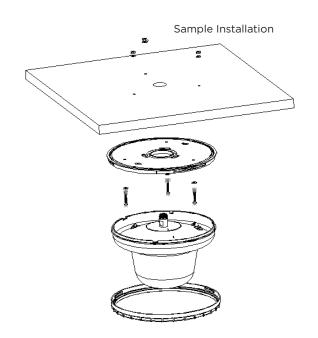




PIMinator™ Series Low PIM In-building Omni Antenna with NF Connector


Pulse Part Number DASLTENF

Radiation Patterns


Horizontal Plane - 698-960 MHz

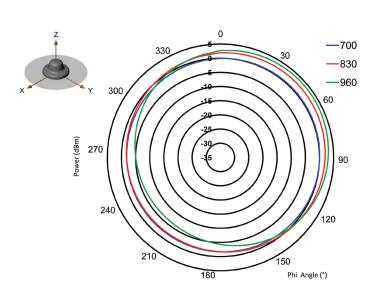


Horizontal Plane - 1710-2170 MHz

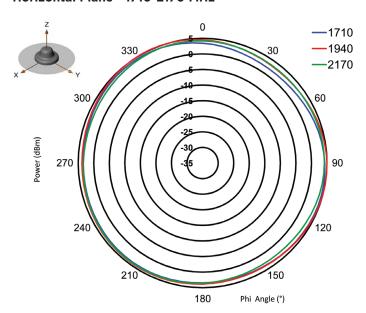

Vertical Plane - 698-960 MHz

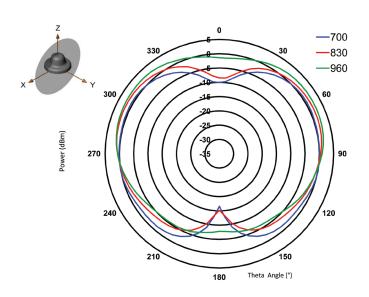

Vertical Plane - 1710-2170 MHz

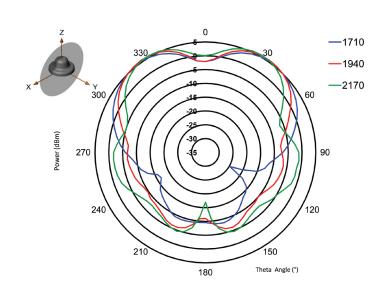


PIMinator™ Series Low PIM In-building Omni Antenna with NF Connector


Pulse Part Number DASLTENF

Radiation Patterns


Horizontal Plane - 2300-2700 MHz

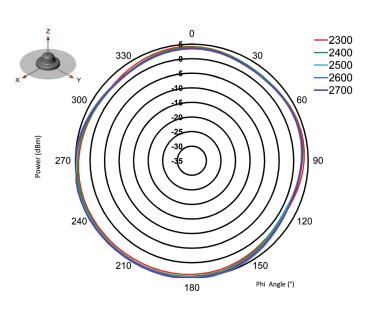


Horizontal Plane - 4900-5900 MHz

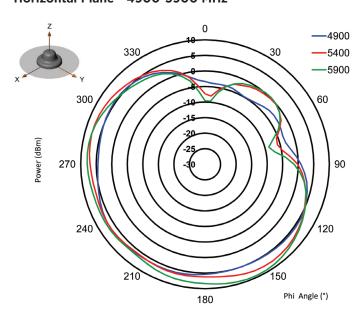

Vertical Plane - 2300-2700 MHz

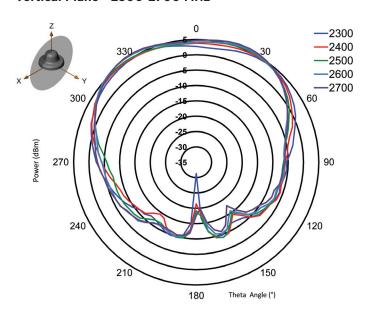

Vertical Plane - 4900-5900 MHz

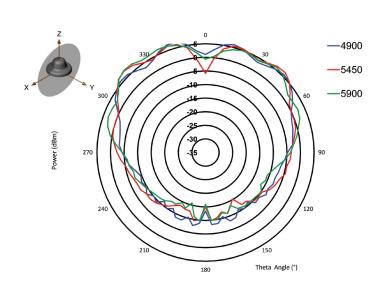

For More Information

Pulse Worldwide Headquarters Larsen Brand Antennas **Europe Headquarters** Asia Headquarters Pulse North Asia Pulse (Suzhou) Wireless Products Co, Inc. 3611 NF 112th Avenue B402. Shenzhen Academy of 12220 World Trade Drive Pulse GmbH & Do. KG 3F, No. 198, Zhongyuan Road 99 Huo Ju Road, (#29 Bldg, 4th Phase) Vancouver, WA 98682 Zhongli City, Taoyuan County 320 San Diego, CA 92128 Zeppelinstrasse 15 Suzhou New District Aerospace Technology Bldg. 10th Kejinan Road, High-Tech Zone Science & Tech Industrial Park Herrenberg Taiwan R. O. C. Nanshan District, Shenzen, PR China 518057 Jiangsu Province, Suzhou 215009 PR China Tel: 858 674 8100 Tel: 360 944 7551 Tel: 49 7032 7806 0 Tel: 86 755 33966678 Tel: 886 3 4356768 Tel: 86 512 6807 9998 Fax: 858 674 8262 Fax: 369 944 7556 Fax: 86 512 6809 8023

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2010. Pulse Electronics, Inc. All rights reserved.





单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse(普思)