


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD NEW P/N	10/28/05 JAMYIN	

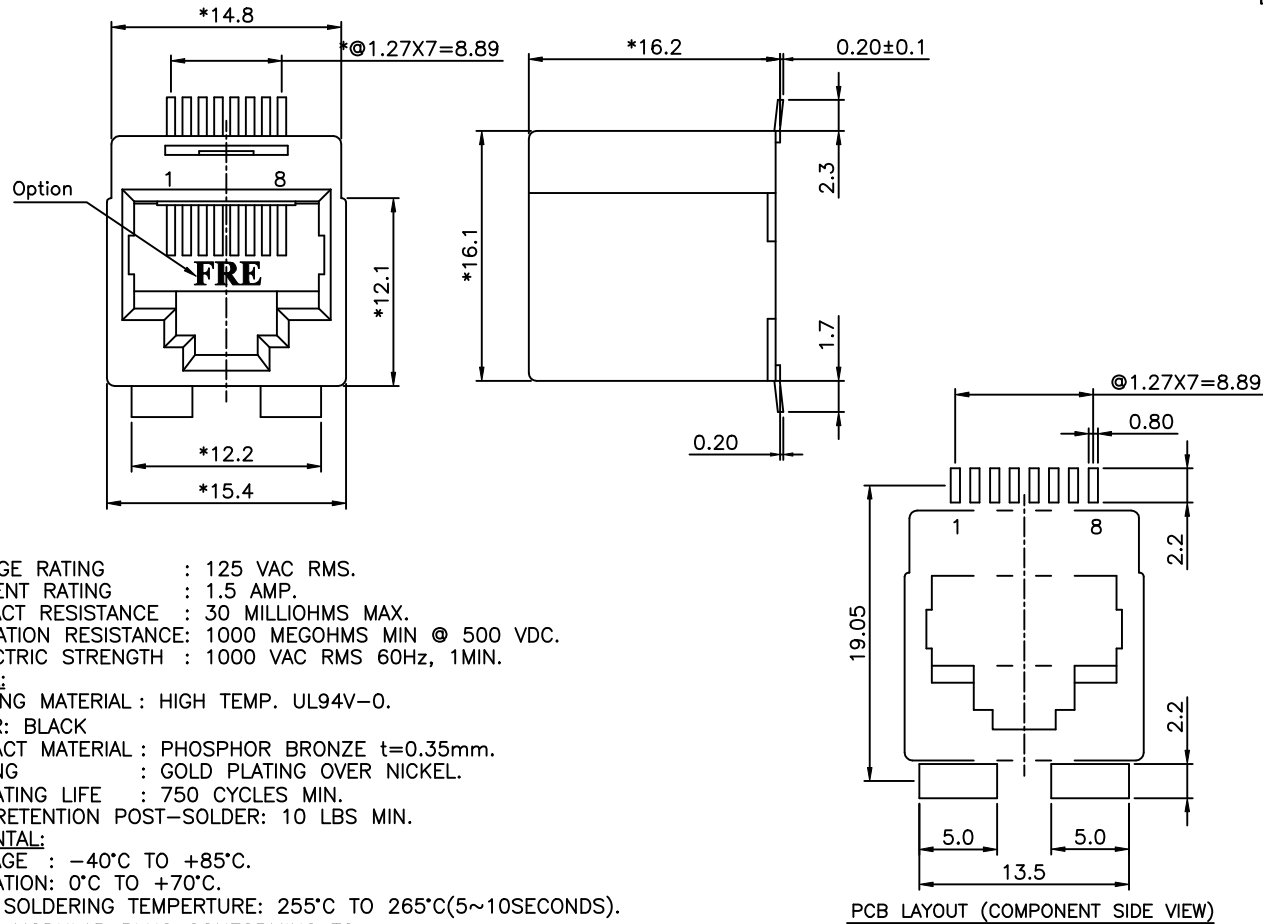

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : HIGH TEMP. UL94V-0.
COLOR: BLACK
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- WAVE SOLDERING TEMPERATURE: 255°C TO 265°C(5~10SECONDS).

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS PART NUMBER: E528X-X00XBX-L



DETACHED LISTS	MM (INCH)		DFTO JAMYIN	DATE 10/24/05	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKDANKUE	DATE 2005/10/28		
	MM	±	MFO	DATE	TITLE TOP ENTRY PCB JACK 8P SMT	
	.0 ±0.2	±	APPVLLUSHNEG	DATE 2005/10/28		
	.00 ±0.15	±	MATERIAL :	DRAWING NO. GE523007-LA		SIZE A3
.000 ±0.075	±	ANGLES ± 0.01°	QT'Y :	/PART NO. SEE NOTE		REV 1 10/24/05
THIRD ANGLE PROJECTION		FINISH :	SCALE : 3:1	DO NOT SCALE DRAWING		SHEET X OF Y

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)