
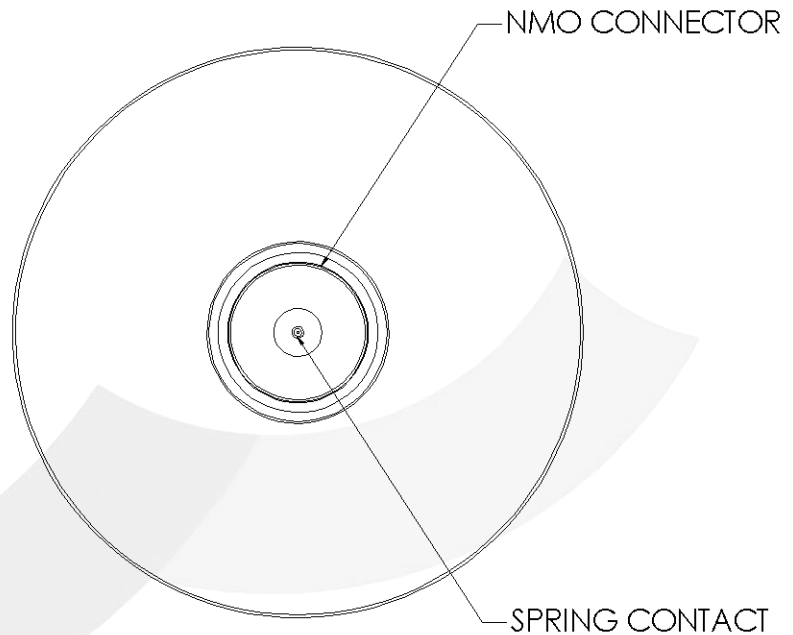
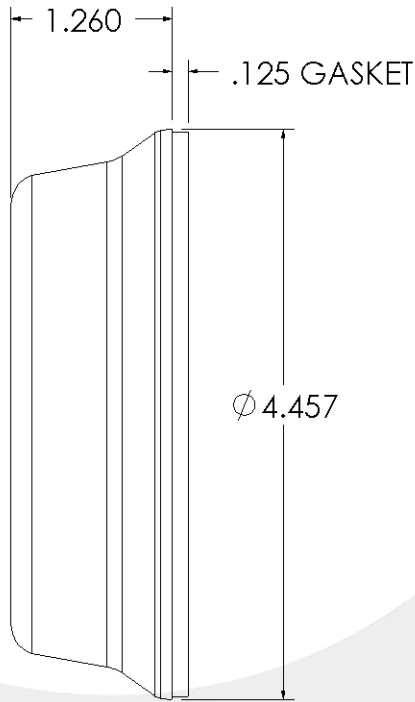


BLACK/WHITE LOW-PROFILE UTILITY 806-960 MHz

NMO MOUNTED

**LP800NMO
LP800NMOW**

Series : ANTENNA

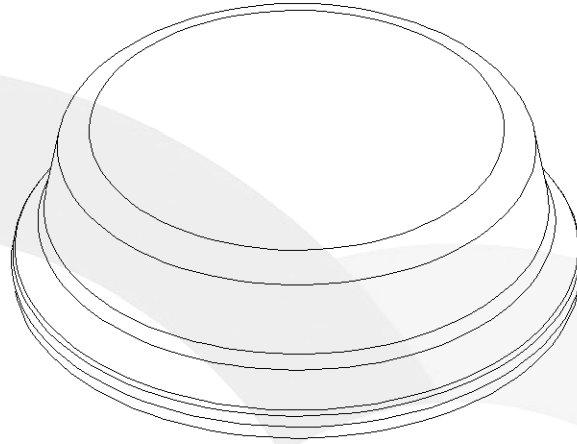

All dimensions are in inches

Issue : 0711

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



BLACK/WHITE LOW-PROFILE UTY 806-960 MHz**NMO MOUNTED****LP800NMO
LP800NMOW**
Series : ANTENNA**ELECTRICAL SPECIFICATIONS**

Frequency :.....	806-960 MHz
Nominal Impedance :.....	50 Ω
VSWR :.....	2:1 Max
Gain (Omni directional 0°) :.....	-2.2 dBi ± 1 dB
Gain (Peak) :.....	4.4 dBi ± 1 dB
Polarization :.....	Vertical
Power withstanding :.....	100 W
Connector type :.....	NMO

MECHANICAL SPECIFICATIONS

Plastic radome :.....	Mackroblend
Color :.....	Black/White
Weight :.....	159 g

ENVIRONMENTAL SPECIFICATIONS

Operating temperature :.....	-40/70 °C
------------------------------	------------------

OTHERS SPECIFICATIONS

Installation: 1 full turn min.

Issue : 0711

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



BLACK/WHITE LOW-PROFILE UTY 806-960 MHz




**LP800NMO
LP800NMOW**

NMO MOUNTED

Series : ANTENNA

CURVES

Measured on Ø40" Ground plane

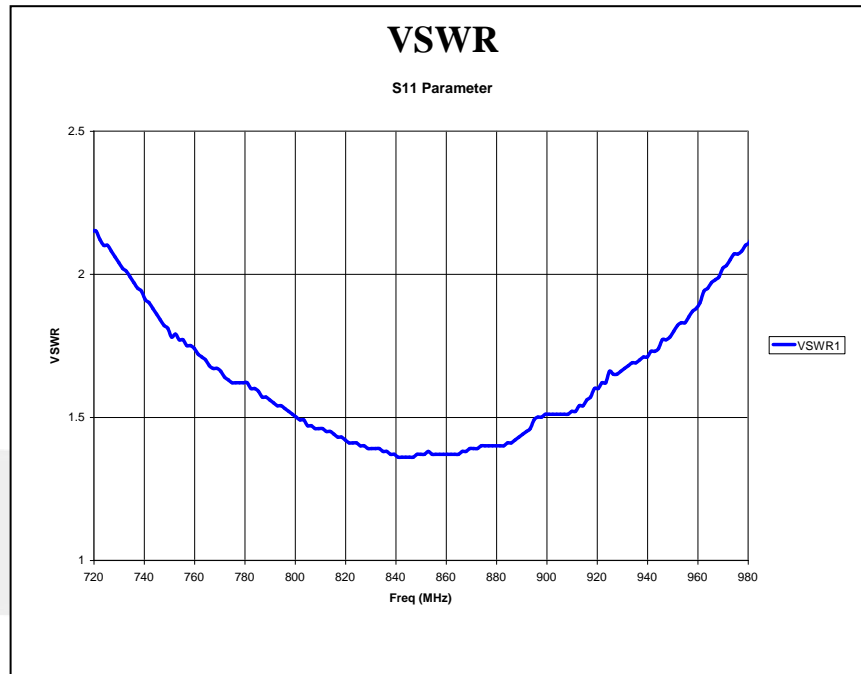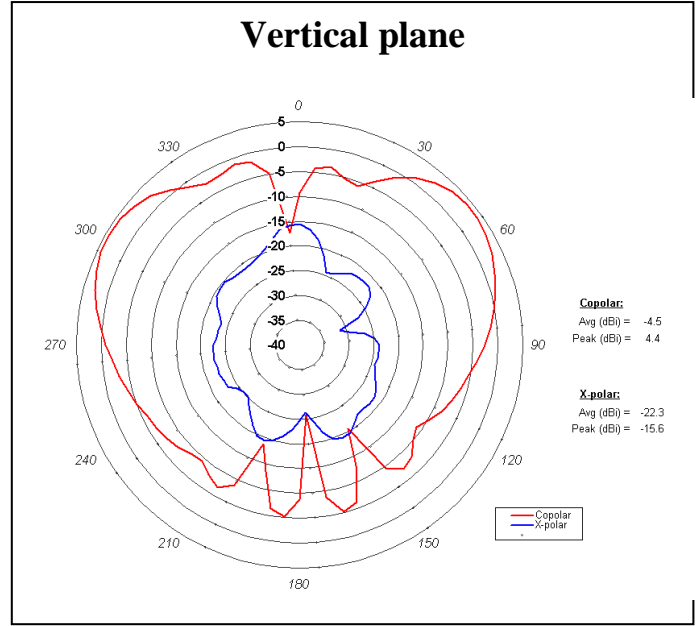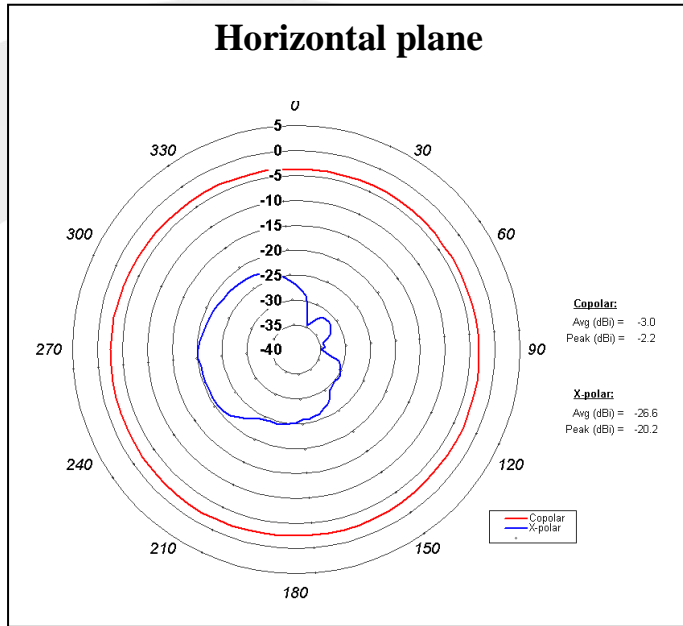

Issue : 0711

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)