

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- SHIELD MATERIAL : BRASS C2680 t=0.25mm.
- HOUSING MATERIAL : FR52
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : SHIELD PLATED Sn/Pb OVER NICKEL.
CONTACT GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDER TEMPERTURE: 255°C TO 265°C 5~10 SECOND.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS P/N: E5288-XX0B4X-L

R3-TIN	1- 3u"	2- 6u"
RY-NICKEL	3-15u"	4-30u"
R4-W/ Nickel,Tinned Solder Tab	5-50u"	

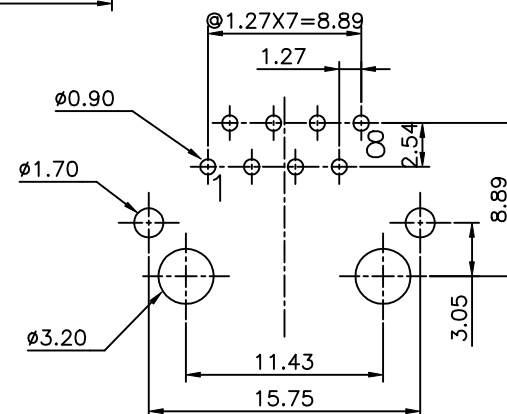

PC Board Layout

DETACHED LISTS	MM (INCH)		DFTO ANKUE	DATE 6/17/2005	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKD YICAN	DATE 2005/06/18		
	MM	±	MFO	DATE	TITLE (DIP & IMPROVED TYPE) RJ45 TOP ENTRY PCB JACK	
	.0 ± 0.2	±	APPVLLUSHENG	DATE 2005/06/18		
.00 ± 0.15	±	MATERIAL :		DRAWING NO. GE523096-LA		
.000 ± 0.075	±	ANGLES ± 0.5		/PART NO. SEE NOTE		
THIRD ANGLE PROJECTION		FINISH :		DO NOT SCALE DRAWING		
SCALE : 3:1		QT'Y :		SHEET OF		
		SCALE : 3:1		SIZE A3		
				REV 0		

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)